

**Global Positioning System (GPS)
Standard Positioning Service (SPS)
Performance Analysis Report**

Submitted To

**Federal Aviation Administration
GPS Product Team
1284 Maryland Avenue SW
Washington, DC 20024**

Report #95

October 31, 2016

Reporting Period: 1 July – 30 September 2016

Submitted by

**William J. Hughes Technical Center
WAAS T&E Team
Atlantic City International Airport, NJ 08405**

Executive Summary

The GPS Product Team has tasked the Navigation Systems Verification and Monitoring Branch at the William J. Hughes Technical Center to document the Global Positioning System (GPS) Standard Positioning Service (SPS) performance in quarterly GPS Performance Analysis (PAN) Reports. The report contains the analysis performed on data collected at twenty-eight Wide Area Augmentation System (WAAS) Reference Stations. This analysis verifies the GPS SPS performance as compared to the performance parameters stated in the SPS Specification (September 2008).

This report, Report #95, includes data collected from 1 July through 30 September 2016. The next quarterly report will be issued January 31, 2017.

Analysis of this data includes the following standards and categories: PDOP Availability, NANU Summary and Evaluation, Service Availability, Position and Range Accuracy and Solar Storm Effects on GPS SPS performance.

PDOP availability is based on Position Dilution of Precision (PDOP). Utilizing the weekly almanac posted on the US Coast Guard navigation web site, the coverage for every 5° grid point between 180W to 180E and 80S and 80N was calculated for every minute over a 24-hour period for each of the weeks covered in the reporting period. For this reporting period, the global availability based on PDOP less than six for CONUS was 100%.

NANU summary and evaluation was achieved by reviewing the “Notice: Advisory to Navstar Users” (NANU) reports issued between 1 July and 30 September 2016. Using this data, we compute a set of statistics that give a relative idea of constellation health for both the current and combined history of past quarters. A total of fourteen outages were reported in the NANU’s this quarter. Twelve outages were scheduled ahead of time, while two unscheduled NANUs occurred.

The quarterly service availability standard was verified using 24-hour position accuracy values computed from data collected at one-second intervals. All of the sites achieved a 100% availability, which exceeds the SPS “average location” value of 99% and the “worst-case location” value of 90%.

Calculating the 24-hour 95% horizontal and vertical position error values verified the accuracy standards. The User Range Error standard was verified for each satellite from 24-hour accuracy values computed using data collected at the following six sites: Boston, Honolulu, Los Angeles, Miami, San Juan and Juneau. This data was also collected in one-second samples. All sites achieved 100% reliability, meeting the SPS specification. The maximum range error recorded was 16.896 meters on Satellite PRN 15. The SPS specification states that the range error should never exceed 30 meters for less than 99.79% of the day for a worst-case point and 99.94% globally. The maximum RMS range error value of 2.006 was recorded on satellite PRN 22. The SPS specification states that RMS URE cannot exceed 6 meters in any 24-hour interval.

Geomagnetic storms had little to no effect on GPS performance this quarter. All sites met all GPS Standard Positioning Service (SPS) specifications on those days with the most significant solar activity.

The IGS is a voluntary federation of many worldwide agencies that pool resources and permanent GNSS station data to generate precise GNSS products. During the evaluation period, the maximum 95% horizontal and vertical SPS errors were 4.86 meters at Maspalomas, Spain and 5.07 meters at Bogota, Colombia respectively.

From the analysis performed on data collected between 1 July and 30 September 2016, the GPS performance met all SPS requirements that were evaluated.

Table of Contents

List of Figures	4
List of Tables	5
1 Introduction.....	6
1.1 Objective of GPS SPS Performance Analysis Report.....	6
1.2 Report Overview	7
1.3 Summary of Performance Requirements and Metrics	7
2 PDOP Availability Standard	12
3 NANU Summary and Evaluation	15
3.1 Satellite Outages from NANU Reports.....	15
3.2 Service Availability Standard	18
4 Service Reliability Standard.....	20
5 Accuracy Standard	21
5.1 Position Accuracy	22
5.2 Time Transfer Accuracy	24
5.3 Range Domain Accuracy	25
6 Solar Storms.....	31
7 IGS Data.....	34
8 RAIM Performance.....	37
8.1 Site Performance.....	37
8.2 RAIM Coverage.....	38
8.3 RAIM Airport Analysis	41
9 GPS Test NOTAMs Summary.....	45
9.1 GPS Test NOTAMs Issued	45
9.2 Tracking and Trending of GPS Test NOTAMs	45
9.3 GPS Availability	48
10 Appendices.....	51
10.1 Appendix A: Performance Summary	51
10.2 Appendix B: Geomagnetic Data	54
10.3 Appendix C: Performance Analysis (PAN) Problem Report.....	56

10.4 Appendix D: Glossary.....	57
11 GPS Broadcast Orbit Versus NGA Precise Orbits and URA (IAURA) Bounding Analyses.....	60

List of Figures

Figure 2-1 World GPS Maximum PDOP	13
Figure 2-2 Satellite Visibility Profile for Worst-Case Point.....	14
Figure 5-1 Global Vertical Error Histogram.....	23
Figure 5-2 Global Horizontal Error Histogram.....	23
Figure 5-3 Time Transfer Error	24
Figure 5-4 Distribution of Daily Max Range Errors.....	28
Figure 5-5 Distribution of Daily Max Range Rate Errors.....	28
Figure 5-6 Distribution of Daily max Range Acceleration Errors.....	29
Figure 5-7 Range Error Histogram	29
Figure 5-8 Maximum Range Error Per Satellite	30
Figure 5-9 Maximum Range Rate Error Per Satellite.....	30
Figure 5-10 Maximum Range Acceleration Error Per Satellite.....	30
Figure 6-1 K-Index for 1-3 September 2016	32
Figure 6-2 K-Index for 27-29 September 2016	32
Figure 6-3 K-Index for 2-4 August 2016.....	32
Figure 7-1 Selected IGS Site Locations.....	35
Figure 7-2 GPS SPS 95% Horizontal Accuracy Trends at Selected IGS Sites.....	36
Figure 7-3 GPS SPS 95% Vertical Accuracy Trends at Selected IGS Sites.....	36
Figure 8-1 RAIM RNP 0.1 Coverage	39
Figure 8-2 RAIM RNP 0.3 Coverage	39
Figure 8-3 RAIM World Wide Coverage Trend.....	40
Figure 8-4 RAIM RNP Coverage Trend for WAAS NPA Service Area.....	40
Figure 8-5 RAIM RNP 0.1 Airport Availability.....	41
Figure 8-6 RAIM RNP 0.3 Airport Availability.....	42
Figure 8-7 RAIM RNP 0.1 Airport Outages.....	43
Figure 8-8 RAIM RNP 0.3 Airport Outages.....	44
Figure 9-1 GPS Test NOTAMs @ FL400	46
Figure 9-2 GPS NOTAMs @ FL250.....	46
Figure 9-3 GPS NOTAMs @ 10k Feet.....	47
Figure 9-4 GPS NOTAMs @ 4k Feet.....	47
Figure 9-5 GPS NOTAMs @ 50 Feet.....	47
Figure 11-1 GPS Broadcast Orbit Accuracy Standard Deviation Plots	62

Figure 11-2 Broadcast Ephemeris vs. NGA Precise Data Availability Plots	64
Figure 11-3 Current GPS Constellation	64
Figure 11-4 URA Over-Bounding Plots	65
Figure 11-5 Orbit Error Plots For All Satellites	66

List of Tables

Table 1-1 SPS SIS Performance Requirements Standards	8
Table 2-1 PDOP Availability Statistics	12
Table 3-1 NANUs Affecting Satellite Availability.....	15
Table 3-2 NANUs Forecasted to Affect Satellite Availability	16
Table 3-3 Cancelled NANUs	16
Table 3-4 GPS Satellite Maintenance Statistics.....	17
Table 3-5 Accuracies Exceeding Threshold Statistics	19
Table 4-1 User Range Error Accuracy.....	20
Table 5-1 Horizontal & Vertical Accuracy Statistics for the Quarter.....	22
Table 5-2 Range Error Statistics	25
Table 5-3 Range Rate Error Statistics.....	26
Table 5-4 Range Acceleration Error Statistics.....	27
Table 6-1 Horizontal & Vertical Accuracy Statistics for September 2, 2016.....	33
Table 7-1 Selected IGS Site Information.....	34
Table 7-2 GPS SPS Performance at Selected High Rate IGS Sites	35
Table 8-1 RAIM Site Statistics	38
Table 9-1 GPS test NOTAM Durations.....	45
Table 9-2 GPS Test NOTAM Affected Areas (Square Miles) by Altitude	45
Table 9-3 NOTAM Impact to GPS Availability	48
Table 10-1 Performance Summary	51

1 Introduction

1.1 Objective of GPS SPS Performance Analysis Report

In 1993, the FAA began monitoring and analyzing Global Positioning System (GPS) Standard Positioning Service (SPS) performance data. At present, the FAA has approved GPS and WAAS for IFR operations and is further developing WAAS as a GPS augmentation system. In order to ensure the safe and effective use of GPS and its augmentation systems within the NAS, it is critical that characteristics of GPS performance as well as specific causes for service outages be monitored and understood. To accomplish this objective, GPS SPS performance data is documented in a quarterly GPS Analysis report. This report contains data collected at the following twenty-eight WAAS reference station locations:

- Bethel, AK
- Billings, MT
- Fairbanks, AK
- Cold Bay, AK
- Kotzebue, AK
- Juneau, AK
- Albuquerque, NM
- Anchorage, AK
- Boston, MA
- Washington, D.C.
- Honolulu, HI
- Houston, TX
- Kansas city, KS
- Los Angeles, CA
- Salt Lake City, UT
- Miami, FL
- Minneapolis, MI
- Oakland, CA
- Cleveland, OH
- Seattle, WA
- San Juan, PR
- Atlanta, GA
- Barrow, AK
- Merida, Mexico
- Gander, Canada
- Tapachula, Mexico
- San Jose Del Cabo, Mexico
- Iqaluit, Canada

The analysis of the data is divided into the four performance categories stated in the Standard Positioning Service Performance Specification (September 2008). These categories are:

- PDOP Availability Standard
- Service Availability Standard
- Service Reliability Standard
- Positioning, Ranging and Timing Accuracy Standard

The results were then compared to the performance parameters stated in the SPS.

1.2 Report Overview

Section 2 of this report summarizes the results obtained from the coverage calculation program developed by the WAAS test team at the William J. Hughes Technical Center. The SPS coverage area program uses the GPS satellite almanacs to compute each satellite position as a function of time for a selected day of the week. This program establishes a 5-degree grid between 180 degrees east and 180 degrees west, and from 80 degrees north and 80 degrees south. The program then computes the PDOP at each grid point (1485 total grid points) every minute for the entire day and stores the results. After the PDOP's have been saved the 99.99% index of 1-minute PDOP at each grid point is determined and plotted as contour lines (Figure 2-1). The program also saves the number of satellites used in PDOP calculation at each grid point for analysis.

Section 3 summarizes the GPS constellation performance by providing the “Notice: Advisory to Navstar Users” (NANU) messages to calculate the total time of forecasted and actual satellite outages. This section also evaluates the Service Availability Standard using 24-hour 95% horizontal and vertical position accuracy values.

Section 4 summarizes service reliability performance. Although the specification calls for yearly evaluations, this SPS requirement will be reported at quarterly intervals.

Section 5 provides the position accuracies based on data collected on a daily basis at one-second intervals. This section also provides the statistics on the range error, range error rate and range acceleration error for each satellite. The overall average, maximum, minimum and standard deviations of the range rates and accelerations are tabulated for each satellite.

In Section 6, the data collected during solar storms is analyzed to determine the effects, if any, of GPS SPS performance.

Section 7 provides an analysis of GPS-SPS accuracy performance from a selection of high rate IGS stations around the world.

Section 8 provides a summary of GPS Test NOTAMs.

Section 9 provides four appendices to summarize the data found in this report and provide further information.

Appendix A provides a summary of all the results as compared to the SPS specification.

Appendix B provides the geomagnetic data used for Section 6.

Appendix C provides a PAN Problem Report.

Appendix D provides a glossary of terms used in this PAN report. This glossary was obtained directly from the GPS SPS specification document (September 2008).

1.3 Summary of Performance Requirements and Metrics

Table 1-1 over the next four pages lists the performance parameters from the SPS and identifies those parameters verified in this report.

Table 1-1 SPS SIS Performance Requirements Standards

Per-Satellite Coverage	Conditions and Constraints	Evaluated in This Report
Terrestrial Service Volume: 100% Coverage Space Service Volume: No Coverage Performance Specified	<ul style="list-style-type: none"> For any health or marginal SPS SIS 	✓
Constellation Coverage	Conditions and Constraints	
Terrestrial Service Volume: 100% Coverage Space Service Volume: No Coverage Performance Specified	<ul style="list-style-type: none"> For any healthy or marginal SPS SIS 	✓
User Range Error Accuracy	Conditions and Constraints	
Single Frequency C/A-Code <ul style="list-style-type: none"> ≤ 7.8m 95% Global Average URE during normal operations over All AODs ≤ 6.0m 95% Global Average URE during operations at Zero AOD ≤ 12.8m 95% Global Average URE during normal operations at Any AOD 	<ul style="list-style-type: none"> For any healthy SPS SIS Neglecting single-frequency ionospheric delay model errors Including group delay time correction (T_{GD}) errors at L1 Including inter-signal bias (P(Y)-code to C/A-code) errors at L1 	✓
Single Frequency C/A-Code <ul style="list-style-type: none"> ≤ 30m 99.94% Global Average URE during normal operations ≤ 30m 99.79% Worst Case single point average during normal operations. 	<ul style="list-style-type: none"> For any healthy SPS SIS. Neglecting single-frequency ionospheric delay model errors Including group delay time correction (T_{GD}) errors at L1 Including inter-signal bias (P(Y)-code to C/A-code) errors at L1 Standard based on measurement interval of one year; average of daily values within service volume Standard based on 3 service failures per year, lasting no more than 6 hours each 	✓
User Range Rate Error Accuracy	Conditions and Constraints	
Single-Frequency C/A-Code: <ul style="list-style-type: none"> ≤ 6 mm/sec 95% Global Average URRE over any 3-second interval during normal operations at Any AOD 	<ul style="list-style-type: none"> For any healthy SPS SIS Neglecting all perceived pseudorange rate errors attributable to pseudorange step changes caused by NAV message data cutovers Neglecting single-frequency ionospheric delay model errors 	✓

User Range Acceleration Error Accuracy	Conditions and Constraints	Evaluated in This Report
Single-Frequency C/A-Code: • $\leq 2 \text{ mm/sec}^2$ 95% Global average URAE over any 3-second interval during normal operations at Any AOD	<ul style="list-style-type: none"> For any healthy SPS SIS Neglecting all perceived pseudorange rate errors attributable to pseudorange step changes caused by NAV message data crossovers Neglecting single-frequency ionospheric delay model errors 	✓
Coordinated Universal Time Offset Error Accuracy		
• $\leq 40 \text{ nanoseconds}$ 95% Global average UTCOE during normal operations at Any AOD.	<ul style="list-style-type: none"> For any healthy SPS SIS 	✓
Instantaneous URE Integrity	Conditions and Constraints	
Single-Frequency C/A-Code: • $\leq 1 \times 10^{-5}$ Probability over any hour of the SPS SIS Instantaneous URE exceeding the NTE tolerance without a timely alert during normal operations.	<ul style="list-style-type: none"> For any healthy SPS SIS SPS SIS URE NTE tolerance defined to be ± 4.42 times the upper bound on the URA value corresponding to the URA index "N" currently broadcast by the satellite. Given that the maximum SPS SIS instantaneous URE did not exceed the NTE tolerance at the start of the hour Worst case for delayed alert is 6 hours. Neglecting single-frequency ionospheric delay model errors 	Please see results in the WAAS PAN report. ✓
Instantaneous UTCOE Integrity	Conditions and Constraints	
Single-Frequency C/A-Code: • $\leq 1 \times 10^{-5}$ Probability over any hour of the SPS SIS Instantaneous UTCOE exceeding the NTE tolerance without a timely alert during normal operations.	<ul style="list-style-type: none"> For any healthy SPS SIS SPS SIS URE NTE tolerance defined 	✓
Unscheduled Failure Interruption Continuity	Conditions and Constraints	
Unscheduled Failure Interruptions: • ≥ 0.9998 Probability over any hour of not losing the SPS SIS availability from a slot due to unscheduled interruption	<ul style="list-style-type: none"> Calculated as an average over all slots in the 24-slot constellation, normalized annually Given that the SPS SIS is available from the slot at the start of the hour 	✓

Status and Problem Reporting	Conditions and Constraints	Evaluated in This Report
Scheduled event affecting service <ul style="list-style-type: none"> • Appropriate NANU issued to the Coast Guard and the FAA at least 48 hours prior to the event 	<ul style="list-style-type: none"> • For any SPS SIS 	✓
Unscheduled outage or problem affecting service <ul style="list-style-type: none"> • Appropriate NANU issued to the Coast Guard and the FAA as soon as possible after the event 	<ul style="list-style-type: none"> • For any SPS SIS 	✓
Per-Slot Availability	Conditions and Constraints	
<ul style="list-style-type: none"> • ≥ 0.957 Probability that a slot in the baseline 24-slot configuration will be occupied by a satellite broadcasting a healthy SPS SIS • ≥ 0.957 Probability that a slot in the expanded configuration will be occupied by a pair of satellites each broadcasting a healthy SPS SIS 	<ul style="list-style-type: none"> • Calculated as an average over all slots in the 24-slot constellation, normalized annually • Applies to satellites broadcasting a healthy SPS SIS that also satisfy the other performance standards in the SPS performance standard. 	✓
Constellation Availability	Conditions and Constraints	
<ul style="list-style-type: none"> • ≥ 0.98 Probability that at least 21 slots out of the 24 will be occupied either by a satellite broadcasting a healthy SPS SIS in the baseline 24-slot configuration or by a pair of satellites each broadcasting a healthy SPS SIS in the expanded slot configuration • ≥ 0.99999 Probability that at least 20 slots out of the 24 will be occupied either by a satellite broadcasting a healthy SPS SIS in the baseline 24-slot configuration or by a pair of satellites each broadcasting a healthy SPS SIS in the expanded slot configuration 	<ul style="list-style-type: none"> • Calculated as an average over all slots in the 24-slot constellation, normalized annually. • Applies to satellites broadcasting a healthy SPS SIS that also satisfies the other performance standards in the SPS performance standard. 	✓
Operational Satellite Count	Conditions and Constraints	
<ul style="list-style-type: none"> • ≥ 0.95 Probability that the constellation will have at least 24 operational satellites regardless of whether those operational satellites are located in slots or not 	<ul style="list-style-type: none"> • Applies to the total number of operational satellites in the constellation (averaged over any day); where any satellite which appears in the transmitted navigation message almanac is defined to be an operational satellite regardless of whether that satellite is currently broadcasting a healthy SPS SIS or not and regardless of whether the broadcast SPS SIS also satisfies the other performance standards in the SPS performance standard or not. 	✓

PDOP Availability	Conditions and Constraints	Evaluated in This Report
<ul style="list-style-type: none"> • $\geq 98\%$ global PDOP of 6 or less • $\geq 88\%$ worst site PDOP of 6 or less 	<ul style="list-style-type: none"> Defined for a position/time solution meeting the representative user conditions and operating within the service volume over any 24-hour interval 	✓
Service Availability	Conditions and Constraints	
<ul style="list-style-type: none"> • $\geq 99\%$ Horizontal Service Availability, average location • $\geq 99\%$ Vertical Service Availability, average location 	<ul style="list-style-type: none"> 17m Horizontal (SIS only) 95% threshold 37m Vertical (SIS only) 95% threshold Defined for a position/time solution meeting the representative user conditions and operating within the service volume over any 24-hour interval. 	✓
<ul style="list-style-type: none"> • $\geq 90\%$ Horizontal Service Availability, worst-case location • $\geq 90\%$ Vertical Service Availability, worst-case location 	<ul style="list-style-type: none"> 17m Horizontal (SIS only) 95% threshold 37m Vertical (SIS only) 95% threshold Defined for a position/time solution meeting the representative user conditions and operating within the service volume over any 24-hour interval. 	✓
Position/Time Accuracy	Conditions and Constraints	
Global Average Position Domain Accuracy <ul style="list-style-type: none"> • $\leq 9\text{m}$ 95% Horizontal Error • $\leq 15\text{m}$ 95% Vertical Error 	<ul style="list-style-type: none"> Defined for a position/time solution meeting the representative user conditions Standard based on a measurement interval of 24 hours averaged over all points in the service volume. 	✓
Worst Site Position Domain Accuracy <ul style="list-style-type: none"> • $\leq 17\text{m}$ 95% Horizontal Error • $\leq 37\text{m}$ 95% Vertical Error 	<ul style="list-style-type: none"> Defined for a position/time solution meeting the representative user conditions Standard based on a measurement interval of 24 hours averaged over all points in the service volume. 	✓
Time Transfer Domain Accuracy <ul style="list-style-type: none"> • ≤ 40 nanoseconds time transfer error 95% of time (SIS only) 	<ul style="list-style-type: none"> Defined for a time transfer solution meeting the representative user conditions Standard based on a measurement interval of 24 hours averaged over all points in the service volume. 	✓

2 PDOP Availability Standard

PDOP Availability: The percentage of time over any 24-hour interval that the PDOP value is less than or equal to its threshold for any point within the service volume.

Dilution of Precision (DOP): The magnifying effect on GPS position error induced by mapping GPS range errors into position within the specified coordinate system through the geometry of the position solution. The DOP varies as a function of satellite positions relative to user position. The DOP may be represented in any user local coordinate desired. Examples are HDOP for local horizontal, VDOP for local vertical, PDOP for all three coordinates, and TDOP for time.

PDOP Availability Standard	Conditions and Constraints
$\geq 98\%$ global PDOP of 6 or less	<ul style="list-style-type: none"> Defined for a position/time solution meeting the representative user conditions and operating within the service volume over any 24-hour interval
$\geq 88\%$ worst site PDOP of 6 or less	

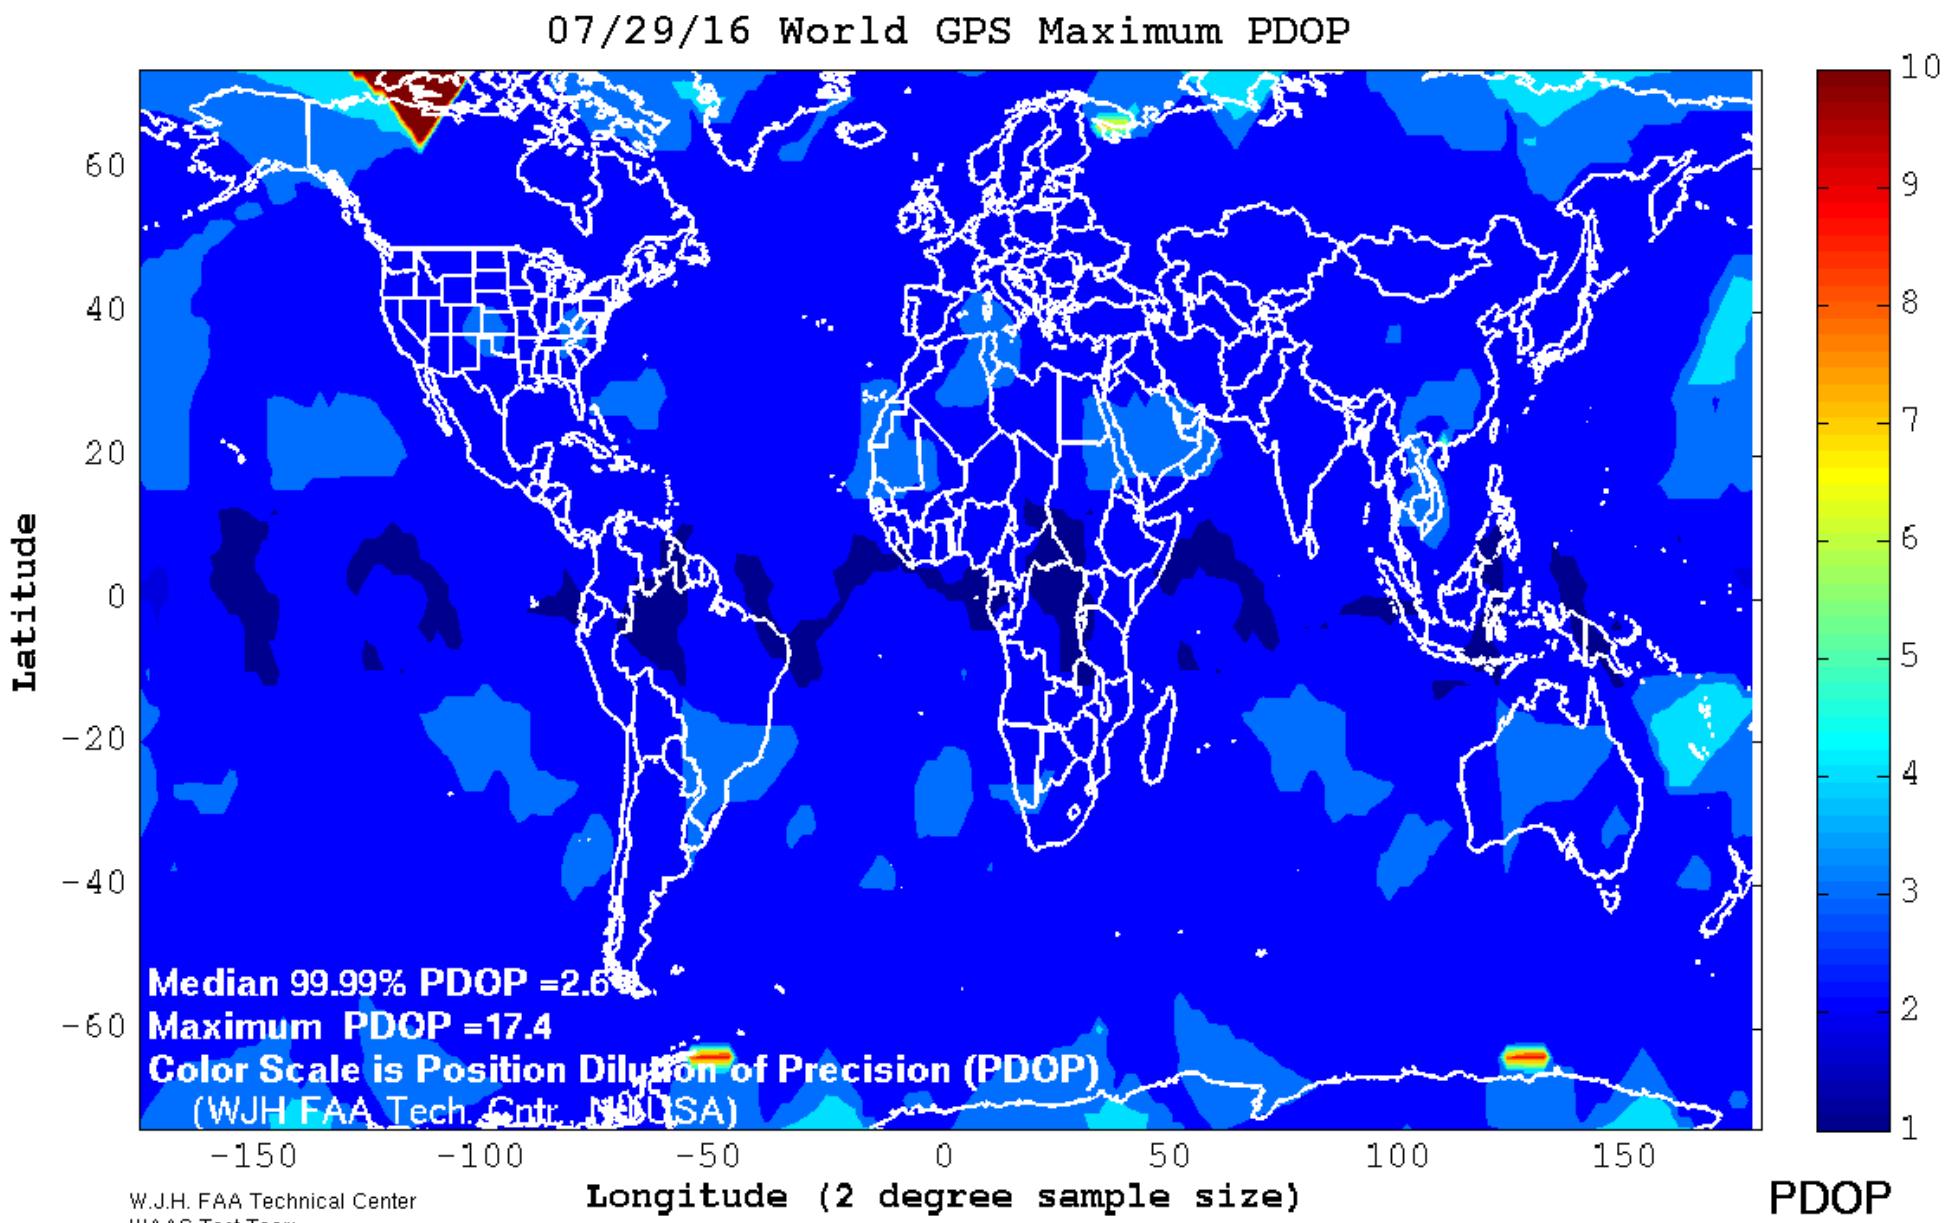
Almanacs for GPS weeks used for this coverage portion of the report were obtained from the Coast Guard web site (www.navcen.uscg.mil). Using these almanacs, an SPS coverage area program developed by the WAAS test team was used to calculate the PDOP at every 5° point between longitudes of 180W to 180E and 80S and 80N at one-minute intervals. This gives a total of 1440 samples for each of the 2376 grid points in the coverage area. Table 2-1 provides the global averages and worst-case availability over a 24-hour period for each week. Table 2-1 also gives the global 99.9% PDOP value for each of the thirteen GPS Weeks. The PDOP was 2.9388 or better 99.9% of the time for each of the 24-hour intervals.

Figure 2-1 is a contour plot of PDOP values over the entire globe. Inside each contour area, the PDOP value is greater than or equal to the contour value shown in the legend for that color line. That areas' value is also less than the next higher contour value, unless another contour line lies within the current area. A single "DOP hole" where the PDOP value is greater than 6 was evaluated for satellite visibility for one 24-hour interval from the week shaded in Table 2-1. The histogram in Figure 2-2 shows the satellite visibility at the DOP hole position for the 24 hour interval in question. The GPS coverage performance evaluated met the specifications stated in the SPS.

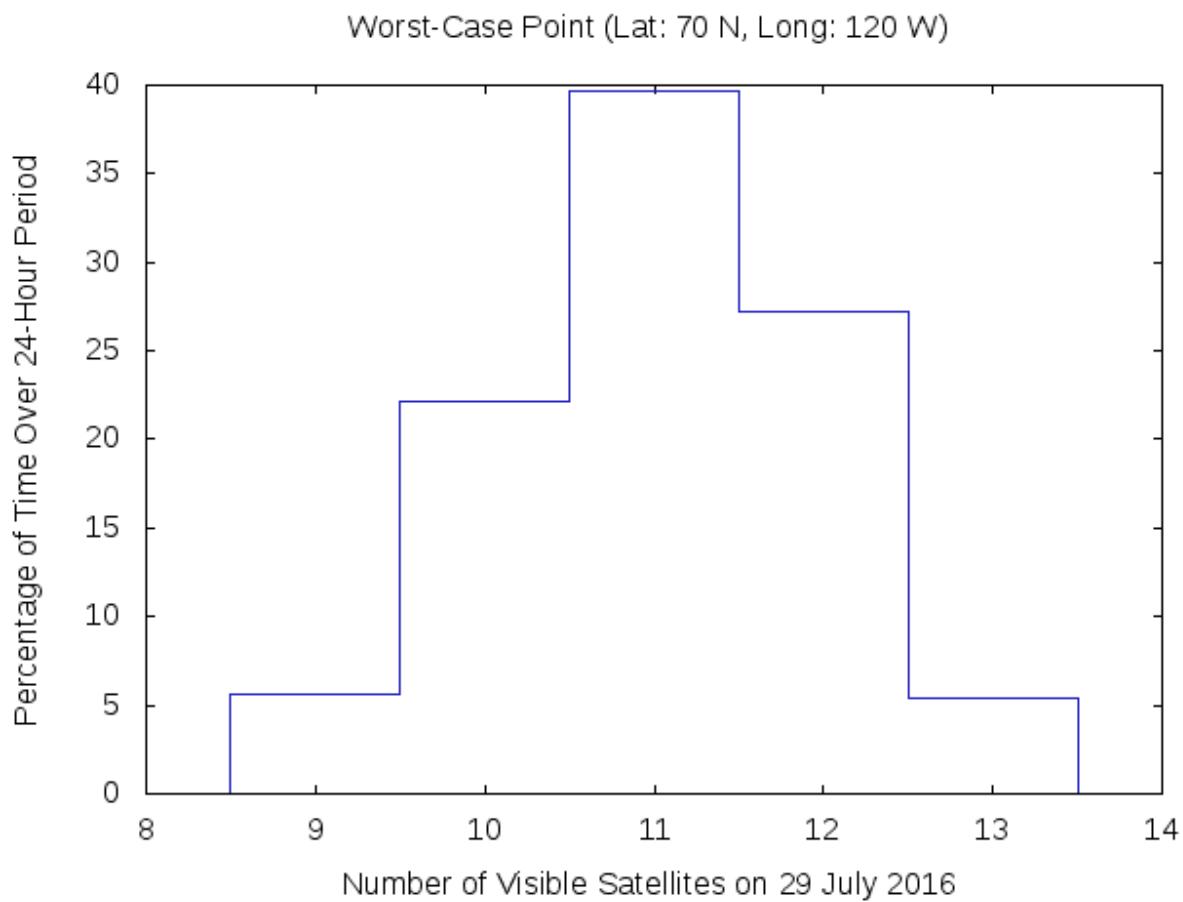
Table 2-1 PDOP Availability Statistics

Date Range of Week	Global 99.9% PDOP Value	Global Average Availability (Spec: $\geq 98\%$)	Worst-Case Point Availability (Spec: $\geq 88\%$)
26 Jun – 2 Jul	2.6952	99.999%	99.722
3 – 9 Jul	2.9388	99.999%	99.792
10 – 16 Jul	2.6908	99.999%	99.722
17 – 23 Jul	2.6953	99.999%	99.792
24 – 30 Jul	2.6963	99.999%	99.722
31 Jul – 6 Aug	2.7012	99.999%	99.653
7 – 13 Aug	2.7080	99.999%	99.653
14 – 20 Aug	2.7150	99.999%	99.583
21 – 27 Aug	2.7284	99.999%	99.583
28 Aug – 3 Sep	2.7444	99.999%	99.306
4 – 10 Sep	2.7564	99.999%	99.653
11 – 17 Sep	2.7723	99.999%	99.653
18 – 24 Sep	2.7744	99.999%	99.653
25 Sep – 1 Oct	2.7761	99.999%	99.722

Figure 2-1 World GPS Maximum PDOP



W.J.H. FAA Technical Center
WAAS Test Team

Figure 2-2 Satellite Visibility Profile for Worst-Case Point

3 NANU Summary and Evaluation

NANU: Advisory to NAVSTAR Users – A periodic bulletin alerting users to changes in the satellite system performance.

Status and Problem Reporting	Conditions and Constraints
Scheduled event affecting service <ul style="list-style-type: none"> • Appropriate NANU issued to the Coast Guard and the FAA at least 48 hours prior to the event 	<ul style="list-style-type: none"> • For any SPS SIS
Unscheduled outage or problem affecting service <ul style="list-style-type: none"> • Appropriate NANU issued to the Coast Guard and the FAA as soon as possible after the event 	<ul style="list-style-type: none"> • For any SPS SIS

3.1 Satellite Outages from NANU Reports

Satellite availability performance was analyzed based on published “Notice: Advisory to Navstar Users” messages (NANU’s). During this reporting period, 1 July through 30 September 2016, there were a total of fourteen reported outages. Twelve outages were maintenance activities and were reported in advance, while two were unscheduled outages. A complete listing of outage NANU’s for the reporting period is provided in Table 3-1. A complete listing of the forecasted outage NANU’s for the reporting period can be found in Table 3-2. Canceled outage NANU’s (if any) are provided in Table 3-3. The minimum duration a scheduled outage was forecasted ahead of time was 104.55 hours. The maximum response time following an unscheduled outage was 0.733 hours. Therefore the probability of continuity not being affected due to an unscheduled failure interruption was 100%, which met the specification requirement.

Table 3-1 NANUs Affecting Satellite Availability

NANU#	PRN	TYPE	Start Date	Start Time	End Date	End Time	Total Unscheduled	Total Scheduled	Total
2016039	3	UNUSABLE	3-Jul-16	19:27	4-Jul-16	3:26	7.98		7.98
2016040	29	FCSTSUMM	8-Jul-16	0:11	8-Jul-16	6:10		5.98	5.98
2016042	16	FCSTSUMM	15-Jul-16	0:31	15-Jul-16	4:20		3.82	3.82
2016045	16	FCSTSUMM	19-Jul-16	23:59	20-Jul-16	5:37		5.63	5.63
2016048	26	FCSTSUMM	22-Jul-16	8:42	22-Jul-16	13:24		4.7	4.7
2016049	24	FCSTSUMM	26-Jul-16	15:33	26-Jul-16	21:09		5.6	5.6
2016050	9	FCSTSUMM	29-Jul-16	7:55	29-Jul-16	12:53		4.97	4.97
2016053	30	FCSTSUMM	16-Aug-16	11:33	16-Aug-16	17:27		5.9	5.9
2016054	31	FCSTSUMM	18-Aug-16	21:12	19-Aug-16	3:40		6.47	6.47
2016056	8	UNUSABLE	26-Aug-16	2:11	26-Aug-16	9:24	7.22		7.22
2016059	1	FCSTSUMM	2-Sep-16	3:05	2-Sep-16	7:58		4.88	4.88
2016060	20	FCSTSUMM	8-Sep-16	20:41	9-Sep-16	2:31		5.83	5.83
2016063	14	FCSTSUMM	15-Sep-16	18:44	16-Sep-16	1:11		6.45	6.45
2016065	21	FCSTSUMM	22-Sep-16	18:41	22-Sep-16	23:55		5.23	5.23
Totals of Unscheduled, Scheduled & Total Downtime							15.20	65.46	80.66

GENERAL NANUs

Table 3-2 NANUs Forecasted to Affect Satellite Availability

NANU #	PRN	Type	Start Date	Start Time	End Date	End Time	Total	Comments
2016036	29	FCSTDV	7-Jul	23:25	8-Jul	11:25	12	2016040
2016037	3	UNUSUFN	3-Jul	19:15				
2016038	3	UNUSUFN	3-Jul	19:51				2016039
2016041	16	FCSTDV	14-Jul	23:50	15-Jul	11:50	12	2016042
2016043	26	FCSTDV	22-Jul	8:20	22-Jul	20:20	12	2016048
2016044	16	FCSTDV	19-Jul	23:45	20-Jul	11:45	12	2016045
2016046	24	FCSTDV	26-Jul	15:20	27-Jul	3:20	12	2016049
2016047	9	FCSTDV	29-Jul	7:30	29-Jul	19:30	12	2016050
2016051	30	FCSTDV	16-Aug	11:00	16-Aug	23:00	12	2016053
2016052	31	FCSTDV	18-Aug	20:45	19-Aug	8:45	12	2016054
2016055	8	UNUSUFN	26-Aug	2:11				2016056
2016057	1	FCSTDV	2-Sep	2:50	2-Sep	14:50	12	2016059
2016058	20	FCSTDV	8-Sep	20:30	9-Sep	8:30	12	2016060
2016061	14	FCSTDV	15-Sep	18:25	16-Sep	18:25	24	2016063
2016064	21	FCSTDV	22-Sep	18:15	23-Sep	6:15	12	2016065
Total Forecasted Downtime								

Table 3-3 Cancelled NANUs

NANU#	PRN	Type	Start Date	Start Time	Comments
None	-	-	-	-	-

Satellite Reliability, Maintainability, and Availability (RMA) data is being collected based on published “Notice: Advisory to Navstar Users” messages (NANU’s). This data has been summarized in Table 3-4. The “Total Satellite Observed MTTR” was calculated by taking the average downtime of all satellite outage occurrences. Scheduled downtime was forecasted in advance via NANU’s. All other downtime reported via NANU was considered unscheduled. The “Percent Operational” was calculated based on the ratio of total actual operating hours to total available operating hours for every satellite.

Table 3-4 GPS Satellite Maintenance Statistics

Satellite Reliability/Maintainability/Availability (RMA) Parameter	1-Jul-16 30-Sep-16	1-Jan-00 30-Sep-16
Total Forecast Downtime (hrs):	156	11366.82
Total Actual Downtime (hrs):	80.66	38840.22
Total Actual Scheduled Downtime (hrs):	65.46	6409.54
Total Actual Unscheduled Downtime (hrs):	15.20	32430.68
Total Satellite Observed MTTR (hrs):	5.76	44.85
Scheduled Satellite Observed MTTR (hrs):	5.45	9.30
Unscheduled Satellite Observed MTTR (hrs):	7.60	183.22
# Total Satellite Outages:	14	866
# Scheduled Satellite Outages:	12	689
# Unscheduled Satellite Outages:	2	177
Percent Operational -- Scheduled Downtime:	99.90	99.86
Percent Operational -- All Downtime:	99.88	99.15

3.2 Service Availability Standard

Service Availability: The percentage of time over any 24-hour interval that the predicted 95% position error is less than the threshold at any given point within the service volume.

- **Horizontal Service Availability:** The percentage of time over any 24-hour interval that the predicted 95% horizontal error is less than its threshold for any point within the service volume.
- **Vertical Service Availability:** The percentage of time over any 24-hour interval that the predicted 95% vertical error is less than its threshold for any point within the service volume.

Service Availability Standard	Conditions and Constraints
<ul style="list-style-type: none"> • $\geq 99\%$ Horizontal Service Availability, average location • $\geq 99\%$ Vertical Service Availability, average location 	<ul style="list-style-type: none"> • 17m Horizontal (SIS only) 95% threshold • 37m Vertical (SIS only) 95% threshold • Defined for a position/time solution meeting the representative user conditions and operating within the service volume over any 24-hour interval.
<ul style="list-style-type: none"> • $\geq 90\%$ Horizontal Service Availability, worst-case location • $\geq 90\%$ Vertical Service Availability, worst-case location 	<ul style="list-style-type: none"> • 17m Horizontal (SIS only) 95% threshold • 37m Vertical (SIS only) 95% threshold • Defined for a position/time solution meeting the representative user conditions and operating within the service volume over any 24-hour interval.

To verify availability, the data collected from receivers at the twenty-eight WAAS sites was reduced to calculate 24-hour accuracy information and reported in Table 3-5. The data was collected at one-second intervals between 1 July and 30 September 2016.

Table 3-5 Accuracies Exceeding Threshold Statistics

Site	Total Number of Seconds of SPS Monitoring	Instances of 24-hour Threshold Failures	Quarters Service Availability %
Albuquerque	7946626	0	100%
Anchorage	7946388	0	100%
Atlanta	7948397	0	100%
Barrow	7242153	0	100%
Bethel	7933316	0	100%
Billings	7947079	0	100%
Boston	7948452	0	100%
Cleveland	7948494	0	100%
Cold Bay	7946189	0	100%
Fairbanks	6922834	0	100%
Gander	7946889	0	100%
Honolulu	7948527	0	100%
Houston	7948542	0	100%
Iqaluit	7328107	0	100%
Juneau	7947955	0	100%
Kansas City	7948541	0	100%
Kotzebue	7946126	0	100%
Los Angeles	7948537	0	100%
Merida	7934442	0	100%
Miami	7948351	0	100%
Minneapolis	7948469	0	100%
Oakland	7948537	0	100%
Salt Lake City	7948531	0	100%
San Jose Del Cabo	7889500	0	100%
San Juan	7932402	0	100%
Seattle	7943848	0	100%
Tapachula	7893267	0	100%
Washington, DC	7778337	0	100%
Global Average over Reporting Period = 100% (SPS Spec. > 95.87%)			

4 Service Reliability Standard

Service Reliability: The percentage of time over a specific time interval that the instantaneous SIS SPS URE is maintained within a specified reliability threshold at any given point within the service volume, for all healthy GPS satellites.

User Range Error Accuracy	Conditions and Constraints
<p>Single Frequency C/A-Code</p> <ul style="list-style-type: none"> • $\leq 30\text{m}$ 99.94% Global Average URE during normal operations • $\leq 30\text{m}$ 99.79% Worst Case single point average during normal operations. 	<ul style="list-style-type: none"> • For any healthy SPS SIS. • Neglecting single-frequency ionospheric delay model errors • Including group delay time correction (T_{GD}) errors at L1 • Including inter-signal bias (P(Y)-code to C/A-code) errors at L1 • Standard based on measurement interval of one year; average of daily values within service volume • Standard based on 3 service failures per year, lasting no more than 6 hours each

Table 4-1 shows a comparison to the service reliability standard for range data collected at a set of six receivers across North America. Although the specification calls for yearly evaluations, we will be evaluating this SPS requirement at quarterly intervals. Additional range analysis results can be found in table 5-2. The maximum User Range Error recorded this quarter was 16.896 meters on satellite PRN 15.

Table 4-1 User Range Error Accuracy

Date Range of Data Collection	Site	Number of Samples This Quarter	Number of Samples where SPS URE $> 30\text{m}$ NTE	Percentage
1 Jul – 30 Sep 2016	Boston	68,722,370	0	100%
1 Jul – 30 Sep 2016	Honolulu	71,534,292	0	100%
1 Jul – 30 Sep 2016	Los Angeles	69,416,644	0	100%
1 Jul – 30 Sep 2016	Miami	69,742,832	0	100%
1 Jul – 30 Sep 2016	Merida	71,207,222	0	100%
1 Jul – 30 Sep 2016	Juneau	71,217,958	0	100%
Global		421,841,318	0	100%

5 Accuracy Standard

Positioning Accuracy: The statistical difference, at a 95% probability, between position measurements and a surveyed benchmark for any point within the service volume over any 24-hour interval.

- **Horizontal Positioning Accuracy:** The statistical difference, at a 95% probability, between horizontal position measurements and a surveyed benchmark for any point within the service volume over any 24-hour interval.
- **Vertical Positioning Accuracy:** The statistical difference, at a 95% probability, between vertical position measurements and a surveyed benchmark for any point within the service volume over any 24-hour interval.

Position/Time Accuracy	Conditions and Constraints
Global Average Position Domain Accuracy • $\leq 9\text{m}$ 95% Horizontal Error • $\leq 15\text{m}$ 95% Vertical Error	<ul style="list-style-type: none"> Defined for a position/time solution meeting the representative user conditions Standard based on a measurement interval of 24 hours averaged over all points in the service volume.
Worst Site Position Domain Accuracy • $\leq 17\text{m}$ 95% Horizontal Error • $\leq 37\text{m}$ 95% Vertical Error	<ul style="list-style-type: none"> Defined for a position/time solution meeting the representative user conditions Standard based on a measurement interval of 24 hours averaged over all points in the service volume.
Time Transfer Domain Accuracy • ≤ 40 nanoseconds time transfer error 95% of time (SIS only)	<ul style="list-style-type: none"> Defined for a time transfer solution meeting the representative user conditions Standard based on a measurement interval of 24 hours averaged over all points in the service volume.

User Range Accuracy	Conditions and Constraints
Single Frequency C/A-Code • $\leq 7.8\text{m}$ 95% Global Average URE during normal operations over All AODs • $\leq 6.0\text{m}$ 95% Global Average URE during operations at Zero AOD • $\leq 12.8\text{m}$ 95% Global Average URE during normal operations at Any AOD	<ul style="list-style-type: none"> For any healthy SPS SIS Neglecting single-frequency ionospheric delay model errors Including group delay time correction (T_{GD}) errors at L1 Including inter-signal bias (P(Y)-code to C/A-code) errors at L1
Single-Frequency C/A-Code: • $\leq 6 \text{ mm/sec}$ 95% Global Average URRE over any 3-second interval during normal operations at Any AOD	<ul style="list-style-type: none"> For any healthy SPS SIS Neglecting all perceived pseudorange rate errors attributable to pseudorange step changes caused by NAV message data cutovers Neglecting single-frequency ionospheric delay model errors
Single-Frequency C/A-Code: • $\leq 2 \text{ mm/sec}^2$ 95% Global average URAE over any 3-second interval during normal operations at Any AOD	<ul style="list-style-type: none"> For any healthy SPS SIS Neglecting all perceived pseudorange rate errors attributable to pseudorange step changes caused by NAV message data cutovers Neglecting single-frequency ionospheric delay model errors
Coordinated Universal Time Offset Error Accuracy	Conditions and Constraints
• ≤ 40 nanoseconds 95% Global average UTCOE during normal operations at Any AOD.	<ul style="list-style-type: none"> For any healthy SPS SIS

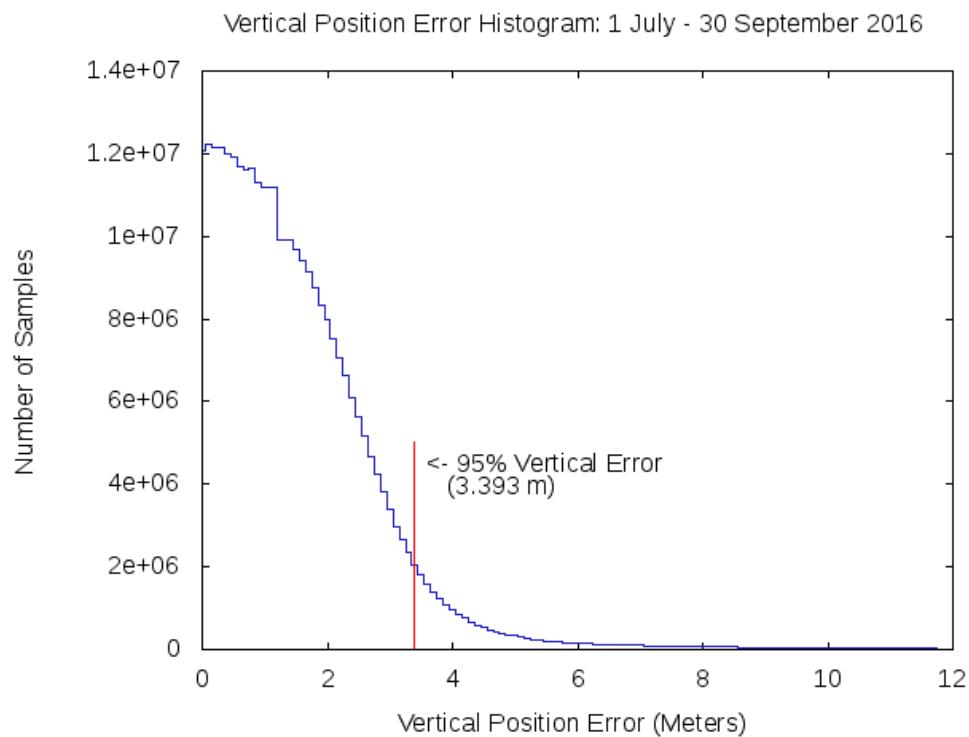
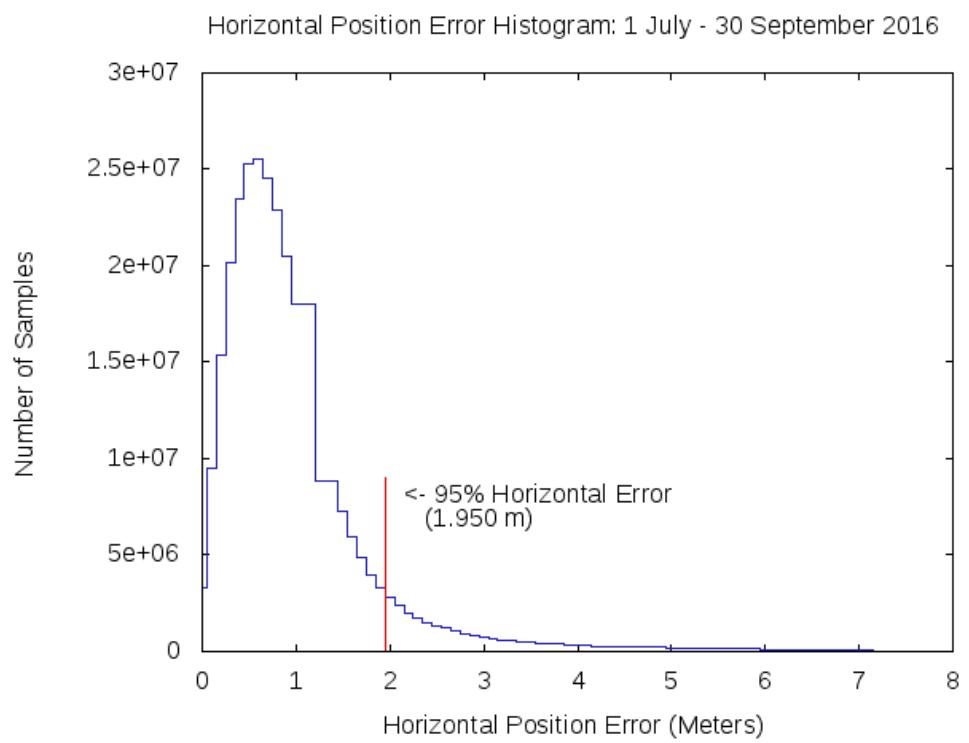
5.1 Position Accuracy

The data used for this section was collected for every second from 1 July through 30 September 2016 at the selected WAAS locations. Table 5-1 provides the 95% and 99.99% horizontal and vertical error accuracies for the quarter. Every twenty-four hour analysis period this quarter passed both the worst-case and global average position accuracy requirements set forth by the SPS specification.

Table 5-1 Horizontal & Vertical Accuracy Statistics for the Quarter

Site	95% Vertical (Meters)	95% Horizontal (Meters)	99.99% Vertical (Meters)	99.99% Horizontal (Meters)
Albuquerque	3.114	1.584	8.330	4.988
Anchorage	3.310	1.749	6.195	3.515
Atlanta	3.199	1.666	6.959	3.672
Barrow	3.615	1.472	7.549	3.002
Bethel	3.413	1.677	6.528	3.282
Billings	3.130	1.573	6.188	3.392
Boston	3.126	1.775	6.573	3.608
Cleveland	3.314	1.718	7.526	4.126
Cold Bay	3.388	1.558	6.736	3.600
Fairbanks	3.355	1.728	6.148	3.191
Gander	2.899	1.804	6.070	4.071
Honolulu	3.642	3.889	7.980	7.620
Houston	3.312	1.851	6.454	6.178
Iqaluit	3.316	1.410	7.339	2.981
Juneau	3.025	1.678	6.012	3.308
Kansas City	3.218	1.624	6.487	3.098
Kotzebue	3.503	1.774	6.696	3.337
Los Angeles	3.658	1.766	6.064	4.420
Merida	3.871	2.978	11.599	9.303
Miami	3.427	2.279	9.001	5.744
Minneapolis	3.137	1.616	6.040	3.439
Oakland	3.890	1.773	6.629	3.919
Salt Lake City	3.254	1.634	6.004	3.209
San Jose Del Cabo	3.488	2.759	9.784	5.577
San Juan	3.647	2.464	11.108	5.389
Seattle	3.353	1.616	6.081	2.991
Tapachula	4.196	3.354	9.955	7.757
Washington, DC	3.215	1.717	7.450	3.619

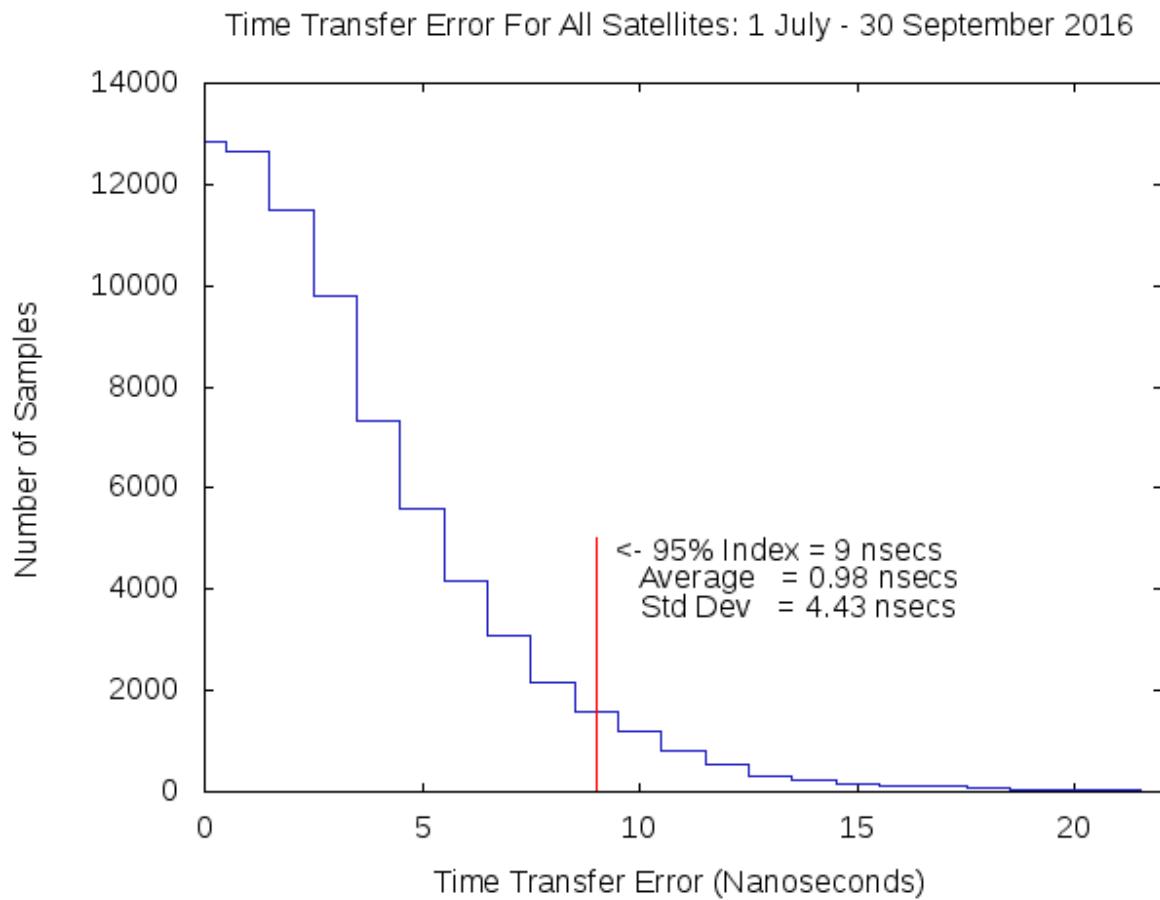
Figures 5-1 and 5-2 are the combined histograms of the vertical and horizontal errors for all twenty-eight WAAS sites from 1 July to 30 September 2016.

Figure 5-1 Global Vertical Error Histogram**Figure 5-2 Global Horizontal Error Histogram**

5.2 Time Transfer Accuracy

The GPS time error data between 1 July and 30 September 2016 was downloaded from USNO Internet site. The USNO data file contains the time difference between the USNO master clock and GPS system time for each GPS satellites during the time period. Over 10,000 samples of GPS time error are contained in the USNO data file. In order to evaluate the GPS time transfer error, the data file was used to create a histogram (Fig 5-3) to represent the distribution of GPS time error. The histogram was created by taking the absolute value of time difference between the USNO master clock and GPS system time, then creating data bins with one nanosecond precision. The number of samples in each bin was then plotted to form the histogram in Fig 5-3. The maximum instantaneous UTC offset error (UTCOE) for the quarter was 29.5 nanoseconds. The mean, standard deviation and 95% index of Time Transfer Error, and the maximum UTCOE are all within the requirements of GPS SPS time error.

Figure 5-3 Time Transfer Error



5.3 Range Domain Accuracy

Tables 5-3 through 5-5 provide the statistical data for the range error, range rate error and the range acceleration error for each satellite. This data was collected between 1 July and 30 September 2016. A weighted average filter was used for the calculation of the range rate error and the range acceleration error. All Range Domain SPS specifications were met.

Table 5-2 Range Error Statistics

PRN	RMS Range Error (≤ 6 m) (Meters)	Range Error Mean (Meters)	1σ Range Error (Meters)	95% Range Error (Meters)	Max Range Error (SPS Spec. ≤ 30 m) (Meters)	Samples
1	1.303	-0.085	1.100	2.395	12.905	13870174
2	1.492	0.490	1.066	2.681	10.576	14740685
3	1.214	-0.002	1.056	2.324	12.565	14354638
5	1.459	-0.242	1.220	2.666	12.370	13815230
6	1.451	-0.579	1.115	2.761	15.305	13883604
7	1.190	0.329	0.899	2.306	14.515	12819959
8	1.531	0.358	1.228	2.771	16.673	12690374
9	1.271	0.589	0.954	2.368	16.011	13340564
10	1.251	0.000	1.002	2.273	11.398	13155694
11	1.523	0.603	1.154	2.693	14.078	12553062
12	1.353	0.138	1.147	2.568	15.039	14202788
13	1.291	0.163	1.071	2.395	10.684	13371569
14	1.641	1.122	0.965	2.751	10.148	13928293
15	1.365	0.289	1.158	2.567	16.896	12918472
16	1.789	1.183	1.123	3.048	13.296	13338144
17	1.361	-0.081	1.081	2.527	11.035	14601486
18	1.603	0.802	1.139	2.796	10.719	13781536
19	1.635	0.853	1.131	2.890	9.761	14025531
20	1.624	0.880	1.145	2.863	11.860	14348149
21	1.676	0.857	1.186	2.919	7.433	13100946
22	2.006	1.513	1.132	3.283	12.611	13661972
23	1.461	0.907	0.949	2.613	14.490	12923811
24	1.463	-0.061	1.194	2.701	11.410	14149285
25	1.266	0.266	1.090	2.497	13.971	14469267
26	1.387	0.817	0.968	2.481	12.514	12699527
27	1.322	0.418	1.067	2.441	15.564	13337452
28	1.731	0.653	1.155	3.111	12.880	13693078
29	1.452	0.027	1.174	2.634	10.095	13132673
30	1.232	0.451	0.918	2.324	16.153	12679309
31	1.336	0.626	0.989	2.355	11.613	13847457
32	1.175	0.008	0.986	2.212	10.132	14406589

Table 5-3 Range Rate Error Statistics

PRN	Range Rate Error RMS (mm/s)	95% Range Rate Error (mm/s)	Max Range Rate Error (mm/s)	Samples
1	1.459	2.574	168.350	13870174
2	1.680	2.908	110.590	14740685
3	1.480	2.593	112.640	14354638
5	1.755	3.087	110.750	13815230
6	1.548	2.684	110.740	13883604
7	1.451	2.711	91.570	12819959
8	1.647	2.808	123.970	12690374
9	1.419	2.572	108.770	13340564
10	1.387	2.527	121.480	13155694
11	1.726	2.821	184.020	12553062
12	1.754	3.067	140.440	14202788
13	1.601	2.826	113.720	13371569
14	1.450	2.707	121.570	13928293
15	1.568	2.851	110.450	12918472
16	1.587	2.860	142.010	13338144
17	1.721	2.996	127.810	14601486
18	1.644	2.903	91.710	13781536
19	1.648	2.924	84.850	14025531
20	1.647	2.920	90.340	14348149
21	1.726	3.034	125.870	13100946
22	1.564	2.808	99.080	13661972
23	1.422	2.663	100.980	12923811
24	1.951	3.053	144.410	14149285
25	1.568	2.678	93.420	14469267
26	1.422	2.510	146.150	12699527
27	1.427	2.570	136.370	13337452
28	1.821	2.836	140.870	13693078
29	1.677	2.883	144.070	13132673
30	1.372	2.544	83.840	12679309
31	1.514	2.707	131.280	13847457
32	1.360	2.507	144.630	14406589

Table 5-4 Range Acceleration Error Statistics

PRN	Range Acceleration Error RMS ($\mu\text{m}/\text{s}^2$)	95% Range Acceleration Error ($\mu\text{m}/\text{s}^2$)	Max Range Acceleration Error ($\mu\text{m}/\text{s}^2$)	Samples
1	11.071	20.233	1480	13870174
2	13.064	21.731	970	14740685
3	11.770	20.158	1130	14354638
5	13.506	25.011	970	13815230
6	12.083	20.158	960	13883604
7	10.593	20.862	910	12819959
8	12.538	20.937	1230	12690374
9	11.141	20.161	1130	13340564
10	10.870	20.232	1210	13155694
11	13.543	21.549	1840	12553062
12	13.717	25.251	1400	14202788
13	12.454	21.988	1130	13371569
14	10.608	20.546	1210	13928293
15	11.529	21.177	1100	12918472
16	11.854	23.207	1420	13338144
17	13.116	23.257	1280	14601486
18	12.457	23.357	920	13781536
19	12.542	22.097	840	14025531
20	12.430	22.212	910	14348149
21	13.148	25.050	1250	13100946
22	11.787	22.121	1000	13661972
23	10.763	21.226	1000	12923811
24	15.886	25.789	1440	14149285
25	12.248	20.230	930	14469267
26	11.298	20.165	1470	12699527
27	11.113	20.316	1360	13337452
28	14.557	22.203	1400	13693078
29	12.819	22.724	1450	13132673
30	10.666	20.108	840	12679309
31	11.343	20.814	1170	13847457
32	10.536	20.107	1450	14406589

Figures 5-4, 5-5 and 5-6 are graphical representations of the distributions of the maximum range error, range rate error and range acceleration error for all satellites. The highest maximum range error occurred on satellite 15 with an error of 16.896 meters. Satellite 21 had the lowest maximum range error of 7.433 meters. Figure 5-7 is histogram of satellite range error for all satellites over the entire quarter. Figures 5-8, 5-9, and 5-10 show the individual maximums per satellite for range error, range rate error, and range acceleration error respectively.

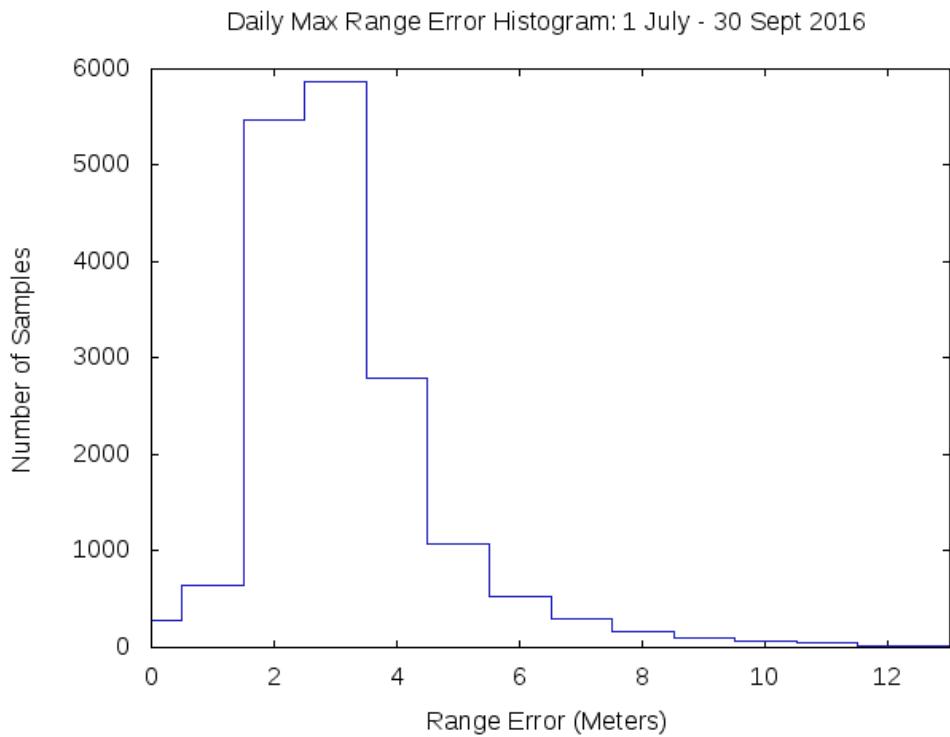
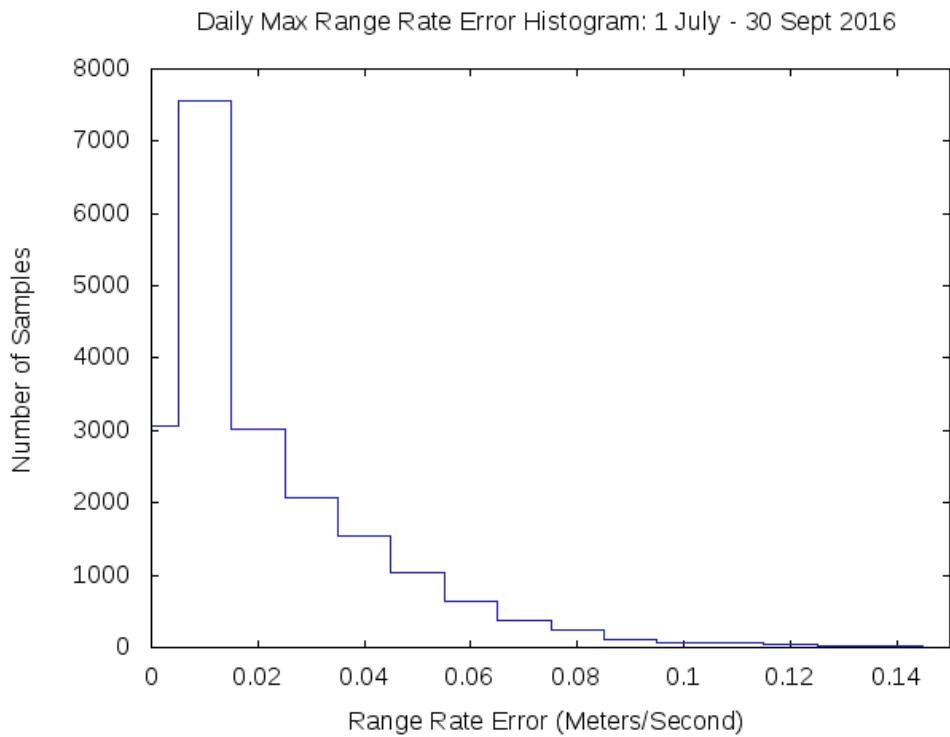
Figure 5-4 Distribution of Daily Max Range Errors**Figure 5-5 Distribution of Daily Max Range Rate Errors**

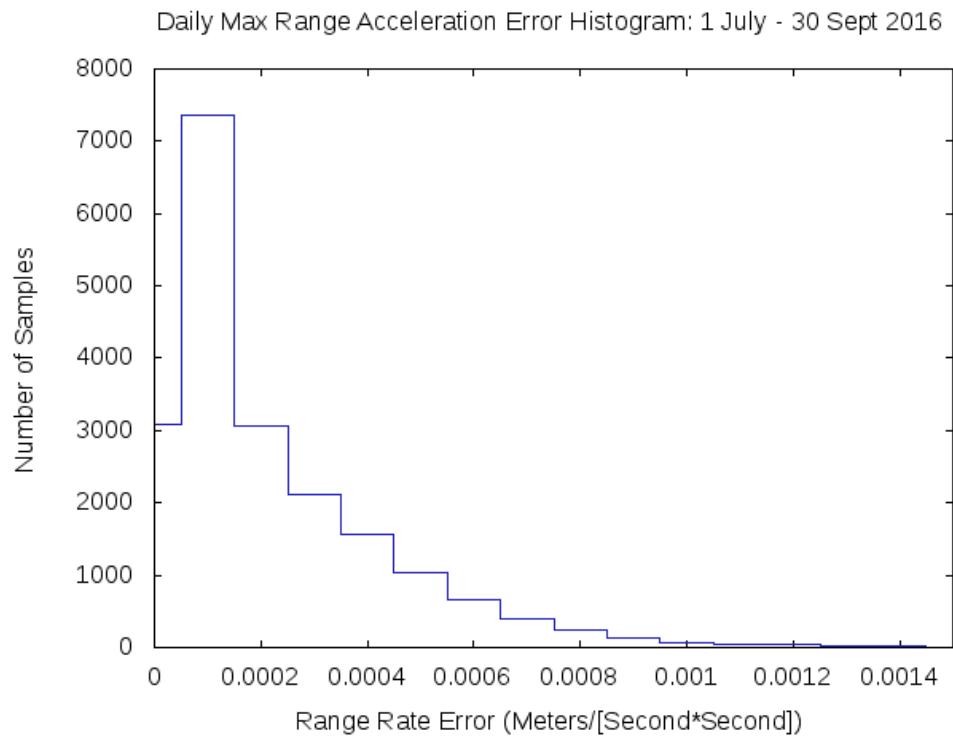
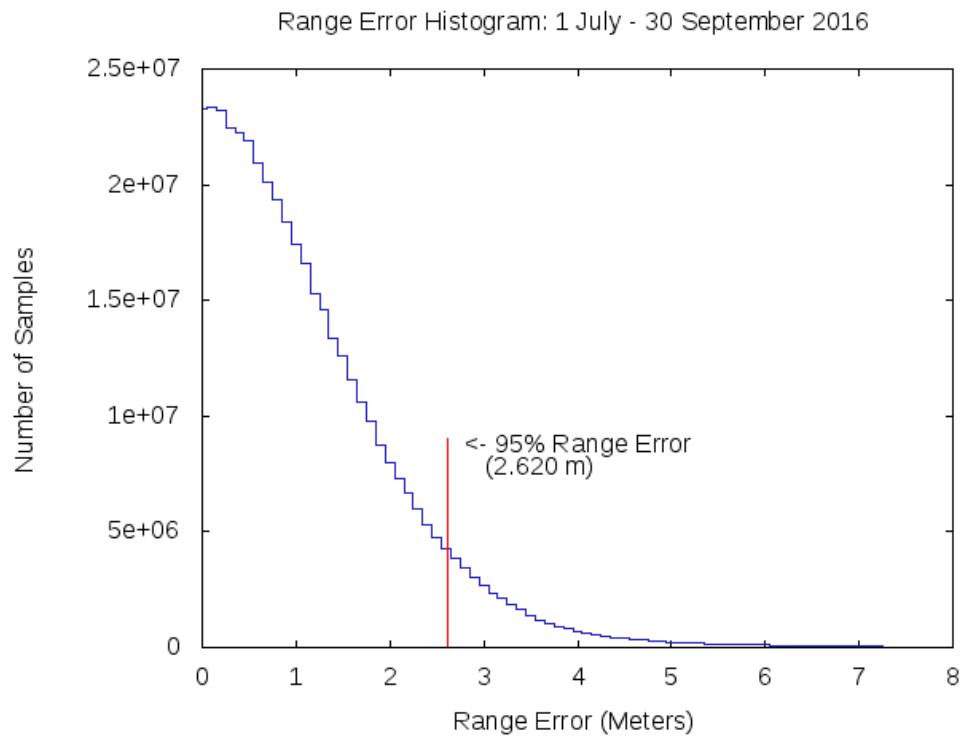
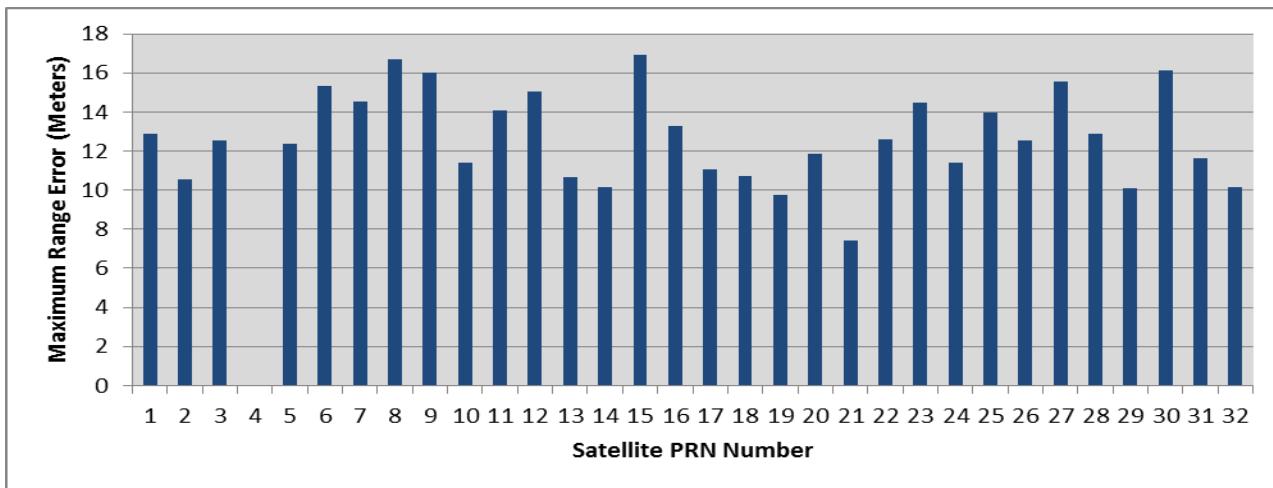
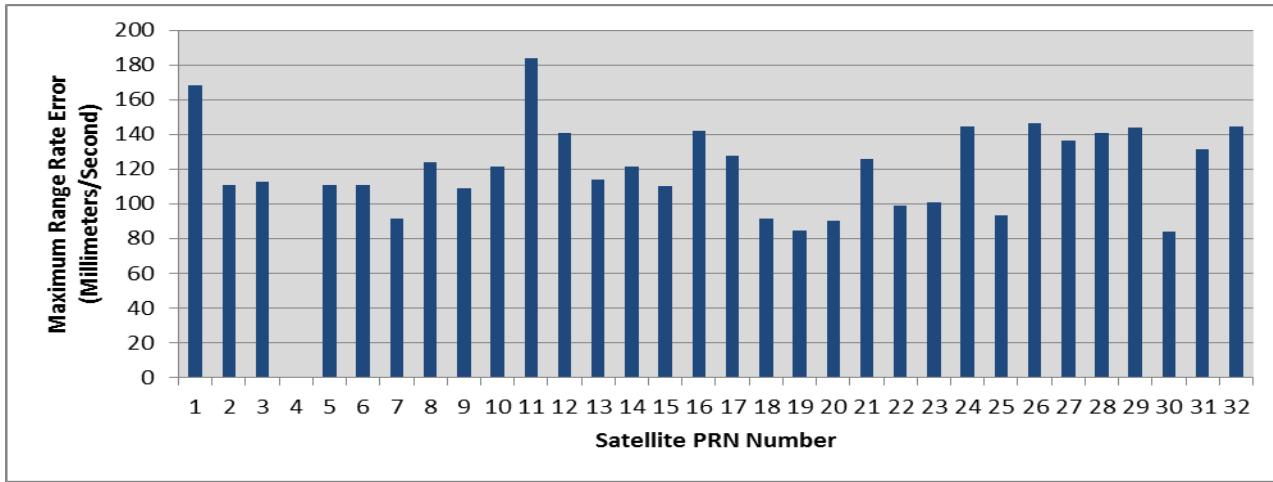
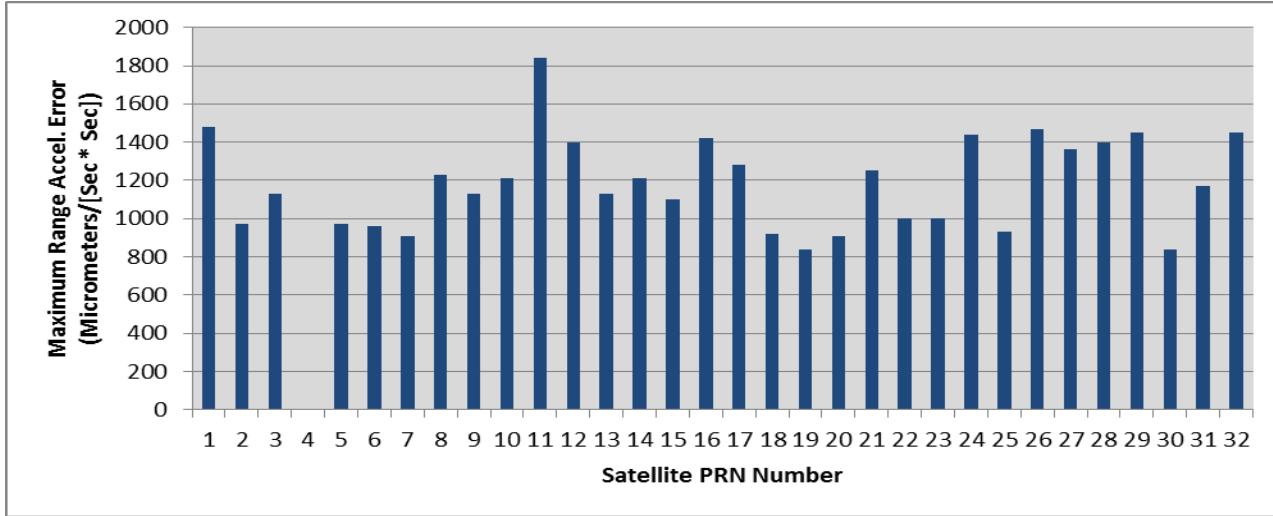
Figure 5-6 Distribution of Daily max Range Acceleration Errors**Figure 5-7 Range Error Histogram**

Figure 5-8 Maximum Range Error Per Satellite**Figure 5-9 Maximum Range Rate Error Per Satellite****Figure 5-10 Maximum Range Acceleration Error Per Satellite**

6 Solar Storms

Solar storm activity is being monitored in order to assess the possible impact on GPS SPS performance. Solar activity is reported by the Space Weather Prediction Center (SWPC), a division of the National Oceanic and Atmospheric Administration (NOAA). When storm activity is indicated, ionospheric delays of the GPS signal, satellite outages, position accuracy and availability will be analyzed.

The following article was taken from the SEC web site <http://swpc.noaa.gov>. It briefly explains some of the ideas behind the association of the aurora with geomagnetic activity and a bit about how the ‘K-index’ or ‘K-factor’ works.

The aurora is caused by the interaction of high-energy particles (usually electrons) with neutral atoms in the earth's upper atmosphere. These high-energy particles can ‘excite’ (by collisions) valence electrons that are bound to the neutral atom. The ‘excited’ electron can then ‘de-excite’ and return back to its initial, lower energy state, but in the process it releases a photon (a light particle). The combined effect of many photons being released from many atoms results in the aurora display that you see.

The details of how high energy particles are generated during geomagnetic storms constitute an entire discipline of space science in its own right. The basic idea, however, is that the Earth’s magnetic field (let us say the ‘geomagnetic field’) is responding to an outwardly propagating disturbance from the Sun. As the geomagnetic field adjusts to this disturbance, various components of the Earth’s field change form, releasing magnetic energy and thereby accelerating charged particles to high energies. These particles, being charged, are forced to stream along the geomagnetic field lines. Some end up in the upper part of the earth’s neutral atmosphere and the auroral mechanism begins.

An instrument called a magnetometer may also measure the disturbance of the geomagnetic field. At NOAA’s operations center magnetometer data is received from dozens of observatories in one-minute intervals. The data is received at or near to ‘real-time’ and allows NOAA to keep track of the current state of the geomagnetic conditions. In order to reduce the amount of data NOAA converts the magnetometer data into three-hourly indices, which give a quantitative, but less detailed measure of the level of geomagnetic activity. The K-index scale has a range from 0 to 9 and is directly related to the maximum amount of fluctuation (relative to a quiet day) in the geomagnetic field over a three-hour interval.

The K-index is therefore updated every three hours. The K-index is also necessarily tied to a specific geomagnetic observatory. For locations where there are no observatories, one can only estimate what the local K-index would be by looking at data from the nearest observatory, but this would be subject to some errors from time to time because geomagnetic activity is not always spatially homogenous.

Another item of interest is that the location of the aurora usually changes geomagnetic latitude as the intensity of the geomagnetic storm changes. The location of the aurora often takes on an ‘oval-like’ shape and is appropriately called the auroral oval.

Figures 6-1 through 6-3 show the K-index for three time periods with significant solar activity. Although there were other days with increased solar activity, these time periods were selected as examples. (See Appendix B for the actual geomagnetic data for this reporting period.)

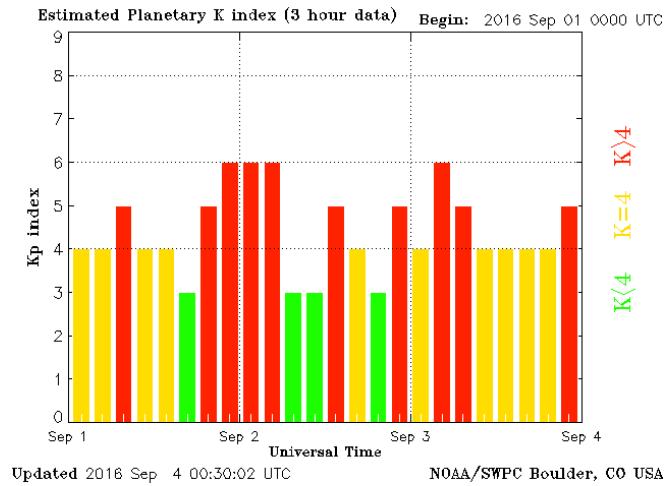
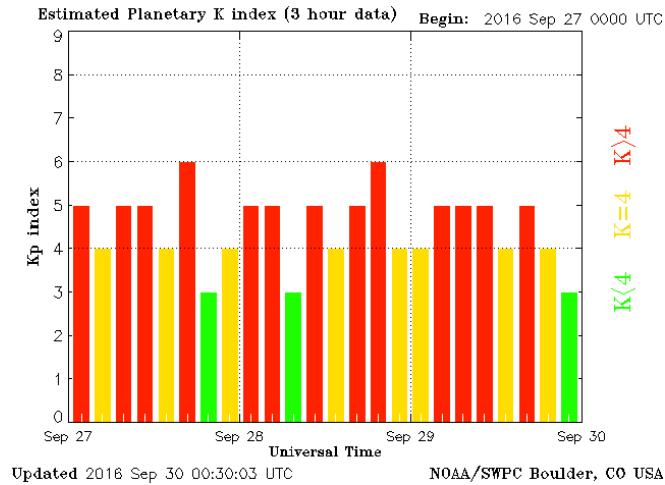
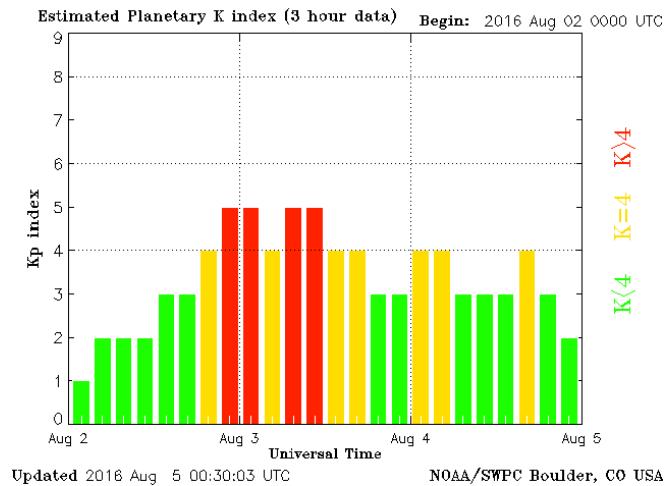
Figure 6-1 K-Index for 1-3 September 2016**Figure 6-2 K-Index for 27-29 September 2016****Figure 6-3 K-Index for 2-4 August 2016**

Table 6-1 shows the position accuracy information for the quarter's worst-case storm day, March 6, 2016 (see Figure 6-1). The GPS SPS performance met all requirements during all storms that occurred during this quarter.

Table 6-1 Horizontal & Vertical Accuracy Statistics for September 2, 2016

Site	95% Horizontal (Meters)	95% Vertical (Meters)	Maximum Horizontal (Meters)	Maximum Vertical (Meters)
Albuquerque	2.353	2.842	2.965	5.774
Anchorage	2.131	4.633	2.698	6.187
Atlanta	2.081	5.19	2.412	7.262
Barrow	1.667	4.602	2.255	5.580
Bethel	1.934	5.255	2.252	5.829
Billings	2.151	4.322	2.507	6.762
Boston	1.918	5.286	2.415	6.535
Cleveland	2.435	5.372	3.008	7.844
Cold Bay	1.515	4.845	2.135	6.299
Fairbanks	2.107	4.335	2.712	5.884
Gander	1.715	4.683	2.209	5.655
Honolulu	4.789	3.491	5.469	4.680
Houston	2.444	3.099	2.970	5.112
Iqaluit	1.599	4.153	2.459	7.272
Juneau	2.106	4.102	2.78	5.098
Kansas City	2.113	5.185	2.887	7.364
Kotzebue	2.259	4.454	3.04	5.387
Los Angeles	2.592	3.884	3.19	5.526
Merida	3.501	3.177	3.832	5.311
Miami	2.333	4.624	3.132	6.540
Minneapolis	2.321	4.767	3.200	7.307
Oakland	2.416	4.342	3.269	6.842
Salt Lake City	2.253	3.871	3.045	6.319
San Jose Del Cabo	3.799	2.654	4.716	4.134
San Juan	2.713	4.391	3.290	5.953
Seattle	1.989	4.326	2.493	6.267
Tapachula	3.464	4.217	4.341	7.396
Washington, DC	2.046	5.573	2.466	7.658

7 IGS Data

GPS SPS accuracy performance was evaluated at a selection of high rate IGS stations⁽¹⁾. The IGS is a voluntary federation of many worldwide agencies that pool resources and permanent GNSS station data to generate precise GNSS products.

Sites with high data rate (1 Hz) with good availability which are outside of the WAAS service area that also provide a good geographic distribution have been selected. The 3 Russian Federation sites, MOBN, NRIL, and PETS, were not in service. To facilitate differentiating between GPS accuracy issues and receiver tracking problems, an automatic data screening function excluded errors greater than 500 meters and or times when VDOP or HDOP were greater than 10. The remaining receiver tracking issues are still included in the processing and are forced into the 50.1 meter histogram bin. These issues cause the outliers seen in the 99.99% statistics and are visible in the 95% accuracy trend plots.

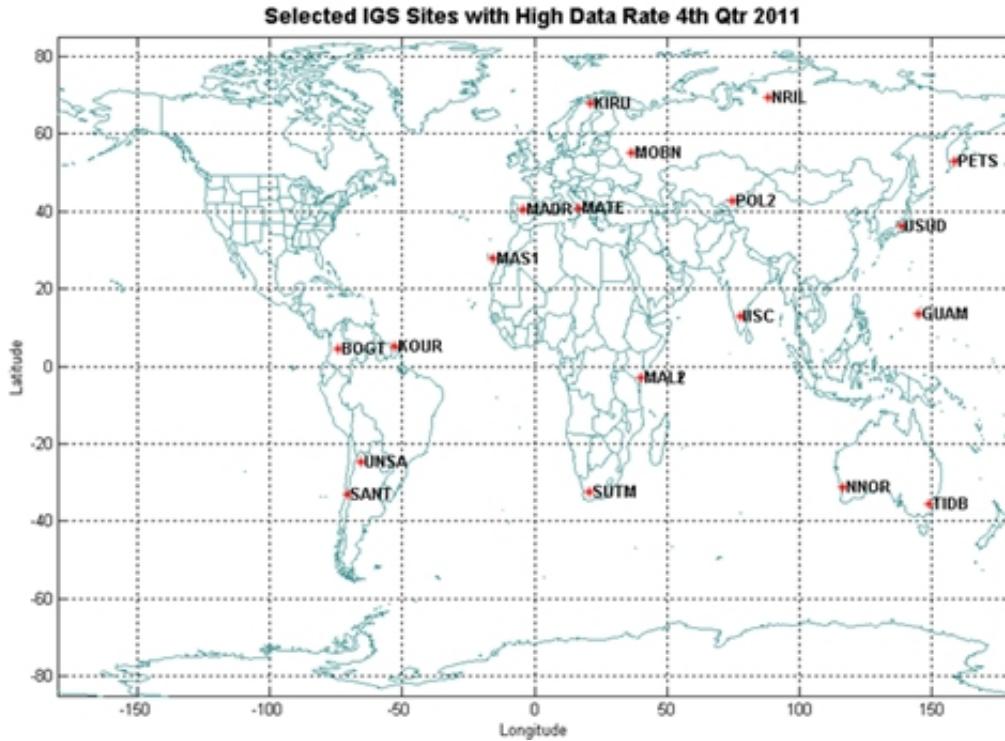
High quality broadcast navigation data and Klobuchar model data is created by voting across all available IGS high rate RINEX navigation data. Some manual review may be necessary to recover missing navigation data where the number of IGS sites reporting navigation data was below the voting threshold (i.e. 4).

Table 7.1 and Figure 7-1 show the IGS site information and locations. The Russian Federation sites were unavailable for this reporting period. Table 7.2 shows the GPS SPS Accuracy Performance observed at a selection of High Rate IGS sites. Figure 7-2 shows the 95% horizontal accuracy trends at these sites. Figure 7-3 shows the 95% vertical accuracy trends at these sites. A value of zero indicates no data. The ramping error in the trend plots for the equatorial sites is due to seasonal variations in the ionosphere that cannot be corrected by the Klobuchar thin shell model of the ionosphere utilized by single frequency GPS SPS receivers.

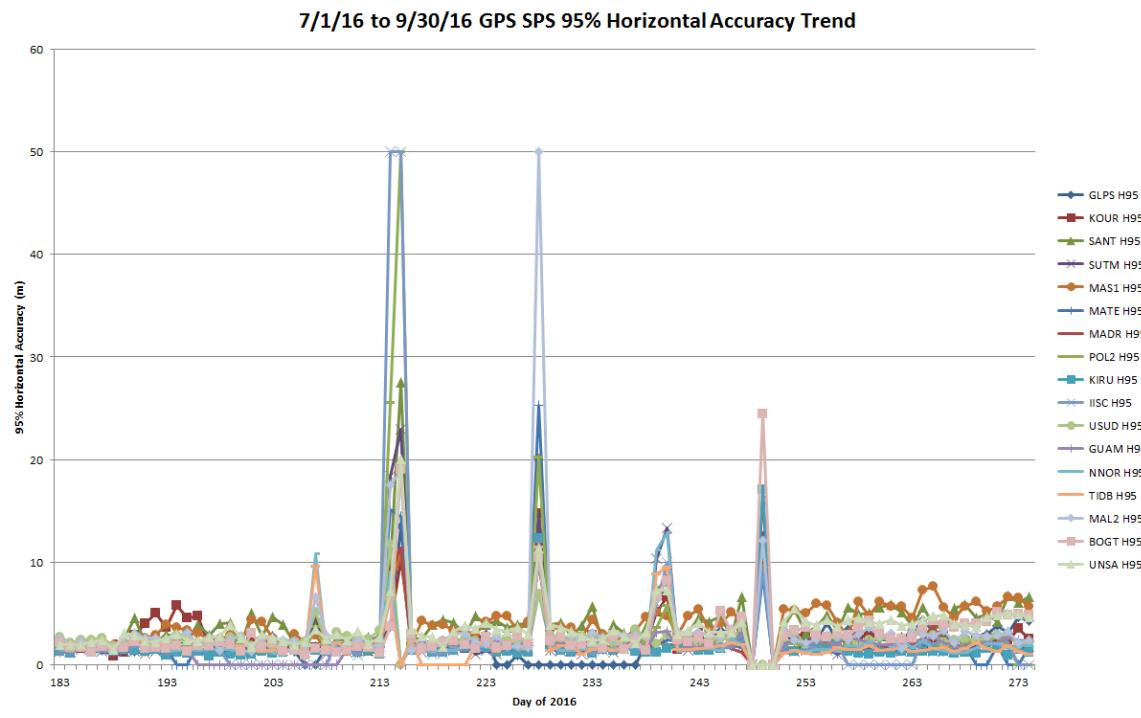
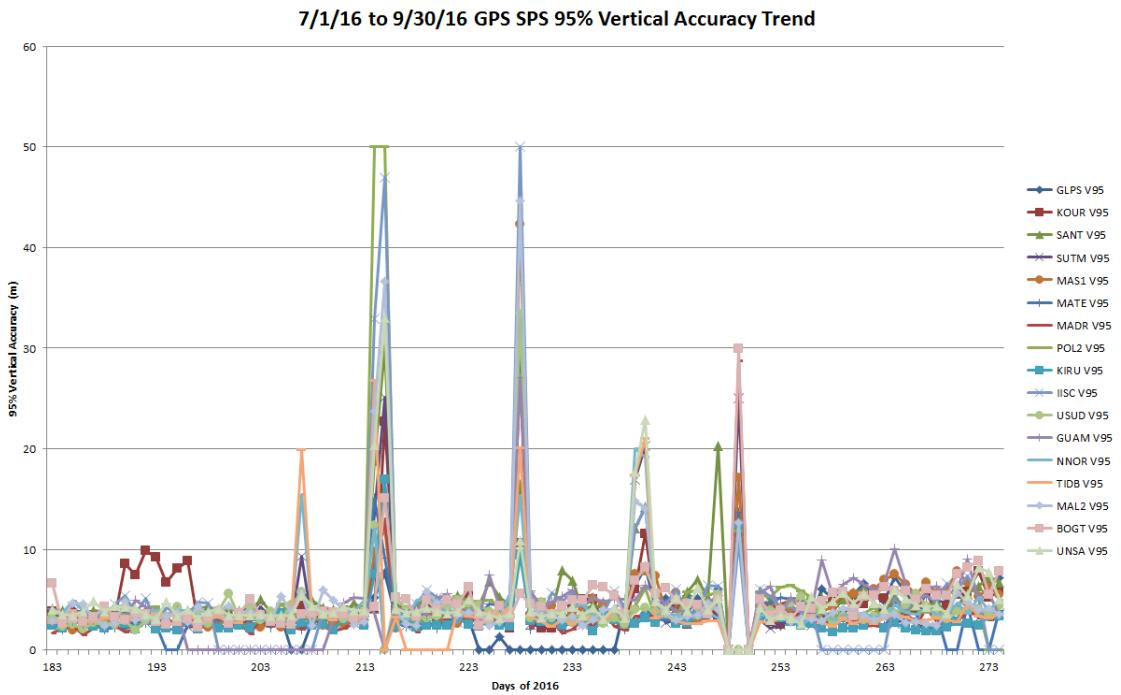
(1) J.M. Dow, R.E. Neilan, G. Gendt, "The International GPS Service (IGS): Celebrating the 10th Anniversary and Looking to the Next Decade," Adv. Space Res. 36 vol. 36, no. 3, pp. 320-326, 2005. Doi: 10.1016/j.asr.2005.05.125

Table 7-1 Selected IGS Site Information

ID	City	Country
BOGT	Bogota	Colombia
GLPS	Puerto Ayora	Ecuador
GUAM	Dededo	Guam
IISC	Bangalore	India
KIRU	Kiruna	Sweden
KOUR	Kourou	French Guyana
MADR	Robledo	Spain
MAL2	Malindi	Kenya
MAS1	Maspalomas	Spain
MATE	Matera	Italy
MOBN*	Obninsk	Russian Federation
NNOR	New Norcia	Australia
NRIL*	Norilsk	Russian Federation
PETS*	Petropavlovsk-Kamchatka	Russian Federation
POL2	Bishkek	Kyrgyzstan
SUTM	Sutherland	South Africa
TIDB	Tidbinbillla	Australia
UNSA	Salta	Argentina
USUD	Usuda	Japan

Figure 7-1 Selected IGS Site Locations**Table 7-2 GPS SPS Performance at Selected High Rate IGS Sites**

Site	95% Horizontal Error (m)	95% Vertical Error (m)	99.99% Horizontal Error (m)	99.99% Vertical Error (m)	Percent Data Available
BOGT	3.28	5.07	29.45	34.13	94.81%
GLPS	2.7	4.32	23.48	50.01	78.02%
GUAM	2.19	5.27	13.58	27.11	78.59%
IISC	2.06	5.02	50.01	50.01	71.83%
KIRU	1.56	2.83	27.31	49.28	96.19%
KOUR	2.62	4.73	20.52	50.01	95.23%
MADR	1.95	3.37	32.36	45.21	96.50%
MAL2	2.98	4.16	50.01	50.01	96.04%
MAS1	4.86	4.4	47.79	50.01	96.76%
MATE	2.05	3.73	30.76	50.01	88.73%
MOBN	--	--	--	--	--
NNOR	1.82	3.93	29.49	36.87	93.71%
NRIL	--	--	--	--	--
PETS	--	--	--	--	--
POL2	2.21	4.27	50.01	50.01	87.13%
SANT	4.34	4.81	40.15	49.58	92.00%
SUTM	1.79	3.44	50.01	50.01	92.05%
TIDB	1.87	3.39	17.75	31.31	88.30%
UNSA	3.8	4.51	33.29	42.7	94.92%
USUD	2.56	3.89	12.09	33.32	93.78%

Figure 7-2 GPS SPS 95% Horizontal Accuracy Trends at Selected IGS Sites**Figure 7-3 GPS SPS 95% Vertical Accuracy Trends at Selected IGS Sites**

8 RAIM Performance

Receiver autonomous integrity monitoring (RAIM) is a technology developed to assess the integrity of GPS signals in a GPS receiver system. It is especially important in safety critical GPS applications, such as aviation. In order for a GPS receiver to perform RAIM or fault detection (FD) function, a minimum of five visible satellites with satisfactory geometry must be visible. RAIM has various kinds of implementations; one of them performs consistency checks between all position solutions obtained with various subsets of the visible satellites. The receiver provides an alert to the pilot if the consistency checks fail.

Availability is a performance indicator of the RAIM algorithm. Availability is a function of the geometry of the constellation in view and of other environmental conditions. All the analysis performed here is utilizing the “Fault-Detection with no baro-aiding and SA off” RAIM implementation. Additional modes will be assessed at a future date. The test statistic used is a function of the pseudorange measurement residual (the difference between the expected measurement and the observed measurement) and the amount of redundancy. The test statistic is compared with a threshold value, and is determined based on the requirements for the probability of false alarm (Pfa), the probability of missed detection (Pmd), and the expected measurement noise. In aviation systems, the Pfa is fixed at 1/15000.

The horizontal protection limit (HPL) is a figure which represents the radius of a circle in the horizontal plane, centered on the GPS position solution, and is guaranteed to contain the true position of the receiver to within the specifications of the RAIM scheme (i.e. meets the Pfa and Pmd). The HPL is calculated as a function of the RAIM threshold and the satellite geometry at the time of the measurement. The HPL is compared with the horizontal alarm limit (HAL) to determine if RAIM is available. The RNP values shown here are measured in nautical miles, the computed HPL must be less than the RNP value for the service to be available.

8.1 Site Performance

Table 8-1 shows the RAIM performance for the twenty-eight sites evaluated. For all sites collected, the minimum percent of time in RNP 0.1 mode was 99.70% at Los Angeles, California. The minimum percent of time spent in RNP 0.3 mode was 99.99% at three locations (Tapachula, Mexico – Oakland, CA – Seattle, WA). The maximum 99% HPL value was 145.96 meters at Los Angeles, California.

Table 8-1 RAIM Site Statistics

CITY	99% HPL	Percent RNP 0.1	Percent RNP 0.3
Albuquerque	95.08	99.995	100
Anchorage	123.24	99.995	100
Atlanta	104.00	100	100
Barrow	107.61	99.999	100
Bethel	124.97	100	100
Billings	114.47	99.975	100
Boston	112.14	100	100
Cleveland	105.59	100	100
Cold Bay	113.64	100	100
Fairbanks	115.74	99.994	100
Gander	123.82	99.985	100
Honolulu	148.87	99.894	100
Houston	101.74	99.985	99.998
Iqaluit	128.08	99.989	100
Juneau	130.37	99.988	100
Kansas City	101.01	99.996	100
Kotzebue	107.84	99.999	100
Los Angeles	86.59	99.997	100
Merida	92.58	99.983	100
Miami	122.82	99.990	100
Minneapolis	111.48	99.984	100
Oakland	105.39	99.995	100
Salt Lake City	102.88	99.987	100
San Jose Del Cabo	81.88	99.986	100
San Juan	83.04	100	100
Seattle	106.61	99.990	100
Tapachula	98.65	99.986	100
Washington DC	111.07	100	100

8.2 RAIM Coverage

Figures 8-1 through 8-2 show the world wide RAIM coverage for both RNP 0.1 and RNP 0.3 respectively. Figures 8-3 through 8-4 show the daily RAIM coverage trends between 1 July and 30 September 2016.

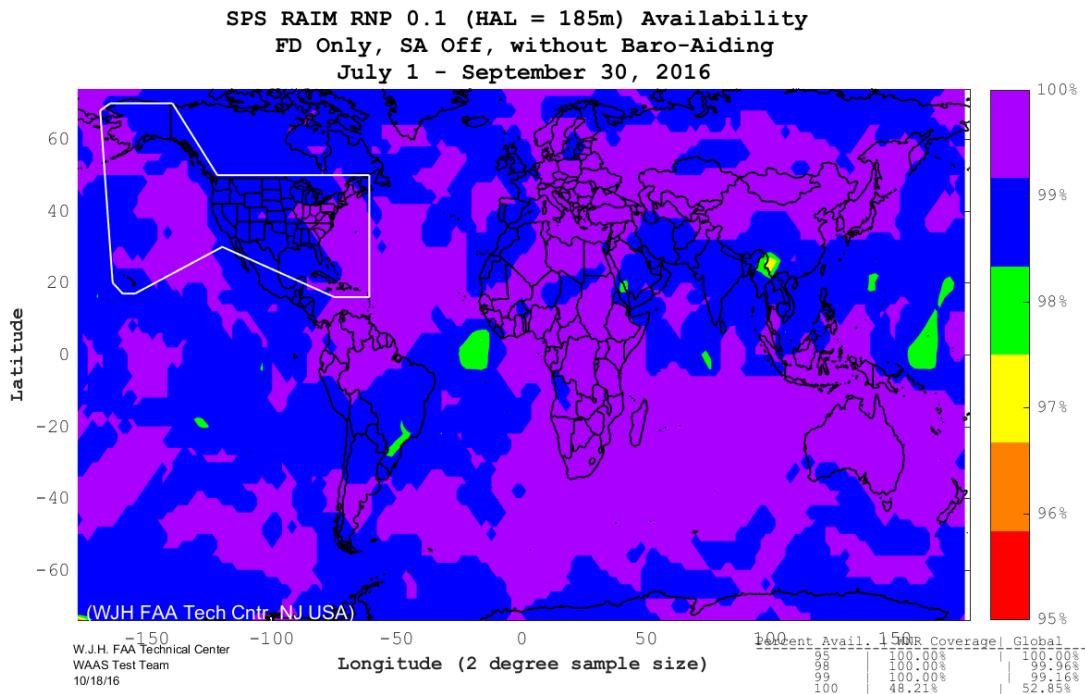
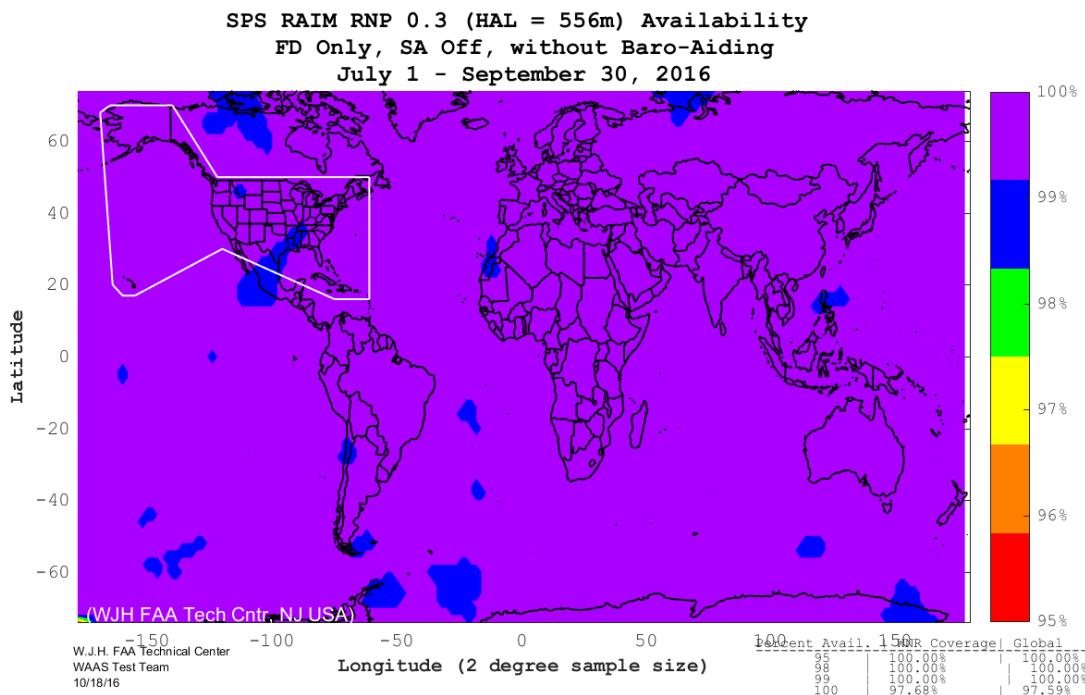
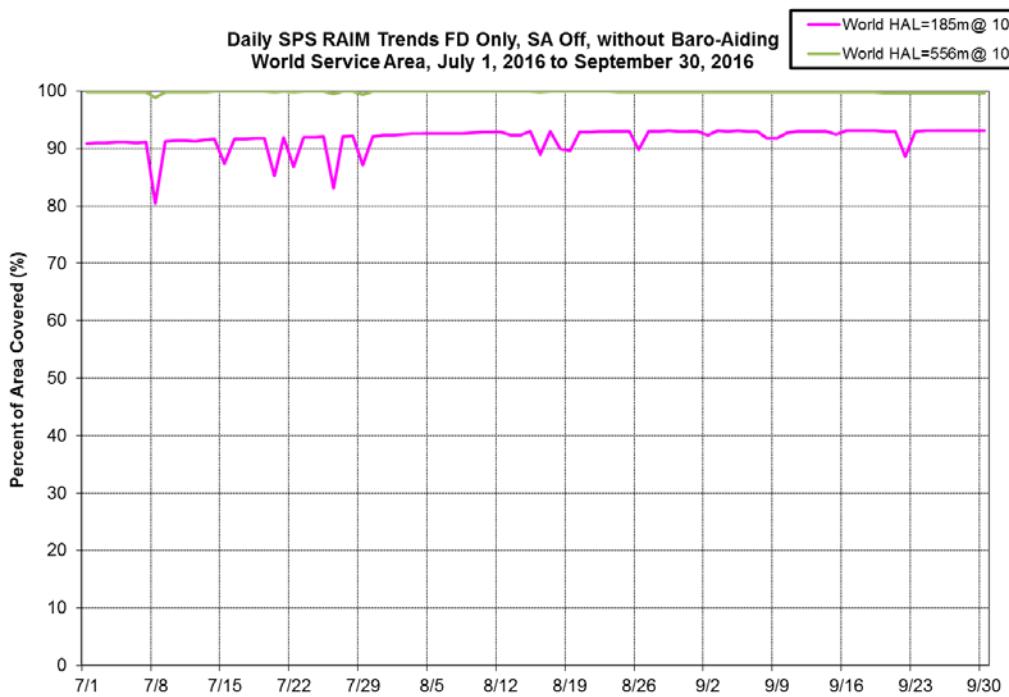
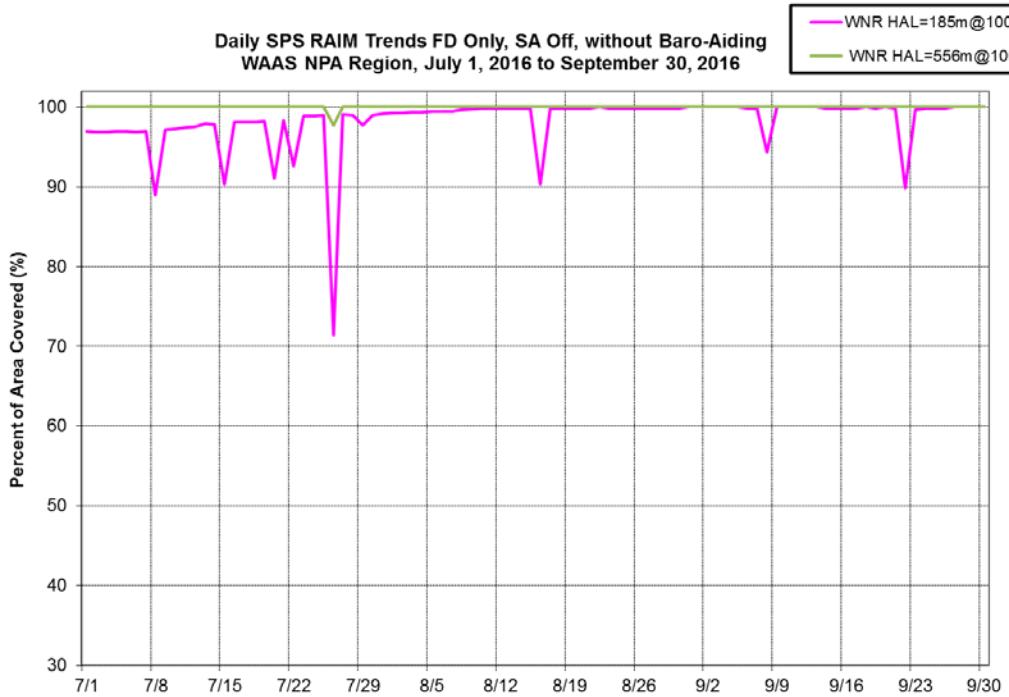
Figure 8-1 RAIM RNP 0.1 Coverage**Figure 8-2 RAIM RNP 0.3 Coverage**

Figure 8-3 RAIM World Wide Coverage Trend**Figure 8-4 RAIM RNP Coverage Trend for WAAS NPA Service Area**

8.3 RAIM Airport Analysis

Figures 8-5 and 8-6 shows RAIM RNP 0.1 and RNP 0.3 availability at all U.S. and Canadian airports that have an RNAV (GPS) published approach or better.

Figure 8-5 RAIM RNP 0.1 Airport Availability

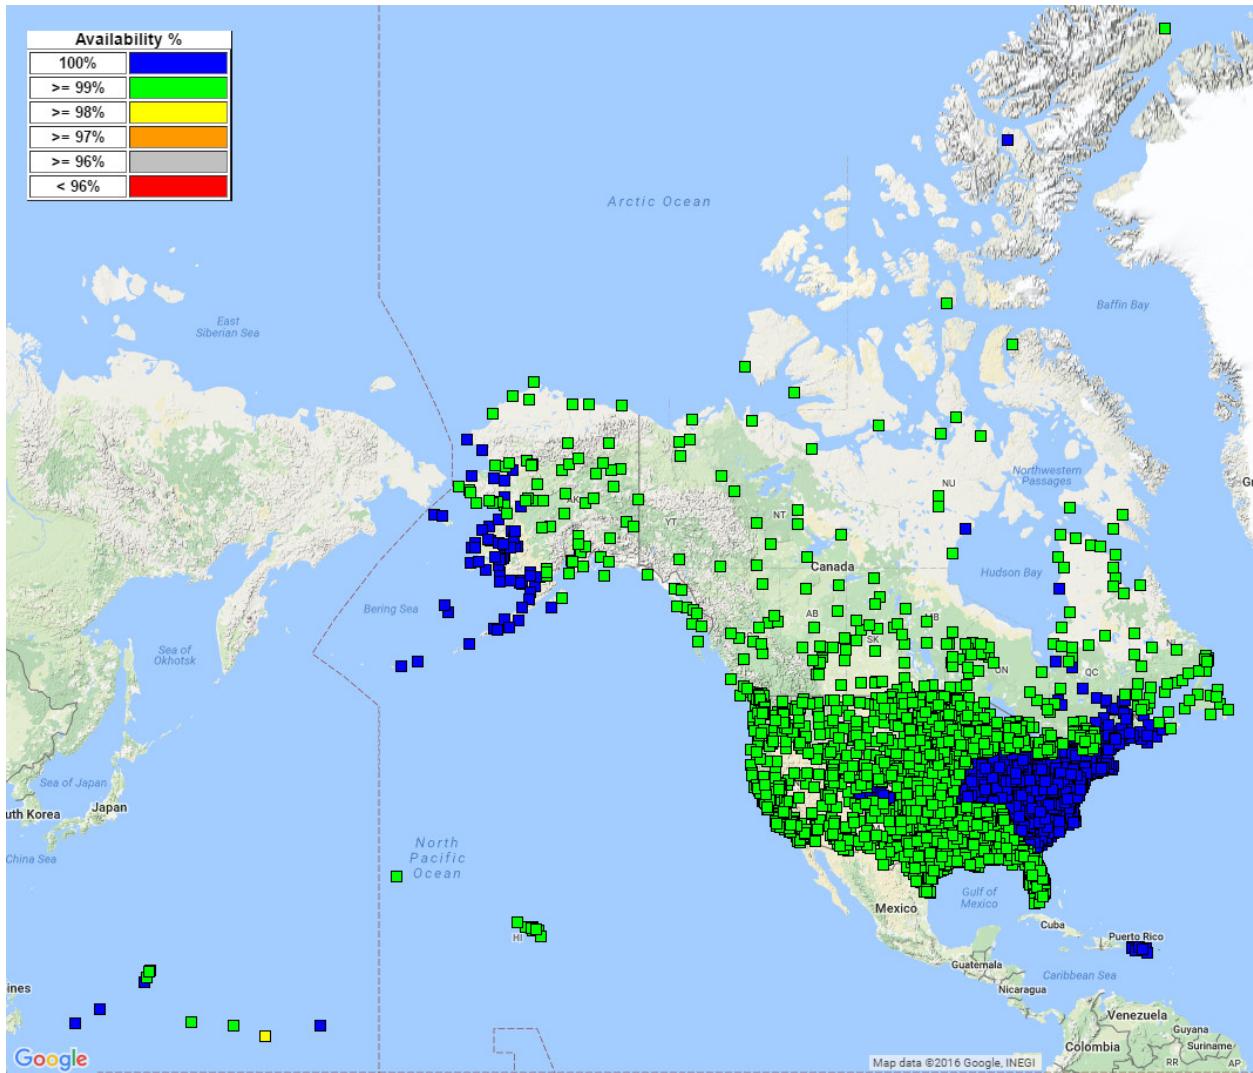
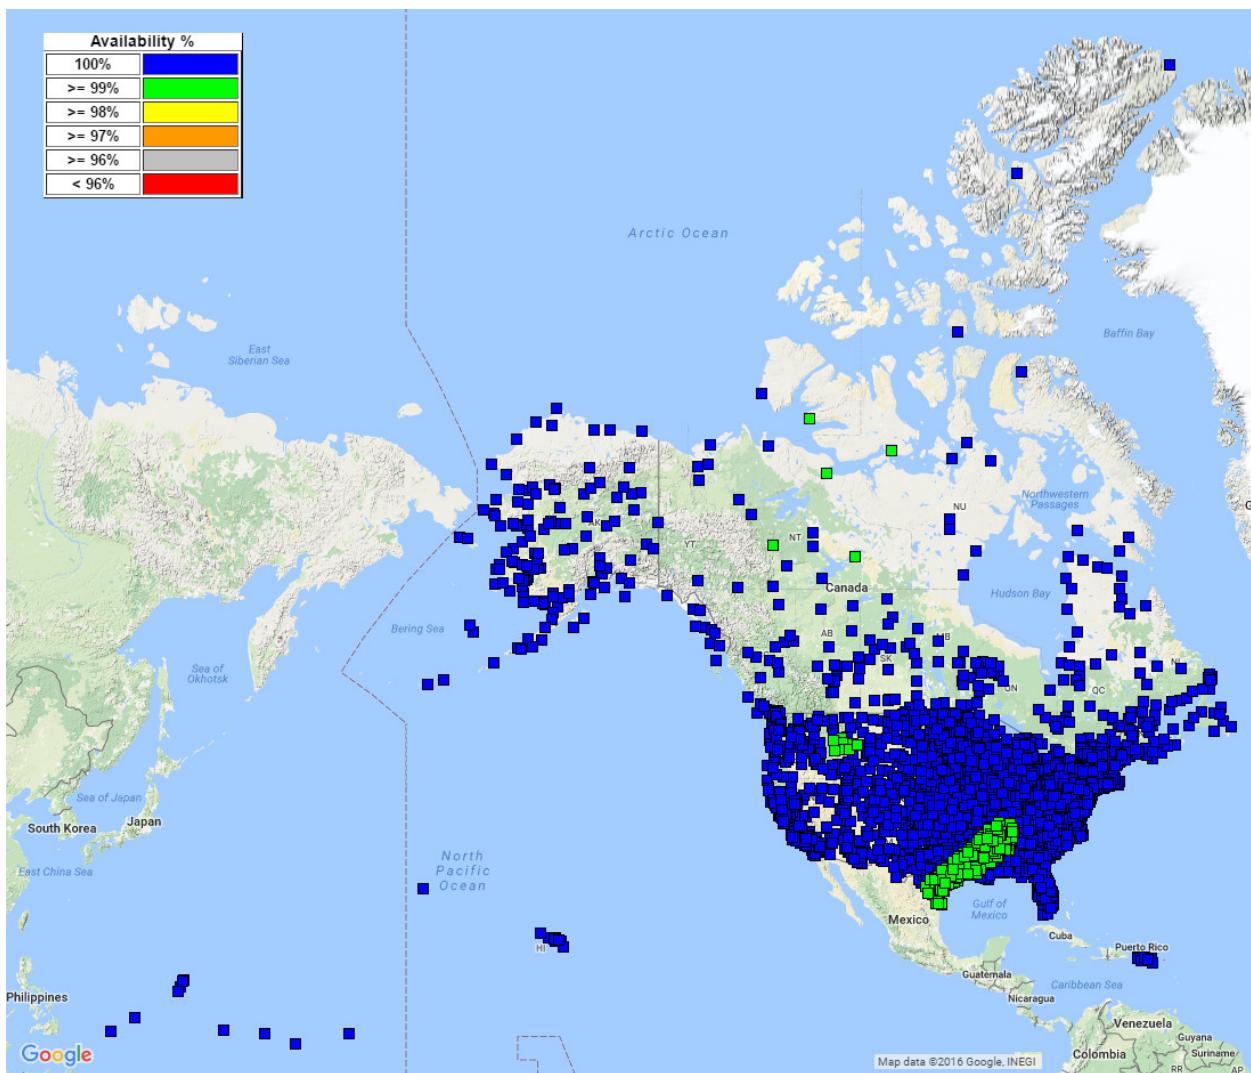


Figure 8-6 RAIM RNP 0.3 Airport Availability

Figures 8-7 and 8-8 respectively show the number of RAIM RNP 0.1 and RAIM RNP 0.3 outages for every airport in the U.S. and Canada that have a RNAV (GPS) published approach or better.

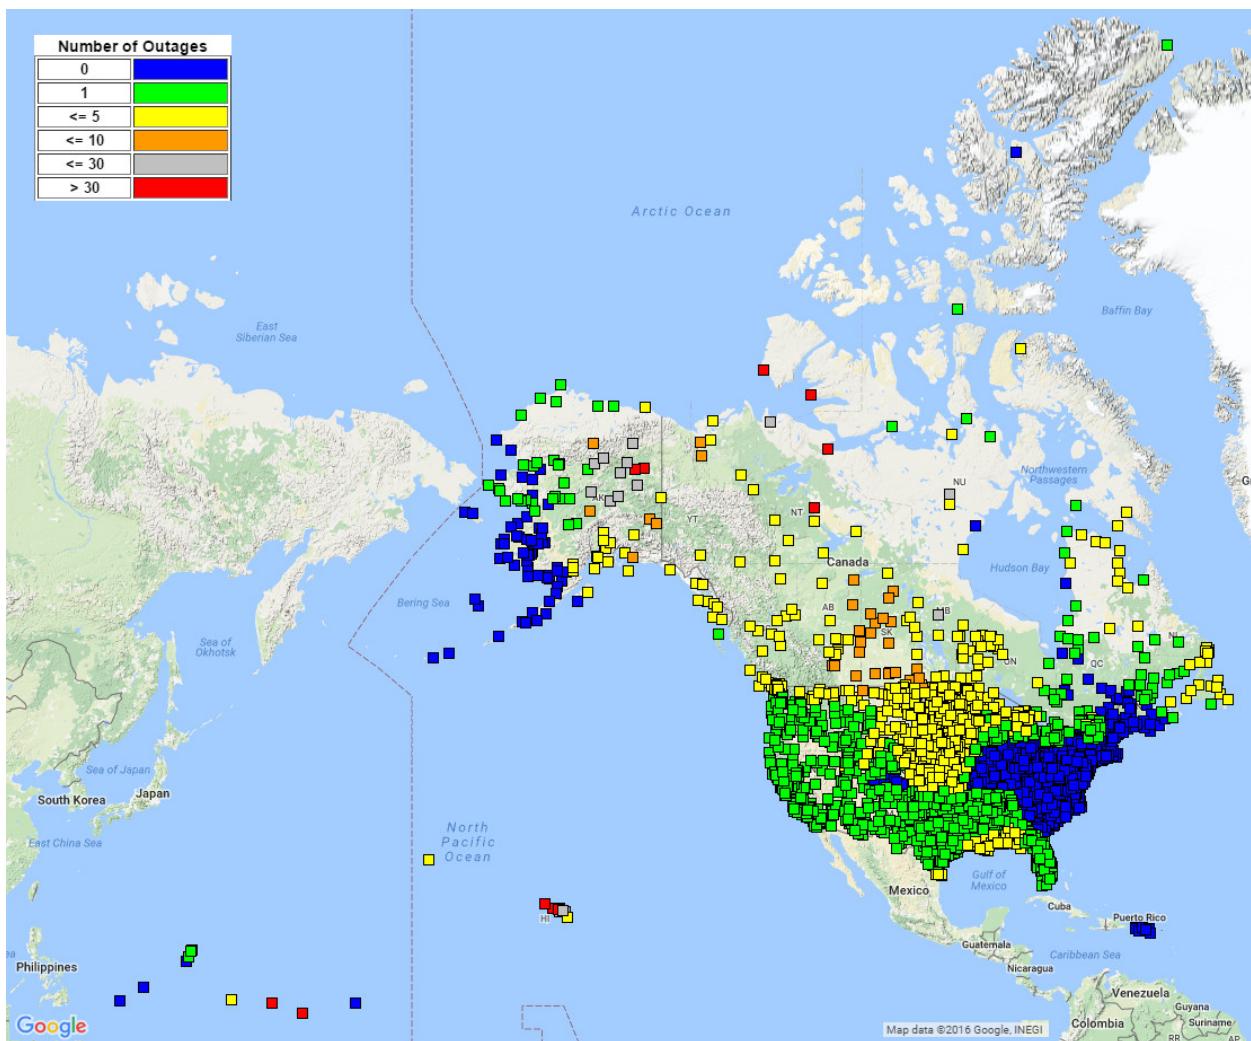
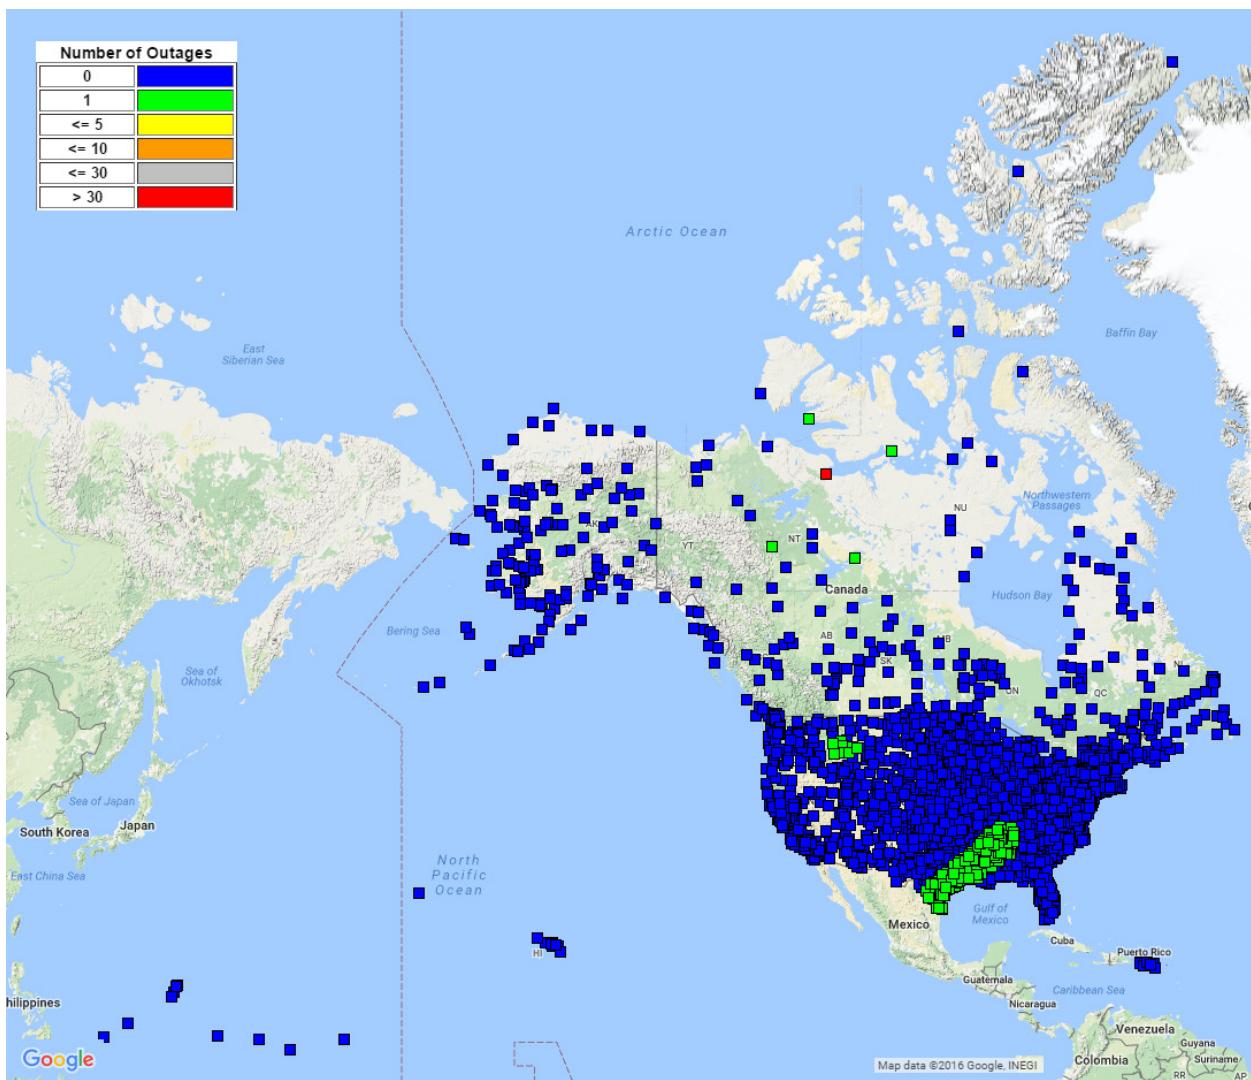
Figure 8-7 RAIM RNP 0.1 Airport Outages

Figure 8-8 RAIM RNP 0.3 Airport Outages

9 GPS Test NOTAMs Summary

GPS test NOTAM: Global Positioning System test Notices to Airmen - GPS test NOTAMs are issued in the event that GPS is predicted to be unreliable and/or unavailable at a defined location for specific times, as indicated in the NOTAM, due to scheduled testing events.

Status and Problem Reporting	Conditions and Constraints
Scheduled event affecting service <ul style="list-style-type: none"> Appropriate GPS Test NOTAM issued to the FAA at least 5 hours prior to the event 	<ul style="list-style-type: none"> For any SPS SIS

9.1 GPS Test NOTAMs Issued

GPS test NOTAMs were tracked and trended from GPS test NOTAMs posted on the FAA Pilot Web website (<https://pilotweb.nas.faa.gov/PilotWeb/>). During this reporting period, 1 July through 30 September 2016, there were a total of 49 GPS test NOTAMs. The total number of days affected in this reporting period is 56. Tables 8.1 and 8.2 below list the statistics of areas affected and durations. Note that the minimum, average, and maximum durations are on a per GPS test NOTAM basis.

Table 9-1 GPS test NOTAM Durations

Cumulative Duration	292.4 hours
Minimum Duration	0.48 hours
Media Duration	3.50 hours
Average Duration	4.64 hours
Maximum Duration	11.0 hours

Table 9-2 GPS Test NOTAM Affected Areas (Square Miles) by Altitude

	40,000 feet	25,000 feet	10,000 feet	4,000 feet	50 feet
Minimum	206,892	128,872	50,341	40,776	7,693
Average	685,327	534,531	355,433	308,543	239,984
Maximum	1,222,173	986,716	709,634	730,402	662,338

9.2 Tracking and Trending of GPS Test NOTAMs

The GPS Test NOTAMs that are tracked and trended for this reporting period were done with a specialized software analysis tool that is designed to not only trend but also archive GPS Test NOTAMs. It is designed to trend archived GPS Test NOTAMs for any specified time frame. In addition to the data provided in this report, this tool will provide all data presented here along with airports with affected procedures via a web interface. The web interface is available at the following URL: <http://waas.faa.gov/static/sog/notam/index.html>.

The five plots below illustrate a visual depiction of the affected areas at their corresponding altitudes along with the impacted RNAV routes (indicated in red). Note that some GPS Test NOTAMs occupy the same area and position but differ in effective dates and/or durations.

Figure 9-1 GPS Test NOTAMs @ FL400

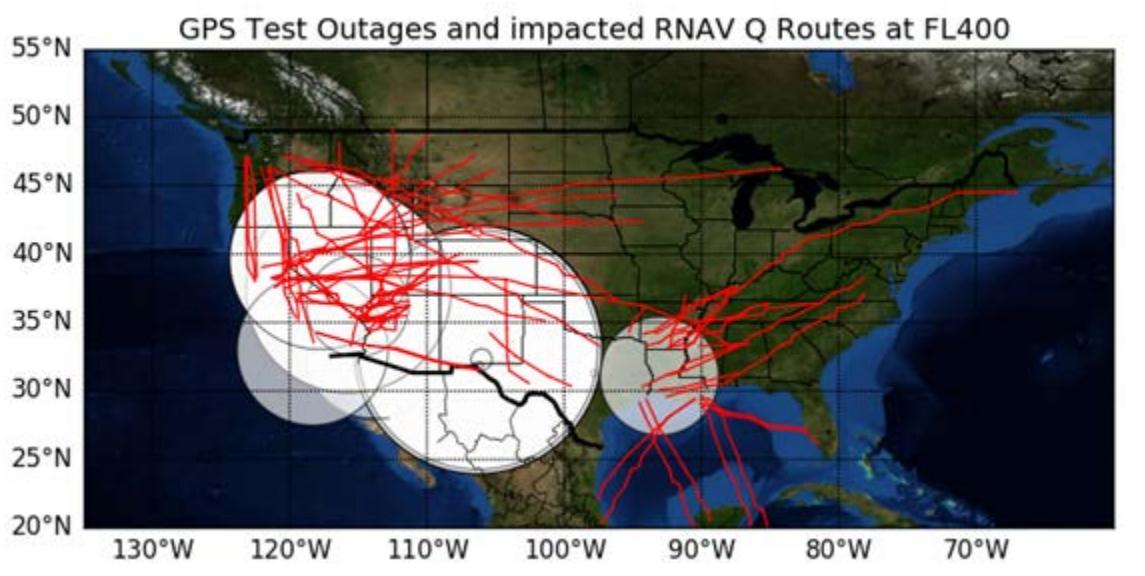


Figure 9-2 GPS NOTAMs @ FL250

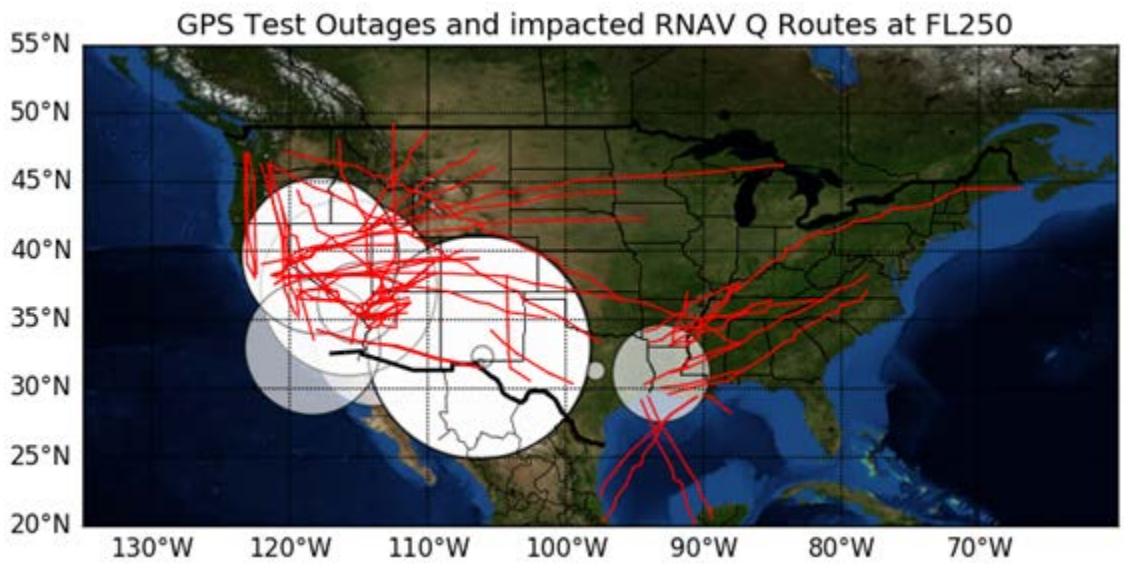
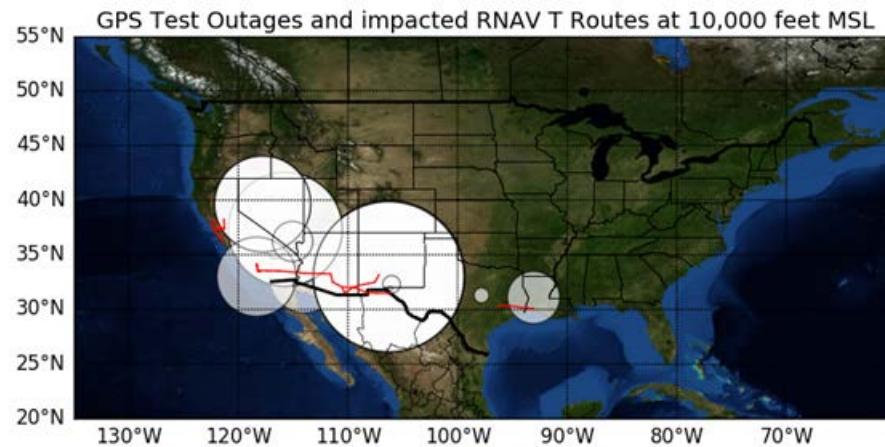
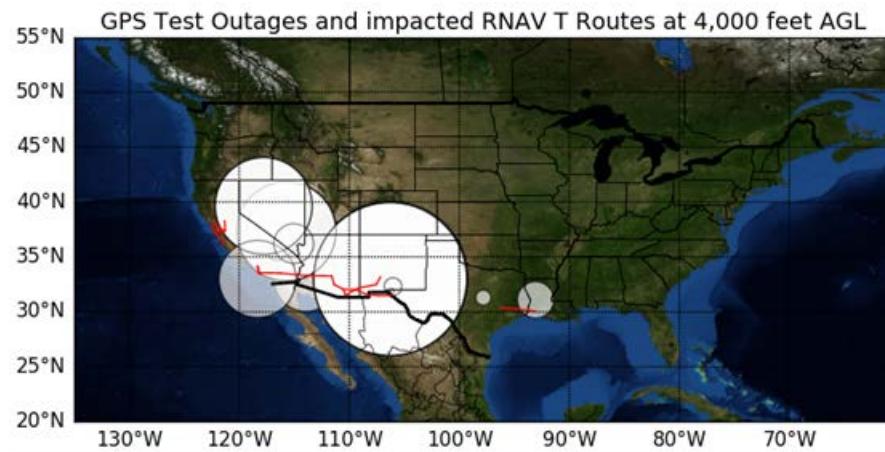
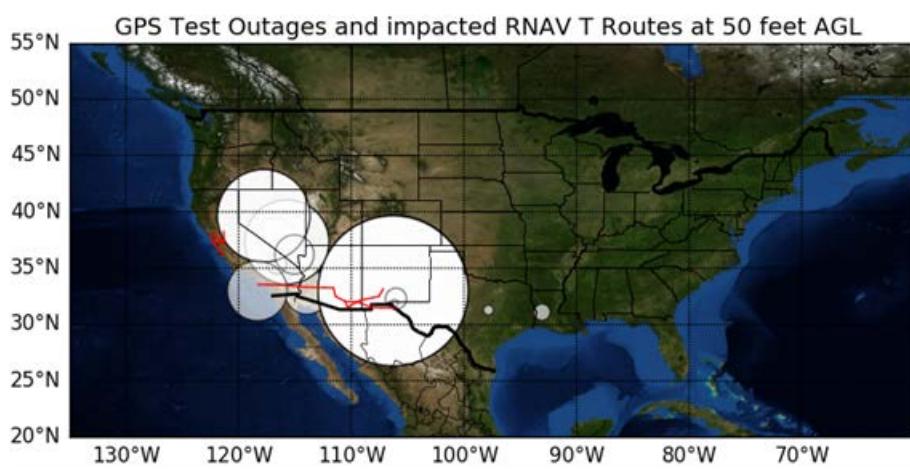


Figure 9-3 GPS NOTAMs @ 10k Feet**Figure 9-4 GPS NOTAMs @ 4k Feet****Figure 9-5 GPS NOTAMs @ 50 Feet**

9.3 GPS Availability

The impacts to GPS availability are listed below for the corresponding locations and times. The percent impact to GPS availability over CONUS indicates that GPS is impacted for X % of the total area (total area of CONUS), centered at the indicated latitude/longitude. The last five columns in each table represent the impact to GPS availability at the corresponding altitude range. Altitudes 4,000 feet and under are with respect to above ground level (AGL), all remaining altitudes are with respect to MSL (mean sea level). Each row of the following table represents one GPS Test NOTAM. The remaining tables each represent one GPS Test NOTAM.

Table 9-3 NOTAM Impact to GPS Availability

START DATE	END DATE	LAT	LONG	50	Percent Impact at Each Site			
					4000	10000	FL250	FL400
2016-07-07 00:00:01	2016-07-07 00:59:00	315437.0000N	1060917.0000W	0.10	0.10	0.10	0.10	0.10
2016-07-11 03:00:00	2016-07-12 13:30:00	325928.0000N	1061655.0000W	13.52	14.45	14.14	18.89	21.98
2016-07-13 03:00:00	2016-07-13 05:20:00	325928.0000N	1061655.0000W	13.52	14.45	14.14	18.89	21.98
2016-07-13 05:20:00	2016-07-14 06:20:00	371934.0000N	1154249.0000W	5.68	8.36	10.73	15.17	18.89
2016-07-13 06:20:00	2016-07-13 13:30:00	325928.0000N	1061655.0000W	13.52	14.45	14.14	18.89	21.98
2016-07-13 20:00:00	2016-07-13 23:00:00	311724.0000N	974905.0000W	0.10	0.10	0.10	0.10	0.00
2016-07-14 06:30:00	2016-07-14 13:30:00	325928.0000N	1061655.0000W	13.52	14.45	14.14	18.89	21.98
2016-07-14 13:30:00	2016-07-16 23:00:00	311724.0000N	974905.0000W	0.10	0.10	0.10	0.10	0.00
2016-07-15 05:30:00	2016-07-16 13:30:00	325928.0000N	1061655.0000W	13.52	14.45	14.14	18.89	21.98
2016-07-19 05:00:00	2016-07-23 07:30:00	371934.0000N	1154249.0000W	5.68	8.36	10.73	15.17	18.89
2016-07-20 07:30:00	2016-07-22 07:59:00	361304.0000N	1150307.0000W	1.14	1.34	1.44	3.51	5.68
2016-07-21 05:00:00	2016-07-21 07:30:00	371934.0000N	1154249.0000W	5.68	8.36	10.73	15.17	18.89
2016-07-21 07:30:00	2016-07-21 07:59:00	361304.0000N	1150307.0000W	1.14	1.34	1.44	3.51	5.68
2016-07-22 05:00:00	2016-07-22 07:30:00	371934.0000N	1154249.0000W	5.68	8.36	10.73	15.17	18.89
2016-07-22 07:30:00	2016-07-22 07:59:00	361304.0000N	1150307.0000W	1.14	1.34	1.44	3.51	5.68
2016-07-23 05:00:00	2016-07-23 07:30:00	371934.0000N	1154249.0000W	5.68	8.36	10.73	15.17	18.89
2016-07-23 07:30:00	2016-07-23 07:59:00	361304.0000N	1150307.0000W	1.14	1.34	1.44	3.51	5.68
2016-07-26 07:30:00	2016-07-27 07:59:00	361304.0000N	1150307.0000W	1.14	1.34	1.44	3.51	5.68
2016-07-27 05:00:00	2016-07-29 07:30:00	371934.0000N	1154249.0000W	5.68	8.36	10.73	15.17	18.89
2016-07-28 07:30:00	2016-07-28 07:59:00	361304.0000N	1150307.0000W	1.14	1.34	1.44	3.51	5.68

					<u>Percent Impact at Each Site</u>			
START DATE	END DATE	LAT	LONG	50	4000	10000	FL250	FL400
2016-07-31 04:30:00	2016-07-31 13:30:00	352253.0000N	1163713.0000W	0.41	0.31	0.31	0.31	0.31
2016-08-01 04:30:00	2016-08-07 13:30:00	352253.0000N	1163713.0000W	0.41	0.31	0.31	0.31	0.31
2016-08-05 04:30:00	2016-08-06 13:30:00	325928.0000N	1061655.0000W	13.52	14.45	14.14	18.89	21.98
2016-08-08 16:30:00	2016-08-12 20:00:00	651819.0000N	1445614.0000W	0.00	0.00	0.00	0.00	0.00
2016-08-08 16:30:00	2016-08-09 17:30:00	393835.0000N	1174702.0000W	7.22	8.05	7.84	12.80	15.89
2016-08-09 22:40:00	2016-08-13 00:01:00	651819.0000N	1445614.0000W	0.00	0.00	0.00	0.00	0.00
2016-08-10 00:00:00	2016-08-12 02:10:00	651819.0000N	1445614.0000W	0.00	0.00	0.00	0.00	0.00
2016-08-12 16:30:00	2016-08-12 20:00:00	634714.0000N	1455141.0000W	0.00	0.00	0.00	0.00	0.00
2016-08-15 16:30:00	2016-08-18 20:00:00	651819.0000N	1445614.0000W	0.00	0.00	0.00	0.00	0.00
2016-08-15 18:30:00	2016-08-26 23:30:00	332811.0000N	1063917.0000W	2.99	5.37	5.37	9.08	11.87
2016-08-15 22:40:00	2016-08-19 02:10:00	651819.0000N	1445614.0000W	0.00	0.00	0.00	0.00	0.00
2016-08-15 22:40:00	2016-08-16 02:10:00	634714.0000N	1455141.0000W	0.00	0.00	0.00	0.00	0.00
2016-08-18 16:30:00	2016-08-18 20:00:00	634714.0000N	1455141.0000W	0.00	0.00	0.00	0.00	0.00
2016-08-18 22:40:00	2016-08-19 02:10:00	634714.0000N	1455141.0000W	0.00	0.00	0.00	0.00	0.00
2016-08-20 04:30:00	2016-08-20 13:30:00	325928.0000N	1061655.0000W	13.52	14.45	14.14	18.89	23.22
2016-08-20 17:00:00	2016-08-20 23:59:00	374245.0000N	1163518.0000W	1.24	2.99	2.79	5.47	6.71
2016-08-25 04:30:00	2016-08-25 12:00:00	325928.0000N	1061655.0000W	13.52	14.45	14.14	18.89	23.22
2016-08-27 04:30:00	2016-08-27 12:00:00	325928.0000N	1061655.0000W	13.52	14.45	14.14	18.89	23.22
2016-08-28 03:00:00	2016-08-28 12:00:00	325928.0000N	1061655.0000W	13.52	14.45	14.14	18.89	23.22
2016-08-29 03:00:00	2016-08-29 13:30:00	325928.0000N	1061655.0000W	13.52	14.45	14.14	18.89	23.22
2016-08-29 18:30:00	2016-08-30 22:30:00	325928.0000N	1061655.0000W	13.52	14.45	14.14	18.89	23.22
2016-08-29 19:00:00	2016-08-29 22:00:00	310535.0000N	930350.0000W	0.10	0.93	2.17	4.54	6.30
2016-08-30 06:31:00	2016-08-30 13:30:00	325928.0000N	1061655.0000W	13.52	14.45	14.14	18.89	23.22
2016-08-30 08:00:00	2016-08-30 11:00:00	310535.0000N	930350.0000W	0.10	0.93	2.17	4.54	6.30
2016-09-07 10:00:00	2016-09-07 18:00:00	321804.0000N	1060125.0000W	0.41	0.21	0.21	0.21	0.21
2016-09-08 11:00:00	2016-09-08 19:00:00	321804.0000N	1060125.0000W	0.41	0.21	0.21	0.21	0.21

START DATE	END DATE	LAT	LONG	50	Percent Impact at Each Site			
					4000	10000	FL250	FL400
2016-09-09 05:00:00	2016-09-09 16:00:00	321804.0000N	1060125.0000W	0.41	0.21	0.21	0.21	0.21
2016-09-12 08:00:00	2016-09-12 16:00:00	321804.0000N	1060125.0000W	0.41	0.21	0.21	0.21	0.21
2016-09-13 21:30:00	2016-09-14 05:30:00	321804.0000N	1060125.0000W	0.41	0.21	0.21	0.21	0.21
2016-09-16 18:00:00	2016-09-16 23:30:00	393835.0000N	1174702.0000W	7.22	8.05	7.84	12.80	15.89
2016-09-16 21:30:00	2016-09-16 23:30:00	393835.0000N	1174702.0000W	7.22	8.05	7.84	12.80	15.89
2016-09-19 18:30:00	2016-09-19 22:30:00	325959.0000N	1181959.0000W	1.44	2.37	2.48	4.33	5.57
2016-09-20 16:30:00	2016-09-20 17:30:00	393835.0000N	1174702.0000W	7.22	8.05	7.84	12.80	15.89
2016-09-20 18:30:00	2016-09-20 21:30:00	325413.0000N	1135609.0000W	1.44	2.58	2.99	4.75	6.09
2016-09-20 20:30:00	2016-09-20 22:00:00	393835.0000N	1174702.0000W	7.22	8.05	7.84	12.80	15.89
2016-09-21 18:30:00	2016-09-21 22:30:00	325959.0000N	1181959.0000W	1.44	2.37	2.48	4.33	5.57
2016-09-22 04:30:00	2016-09-22 13:30:00	330411.0000N	1061247.0000W	13.42	14.76	14.34	19.30	23.32
2016-09-22 18:30:00	2016-09-22 21:30:00	325413.0000N	1135609.0000W	1.44	2.58	2.99	4.75	6.09
2016-09-24 04:30:00	2016-09-24 13:30:00	330411.0000N	1061247.0000W	13.42	14.76	14.34	19.30	23.32
2016-09-26 19:00:00	2016-09-27 22:30:00	330411.0000N	1061247.0000W	13.42	14.76	14.34	19.30	23.32
2016-09-28 23:00:00	2016-09-29 00:01:00	393835.0000N	1174702.0000W	7.22	8.05	7.84	12.80	15.89
2016-09-29 00:00:00	2016-09-29 00:30:00	393835.0000N	1174702.0000W	7.22	8.05	7.84	12.80	15.89

10 Appendices

10.1 Appendix A: Performance Summary

Table 10-1 Performance Summary

User Range Error Accuracy	Conditions and Constraints	Measured Performance
Single Frequency C/A-Code • ≤ 7.8m 95% Global Average URE during normal operations over All AODs • ≤ 6.0m 95% Global Average URE during operations at Zero AOD • ≤ 12.8m 95% Global Average URE during normal operations at Any AOD	<ul style="list-style-type: none"> For any healthy SPS SIS Neglecting single-frequency ionospheric delay model errors Including group delay time correction (T_{GD}) errors at L1 Including inter-signal bias (P(Y)-code to C/A-code) errors at L1 	≤ 2.620 m N/A N/A
Single Frequency C/A-Code • ≤ 30m 99.94% Global Average URE during normal operations • ≤ 30m 99.79% Worst Case single point average during normal operations.	<ul style="list-style-type: none"> For any healthy SPS SIS. Neglecting single-frequency ionospheric delay model errors Including group delay time correction (T_{GD}) errors at L1 Including inter-signal bias (P(Y)-code to C/A-code) errors at L1 Standard based on measurement interval of one year; average of daily values within service volume Standard based on 3 service failures per year, lasting no more than 6 hours each 	100% Global 100% WCP
User Range Rate Error Accuracy	Conditions and Constraints	
Single-Frequency C/A-Code: • ≤ 6 mm/sec 95% Global Average URRE over any 3-second interval during normal operations at Any AOD	<ul style="list-style-type: none"> For any healthy SPS SIS Neglecting all perceived pseudorange rate errors attributable to pseudorange step changes caused by NAV message data cutovers Neglecting single-frequency ionospheric delay model errors 	≤ 2.779 mm/sec
User Range Acceleration Error Accuracy	Conditions and Constraints	
Single-Frequency C/A-Code: • ≤ 2 mm/sec ² 95% Global average URAE over any 3-second interval during normal operations at Any AOD	<ul style="list-style-type: none"> For any healthy SPS SIS Neglecting all perceived pseudorange rate errors attributable to pseudorange step changes caused by NAV message data cutovers Neglecting single-frequency ionospheric delay model errors 	≤ 0.022 mm/s ²

Per-Satellite Coverage	Conditions and Constraints	Measured Performance
Terrestrial Service Volume: • 100% Coverage	• For any health or marginal SPS SIS	100%
Constellation Coverage	Conditions and Constraints	
Terrestrial Service Volume: • 100% Coverage	• For any health or marginal SPS SIS	100%
Status and Problem Reporting	Conditions and Constraints	
Scheduled event affecting service • Appropriate NANU issued to the Coast Guard and the FAA at least 48 hours prior to the event	• For any SPS SIS	≥ 104.55 hours Prior to event
Unscheduled outage or problem affecting service • Appropriate NANU issued to the Coast Guard and the FAA as soon as possible after the event	• For any SPS SIS	≤ 0.733 hours following the event
Unscheduled Failure Interruption Continuity • ≥ 0.9998 Probability over any hour of not losing the SPS SIS availability from a slot due to unscheduled interruption.	• Calculated as an average over all slots in the 24-slot constellation, normalized annually • Given that the SPS SIS is available from the slot at the start of the hour.	100%
Operational Satellite Count	Conditions and Constraints	
• ≥ 0.95 Probability that the constellation will have at least 24 operational satellites regardless of whether those operational satellites are located in slots or not	• Applies to the total number of operational satellites in the constellation (averaged over any day); where any satellite which appears in the transmitted navigation message almanac is defined to be an operation satellite regardless of whether that satellite is currently broadcasting a healthy SPS SIS or not and regardless of whether the broadcast SPS SIS also satisfies the other performance standards in the SPS performance standard or not.	100%
PDOP Availability	Conditions and Constraints	
• $\geq 98\%$ global PDOP of 6 or less • $\geq 88\%$ worst site PDOP of 6 or less	• Defined for a position/time solution meeting the representative user conditions and operating within the service volume over any 24-hour interval	100 % 100 %
Service Availability	Conditions and Constraints	
• $\geq 99\%$ Horizontal Service Availability, average location • $\geq 99\%$ Vertical Service Availability, average location	• 17m Horizontal (SIS only) 95% threshold • 37m Vertical (SIS only) 95% threshold • Defined for a position/time solution meeting the representative user conditions and operating within the service volume over any 24-hour interval.	100% Horizontal 100% Vertical
• $\geq 90\%$ Horizontal Service Availability, worst-case location • $\geq 90\%$ Vertical Service Availability, worst-case location	• 17m Horizontal (SIS only) 95% threshold • 37m Vertical (SIS only) 95% threshold • Defined for a position/time solution meeting the representative user conditions and operating within the service volume over any 24-hour interval.	100% Horizontal 100% Vertical

Position/Time Accuracy	Conditions and Constraints	
Global Average Position Domain Accuracy • ≤ 9m 95% Horizontal Error • ≤ 15m 95% Vertical Error	• Defined for a position/time solution meeting the representative user conditions • Standard based on a measurement interval of 24 hours averaged over all points in the service volume.	≤ 1.950 m Horizontal ≤ 3.393 m Vertical
Worst Site Position Domain Accuracy • ≤ 17m 95% Horizontal Error • ≤ 37m 95% Vertical Error	• Defined for a position/time solution meeting the representative user conditions • Standard based on a measurement interval of 24 hours averaged over all points in the service volume.	≤ 3.889 m Horiz. ≤ 4.196 m Vert.
Time Transfer Domain Accuracy • ≤ 40 nanoseconds time transfer error 95% of time (SIS only)	• Defined for a time transfer solution meeting the representative user conditions • Standard based on a measurement interval of 24 hours averaged over all points in the service volume.	≤ 9 nanoseconds
Instantaneous UTCOE Integrity • NTE ±120 nanoseconds 99.999% of time without a timely alert (SIS only)	• For any healthy SPS SIS • Worst case for delayed alert is 6 hours	≤ 29.5 nanoseconds
Per-Slot Availability	Conditions and Constraints	
• ≥ 0.957 Probability that a slot in the baseline 24-slot configuration will be occupied by a satellite broadcasting a healthy SPS SIS • ≥ 0.957 Probability that a slot in the expanded configuration will be occupied by a pair of satellites each broadcasting a healthy SPS SIS	• Calculated as an average over all slots in the 24-slot constellation, normalized annually • Applies to satellites broadcasting a healthy SPS SIS that also satisfy the other performance standards in the SPS performance standard.	100% 100%
Constellation Availability	Conditions and Constraints	
• ≥ 0.98 Probability that at least 21 slots out of the 24 will be occupied either by a satellite broadcasting a healthy SPS SIS in the baseline 24-slot configuration or by a pair of satellites each broadcasting a healthy SPS SIS in the expanded slot configuration • ≥ 0.99999 Probability that at least 20 slots out of the 24 will be occupied either by a satellite broadcasting a healthy SPS SIS in the baseline 24-slot configuration or by a pair of satellites each broadcasting a healthy SPS SIS in the expanded slot configuration	• Calculated as an average over all slots in the 24-slot constellation, normalized annually. • Applies to satellites broadcasting a healthy SPS SIS that also satisfies the other performance standards in the SPS performance standard.	100% 100%

2016 08 21	9	0 1 1 2 3 3 3 3	6	0 0 1 1 2 4 1 1	10	0 1 1 1 3 4 3 3
2016 08 22	6	1 1 2 2 3 2 1 1	3	2 1 2 2 0 0 0 0	5	2 1 2 1 1 1 1 1
2016 08 23	12	1 2 1 2 4 2 3 4	24	1 1 0 1 6 5 4 4	18	2 2 1 2 4 3 5 5
2016 08 24	17	5 3 3 3 3 2 2 3	31	4 3 3 6 6 3 2 2	19	5 3 3 3 4 2 2 3
2016 08 25	9	2 1 2 3 2 2 2 3	17	2 2 5 4 4 2 2 2	11	2 1 3 3 2 2 2 3
2016 08 26	5	2 2 0 2 2 1 2 1	6	3 2 0 2 2 2 1	7	3 2 1 1 1 2 2 2
2016 08 27	5	2 2 0 2 2 1 2 0	7	1 3 1 4 2 0 1 0	5	2 3 1 2 1 1 1 0
2016 08 28	4	0 0 1 1 3 1 1 1	6	0 1 0 4 3 0 0 0	3	1 1 1 1 0 1 0
2016 08 29	5	1 0 2 3 1 1 2	6	1 0 0 1 3 3 2 1	6	1 1 0 2 2 2 2 3
2016 08 30	12	3 2 2 3 3 3 3 3	30	2 2 4 3 6 6 3 2	16	3 2 2 2 3 4 4 4
2016 08 31	8	2 1 1 2 2 1 3 3	5	2 1 1 2 1 1 2 2	8	2 2 1 1 2 1 3 3
2016 09 01	29	4 3 5 3 5 2 4 5	52	2 5 7 5 5 5 4 5	36	4 4 5 4 4 3 5 6
2016 09 02	24	5 5 3 3 4 2 2 4	44	5 5 3 6 6 5 3 3	39	6 6 3 3 5 4 3 5
2016 09 03	21	3 4 4 3 4 3 3 4	70	3 5 7 7 6 6 4 4	40	4 6 5 4 4 4 4 5
2016 09 04	20	4 3 4 3 3 3 4 3	46	3 3 7 5 6 4 4 3	28	5 4 4 4 4 4 5 4
2016 09 05	13	2 4 3 2 2 3 3 2	36	3 4 6 5 4 5 4 3	17	3 4 3 2 2 3 5 3
2016 09 06	12	3 3 3 2 2 2 3 3	18	3 3 4 4 4 2 3 2	14	3 3 3 3 2 2 4 2
2016 09 07	8	3 3 1 2 2 2 1 2	25	2 2 1 5 6 5 2 1	12	3 3 1 3 3 3 2 2
2016 09 08	12	3 3 3 3 3 2 2 2	31	2 4 4 6 5 5 2 1	14	3 4 3 3 3 2 2 2
2016 09 09	6	3 1 1 2 1 1 2	1	1 0 0 0 0 0 1 1	5	2 1 1 1 1 1 1 2
2016 09 10	4	1 1 2 1 2 1 1 1	2	1 1 2 1 0 0 1 0	5	1 2 2 1 1 0 1 2
2016 09 11	3	0 0 1 1 2 1 1 1	7	1 0 2 3 3 3 0 0	4	1 0 1 1 2 1 1 1
2016 09 12	6	2 2 2 2 2 2 1 1	3	2 2 1 0 1 0 0 0	6	3 2 1 1 2 1 1 2
2016 09 13	4	2 1 2 1 2 1 0 1	6	1 1 2 4 2 0 0 0	5	2 2 2 2 1 1 0 1
2016 09 14	8	1 2 2 2 3 2 2 2	12	1 1 3 0 5 3 2 2	8	2 2 2 2 3 2 3 2
2016 09 15	6	2 2 2 2 1 2 1 2	9	2 3 4 3 2 1 0 0	7	3 3 2 2 1 1 0 1
2016 09 16	3	0 0 1 1 2 1 2 1	1	0 0 0 0 0 1 1 0	3	0 0 1 1 1 1 2 1
2016 09 17	4	2 0 1 2 2 1 1 1	1	2 0 0 0 0 0 0 0	4	2 1 1 2 1 0 0 1
2016 09 18	8	1 1 2 3 3 2 2 1	17	1 1 1 4 5 5 1 1	9	2 1 2 3 3 2 2 1
2016 09 19	8	1 1 3 2 2 2 2 3	19	1 0 3 5 5 4 1 2	10	2 1 3 2 3 2 2 3
2016 09 20	15	4 3 4 3 2 3 2 1	22	3 4 4 6 2 2 2 2	19	5 4 4 4 2 3 2 2
2016 09 21	9	4 2 2 3 1 1 1 1	12	2 2 4 5 2 0 0 1	10	4 3 2 3 1 0 1 1
2016 09 22	4	2 0 2 1 1 2 2 0	5	1 1 4 1 0 0 0 0	4	2 1 2 1 0 0 0 0
2016 09 23	3	0 1 1 1 1 1 1 1	0	0 1 0 0 0 0 0 0	4	1 1 2 1 0 1 1 1
2016 09 24	4	1 0 0 1 2 2 1 2	2	1 0 0 1 0 0 1 1	5	1 0 1 1 1 1 2 2
2016 09 25	12	3 3 1 2 1 2 4 3	17	3 4 1 5 3 2 3 2	23	4 5 1 3 3 3 5 4
2016 09 26	18	3 4 3 3 3 3 3 4	33	2 3 4 6 5 5 4 3	22	4 4 3 3 4 3 4 4
2016 09 27	21	4 3 3 4 3 5 2 3	64	5 4 5 7 7 6 3 3	38	5 4 5 5 4 6 3 4
2016 09 28	24	4 4 4 1 3 4 5 3	58	5 4 4 7 5 6 6 3	42	5 5 3 5 4 5 6 4
2016 09 29	22	4 4 4 4 3 4 3 2	73	3 4 7 7 6 7 4 3	39	4 5 5 5 4 5 4 3
2016 09 30	15	4 3 3 3 2 3 3 2	33	3 3 5 6 4 4 5 1	6	4 4 4 4 3 3 5 2

10.3 Appendix C: Performance Analysis (PAN) Problem Report

In 1993, the FAA began monitoring and analyzing Global Positioning System (GPS) Standard Positioning Service (SPS) performance data. At present, the FAA has approved GPS for IFR and is developing WAAS as a GPS augmentation system. In order to ensure the safe and effective use of GPS and its augmentation systems within the NAS, it is critical that characteristics of GPS performance as well as specific causes for service outages be monitored and understood. To accomplish this objective, GPS SPS performance data is documented in a quarterly GPS Performance Analysis (PAN) report. The PAN report contains data collected at various National Satellite Test Bed (NSTB) and Wide Area Augmentation System (WAAS) reference station locations. This PAN Problem Report will be issued only when the performance data fails to meet the GPS Standard Positioning Service (SPS) Signal Specification.

Problem Description:

There were no problems this quarter.

10.4 Appendix D: Glossary

The terms and definitions discussed below are taken from the Standard Positioning Service Performance Specification (September 2008). An understanding of these terms and definitions is a necessary prerequisite to full understanding of the Signal Specification.

General Terms and Definitions

Almanac Longitude of the Ascending Node (.o): Equatorial angle from the Prime Meridian (Greenwich) at the weekly epoch to the ascending node at the ephemeris reference epoch.

Coarse/Acquisition (C/A) Code: A PRN code sequence used to modulate the GPS L1 carrier.

Corrected Longitude of Ascending Node (Ω_k) and Geographic Longitude of the Ascending Node (GLAN): Equatorial angle from the Prime Meridian (Greenwich) to the ascending node, both at arbitrary time T_k .

Dilution of Precision (DOP): The magnifying effect on GPS position error induced by mapping GPS ranging errors into position within the specified coordinate system through the geometry of the position solution. The DOP varies as a function of satellite positions relative to user position. The DOP may be represented in any user local coordinate desired. Examples are HDOP for local horizontal, VDOP for local vertical, PDOP for all three coordinates, and TDOP for time.

Equatorial Angle: An angle along the equator in the direction of Earth rotation.

Geometric Range: The difference between the estimated locations of a GPS satellite and an SPS receiver.

Ground track Equatorial Crossing (GEC, λ , 2 SOPS GLAN): Equatorial angle from the Prime Meridian (Greenwich) to the location a ground track intersects the equator when crossing from the Southern to the Northern hemisphere. GEC is equal to Ω_k when the argument of latitude (Φ) is zero.

Instantaneous User Range Error (URE): The difference between the pseudo range measured at a given location and the expected pseudo range, as derived from the navigation message and the true user position, neglecting the bias in receiver clock relative to GPS time. A signal-in-space (SIS) URE includes residual orbit, satellite clock, and group delay errors. A system URE (sometimes known as a User Equivalent Range Error, or UERE) contains all line-of-sight error sources, to include SIS, single-frequency ionosphere model error, troposphere model error, multipath and receiver noise.

Longitude of Ascending Node (LAN): A general term for the location of the ascending node – the point that an orbit intersects the equator when crossing from the Southern to the Northern hemisphere.

Longitude of the Ground track Equatorial Crossing (GEC, λ , 2 SOPS GLAN): Equatorial angle from the Prime Meridian (Greenwich) to the location a ground track intersects the equator when crossing from the Southern to the Northern hemisphere. GEC is equal to Ω_k when the argument of latitude (Φ) is zero.

Mean Down Time (MDT): A measure of time required to restore function after any downing event.

Mean Time Between Downing Events (MTBDE): A measure of time between any downing events.

Mean Time Between Failures (MTBF): A measure of time between unscheduled downing events.

Mean Time to Restore (MTTR): A measure of time required to restore function after an unscheduled downing event.

Navigation Message: Data contained in each satellite's ranging signal and consisting of the ranging signal time-of-transmission, the transmitting satellite's orbital elements, an almanac containing abbreviated orbital element

information to support satellite selection, ranging measurement correction information, and status flags. The message structure is described in Section 2.1.2 of the SPS Performance Standard.

Operational Satellite: A GPS satellite which is capable of, but is not necessarily transmitting a usable ranging signal.

PDOP Availability: Defined to be the percentage of time over any 24-hour interval that the PDOP value is less than or equal to its threshold for any point within the service volume.

Positioning Accuracy: Defined to be the statistical difference, at a 95% probability, between position measurements and a surveyed benchmark for any point within the service volume over any 24-hour interval.

- **Horizontal Positioning Accuracy:** Defined to be the statistical difference, at a 95% probability, between horizontal position measurements and a surveyed benchmark for any point within the service volume over any 24-hour interval.
- **Vertical Positioning Accuracy:** Defined to be the statistical difference, at a 95% probability, between vertical position measurements and a surveyed benchmark for any point within the service volume over any 24-hour interval.

Position Solution: An estimate of a user's location derived from ranging signal measurements and navigation data from GPS.

Position Solution Geometry: The set of direction cosines that define the instantaneous relationship of each satellite's ranging signal vector to each of the position solution coordinate axes.

Pseudo Random Noise (PRN): A binary sequence that appears to be random over a specified time interval unless the shift register configuration and initial conditions for generating the sequence are known. Each satellite generates a unique PRN sequence that is effectively uncorrelated (orthogonal) to any other satellite's code over the integration time constant of a receiver's code tracking loop.

Representative SPS Receiver: The minimum signal reception and processing assumptions employed by the U.S. Government to characterize SPS performance in accordance with performance standards defined in Section 3 of the SPS Performance Standard. Representative SPS receiver capability assumptions are identified in Section 2.2 of the SPS Performance Standard.

Right Ascension of Ascending Node (RAAN): Equatorial angle from the celestial principal direction to the ascending node.

Root Mean Square (RMS) SIS URE: A statistic that represents instantaneous SIS URE performance in an RMS sense over some sample interval. The statistic can be for an individual satellite or for the entire constellation. The sample interval for URE assessment used in the SPS Performance Standard is 24 hours.

Selective Availability: Protection technique formerly employed to deny full system accuracy to unauthorized users. SA was discontinued effective midnight May 1, 2000.

Service Availability: Defined to be the percentage of time over any 24-hour interval that the predicted 95% positioning error is less than its threshold for any given point within the service volume.

- **Horizontal Service Availability:** Defined to be the percentage of time over any 24-hour interval that the predicted 95% horizontal error is less than its threshold for any point within the service volume.
- **Vertical Service Availability:** Defined to be the percentage of time over any 24-hour interval that the predicted 95% vertical error is less than its threshold for any point within the service volume.

Service Degradation: A condition over a time interval during which one or more SPS performance standards are not supported.

Service Failure: A condition over a time interval during which a healthy GPS satellite's ranging signal exceeds the Not-to-Exceed (NTE) SPS SIS URE tolerance.

Service Reliability: The percentage of time over a specified time interval that the instantaneous SIS SPS URE is maintained within a specified reliability threshold at any given point within the service volume, for all healthy GPS satellites.

Service Volume: The spatial volume supported by SPS performance standards. Specifically, the SPS Performance Standard supports the terrestrial service volume. The terrestrial service volume covers from the surface of the Earth up to an altitude of 3,000 kilometers.

SPS Performance Envelope: The range of nominal variation in specified aspects of SPS performance.

SPS Performance Standard: A quantifiable minimum level for a specified aspect of GPS SPS performance. SPS performance standards are defined in Section 3.0.

SPS Ranging Signal: An electromagnetic signal originating from an operational satellite. The SPS ranging signal consists of a Pseudo Random Noise (PRN) C/A code, a timing reference and sufficient data to support the position solution generation process. A description of the GPS SPS signal is provided in Section 2. The formal definition of the SPS ranging signal is provided in ICD IS-GPS-200G.

SPS Ranging Signal Measurement: The difference between the ranging signal time of reception (as determined by the receiver's clock) and the time of transmission derived from the navigation signal (as defined by the satellite's clock) multiplied by the speed of light. Also known as the *pseudo range*.

SPS SIS User Range Error (URE) Statistic:

- A satellite SPS SIS URE statistic is defined to be the Root Mean Square (RMS) difference between SPS ranging signal measurements (neglecting user clock bias and errors due to propagation environment and receiver), and “true” ranges between the satellite and an SPS user at any point within the service volume over a specified time interval.
- A constellation SPS SIS URE statistic is defined to be the average of all satellite SPS SIS URE statistics over a specified time interval.

Time Transfer Accuracy Relative to UTC (USNO): The difference at a 95% probability between user UTC time estimates and UTC (USNO) at any point within the service volume over any 24-hour interval.

Transient Behavior: Short-term behavior not consistent with steady-state expectations.

Usable SPS Ranging Signal: An SPS ranging signal that can be received, processed, and used in a position solution by a receiver with representative SPS receiver capabilities.

User Navigation Error (UNE): Given a sufficiently stationary and ergodic satellite constellation ranging error behavior over a minimum sample interval, multiplication of the DOP and a constellation ranging error standard deviation value will yield an approximation of the RMS position error. This RMS approximation is known as the UNE (UHNE for horizontal, UVNE for vertical, and so on). The user is cautioned that any divergence away from the stationary and ergodic assumptions will cause the UNE to diverge from a RMS value based on actual measurements.

User Range Accuracy (URA): A conservative representation of each satellite's expected (1σ) SIS URE performance (excluding residual group delay) based on historical data. A URA value is provided that is representative over the curve fit interval of the navigation data from which the URA is read. The URA is a coarse representation of the URE statistic in that it is quantized to levels represented in ICD IS-GPS-200G.

11 GPS Broadcast Orbit Versus NGA Precise Orbits and URA (IAURA) Bounding Analyses

As part of the WAAS off-line monitoring process, the accuracy of the GPS broadcast ephemeris is periodically compared to the NGA precise orbit information to monitor the validity of an a priori assumption concerning the accuracy of the GPS broadcast ephemeris information. That a priori assumption is part of a brute force computer simulation analysis utilized as part of the safety proof of the WAAS MT-28 functionality. That brute force analysis searches a simulated error sphere around a GPS satellite for a worst-case projection of post correction ephemeris error to any user. A pessimistic extrapolation of historical data was used as an a priori to limit the radius of the searched sphere to a finite distance. This periodic off-line monitoring verifies that the original logic of the a priori assumption remains sound.

The assumption being validated is:

Height Error:	+/- 15 meters (standard deviation < 2.8 m),
Along Track Error:	+/- 65 meters (standard deviation < 12.2 m)
Cross Track Error:	+/- 30 meters (standard deviation < 5.6 m)

C/A Nav data URA bounding and L2C CNAV IAURA bounding performance are also evaluated.

For C/A Nav data, all IGS high rate 15 minute broadcast navigation data RINEX format files are downloaded and merged into 24 hour broadcast navigation data files which are then added to RINEX nav data files from all WAAS peripheral reference stations. A majority voting algorithm is used to screen the navigation data after a LSB recovery algorithm is applied. NGA APC precise ephemeris referenced to the GPS satellite antenna phase center is downloaded from the NGA site. GPS satellite positions are computed every 15 minutes and differenced with the precise orbits. The resulting error information is then segregated into the Height, Along Track, and Cross Track (HAC) error data. The standard deviation of those errors is then computed for each dimension for each satellite. Figures 11-1.1 through 11-1.4 show the standard deviation results.

The assumption is valid if a 5.33 scaling of the standard deviation across all satellites is within the a priori. Three months of data from 7/1/16 to 9/30/16 is presented. Only data points where GPS is healthy and valid precise data is available are considered. There was maintenance on PRN-3 on 7/3/16, PRN-29 on 7/8/16, PRN-16 on 7/15/16 and on 7/19/16-7/20/16, PRN-26 on 7/22/16, PRN-24 on 7/24/16, PRN-9 on 7/29/16, PRN-30 on 8/16/16, PRN-31 on 8/18/16-8/19/16, PRN-8 on 8/26/16, and PRN-1 on 9/1/16. Figure 11-2 shows the availability of C/A Nav data. There were no points where GPS was healthy and the NGA data was missing. There are no points where GPS C/A GPS Nav data is unavailable other than during NANUs.

For L2C CNAV data, raw 300 bit L2C and L5 CNAV message data is obtained from the WAAS G3 test receivers located at the WAAS ZAU reference station. Those receivers are located at the Chicago ARTCC in Aurora IL. CNAV data was only available while the satellites were in view of Chicago. This is the reason for the sparseness in the CNAV data. Because of the sparseness of the data, CNAV data from rising and setting satellites was used for the entire 3 hour fit interval, even though on rising and setting satellites there would have normally been an ephemeris set update at the 2 hour points. Those missing updates may or may not have provided improvement to the

accuracy. L2C is used because there are more L2C capable satellites than L5 capable satellites. Data for 7/8/16-7/10/16 and 09/22/16 was missing for the quarter.

The sign convention for this analysis is error = broadcast ECEF - precise ECEF. Along track is positive in the direction of the velocity vector. Cross track completes a right hand system with height and along track.

Figures 11-4.1 and 11-4.2 are URA (IAURA) over bounding plots. URA bounding using C/A Nav data used the maximum of the range indicated by the broadcast URA index. IAURA bounding using CNAV data used the algorithm from IS-GPS-200 / IS-GPS-705. The error used in the analysis is at the location of maximum error in the footprint (usually edge of coverage). Review of the bounding plots, the QQ plots, and the histograms indicates that CNAV data is not as conservative as using the max URA from the C/A Nav data. The CNAV over bounding plot does not pass. Sparseness of data may have contributed to the failure to over bound. (i.e. using the full 3 hour fit interval at the beginning and end of tracks)

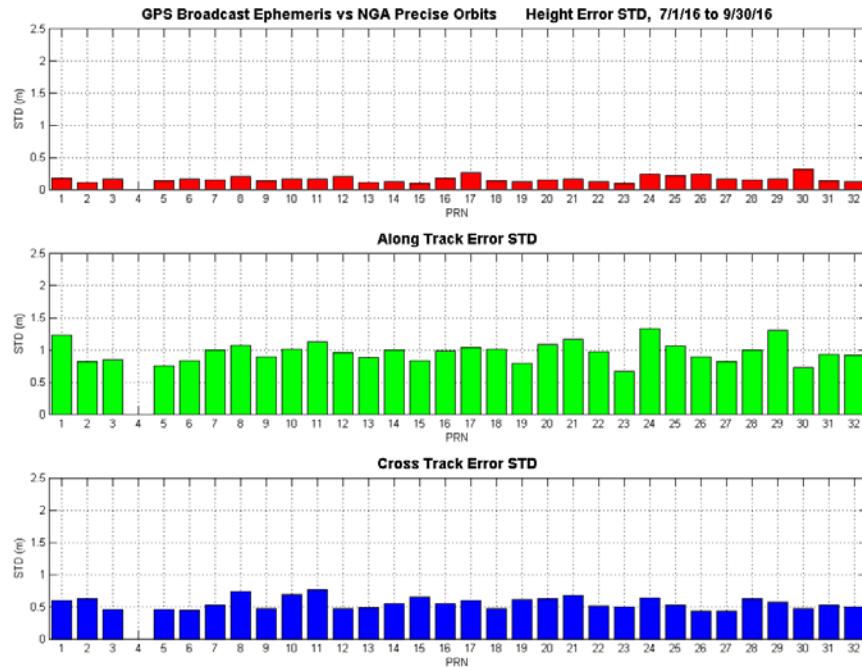
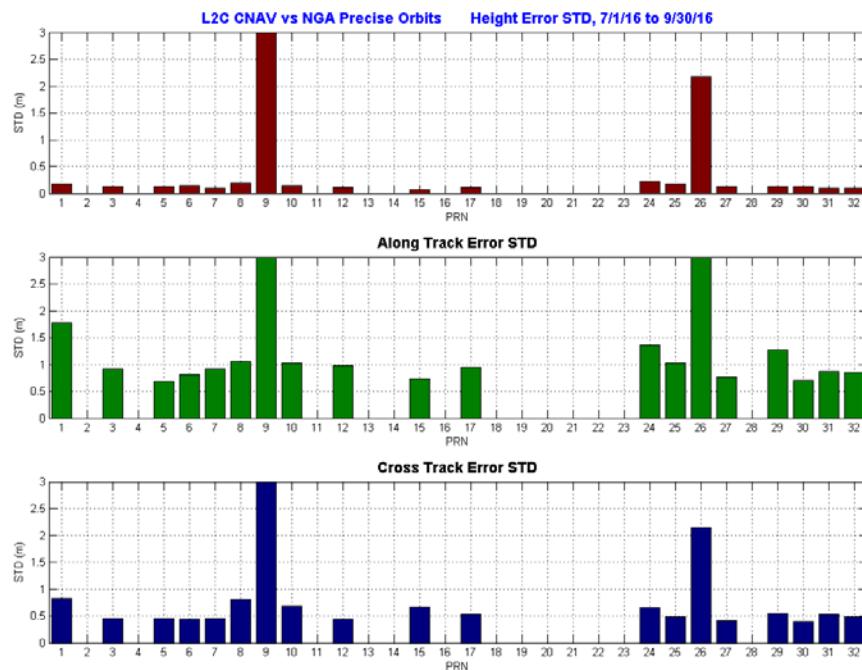
Figures 11-5.1 thru 11-5.50 are plots of the height, along track, and cross track error relative to NGA precise orbits by PRN number. These plots do not include clock error.

Figures 11-6.1 thru 11-6.13 are QQ plots of the URA (IAURA) normalized total range error (height, along track, cross track, and clock) projected onto the surface of the earth. +/- 13.9° from the bore sight of the satellite is used to approximate the surface of the earth. The max URA of the broadcast URA index range is used for the C/A Nav data, IAURA is used for the CNAV data. The range of the QQ plot axis has been fixed at +/- 5. Annotations are provided for any instances beyond that range.

Errors larger than 3 times URA (IAURA) for C/A and 4 times URA (IURA) for CNAV were investigated.

Figures 11-7.1 thru 11-7.50 are histograms of the height error, along track error, cross track error, and URA (IAURA) normalized range error.

Figures 11-8.1 thru 11-8.50 are the timelines of the URA (IAURA) normalized range error. Missing data point are in red and are NANUs for the C/A data. The large number of red points in the CNAV data is the points where the satellites are out of view of ZAU.

Figure 11-1 GPS Broadcast Orbit Accuracy Standard Deviation Plots**Figure 11-1.1, GPS Broadcast Orbit Accuracy Standard Deviations Using C/A Nav Data****Figure 11-1.2, GPS Broadcast Orbit Accuracy Standard Deviations Using L2C CNAV Data**

07/29 PRN-9

-3431.57 Height Error

after Delta V

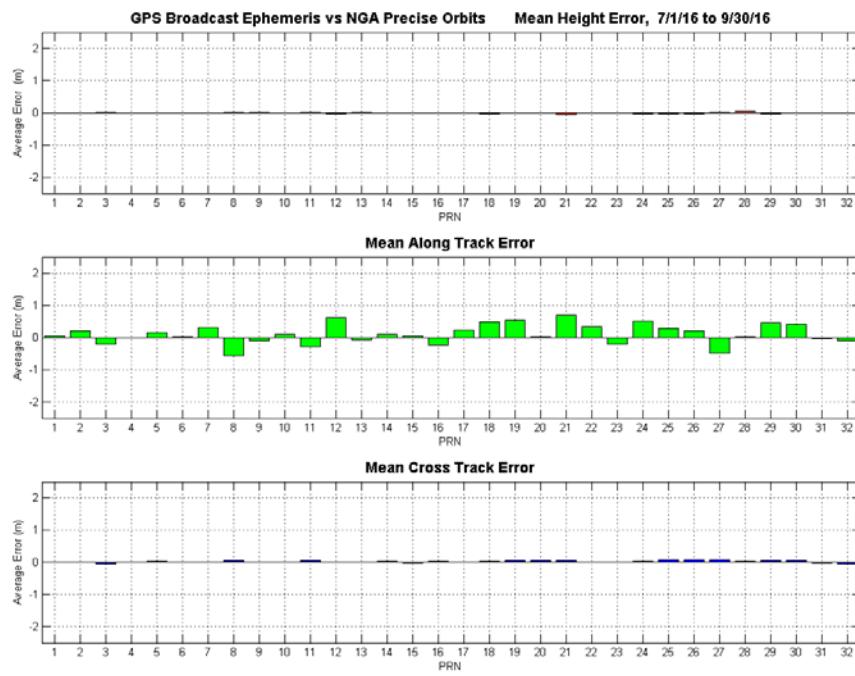
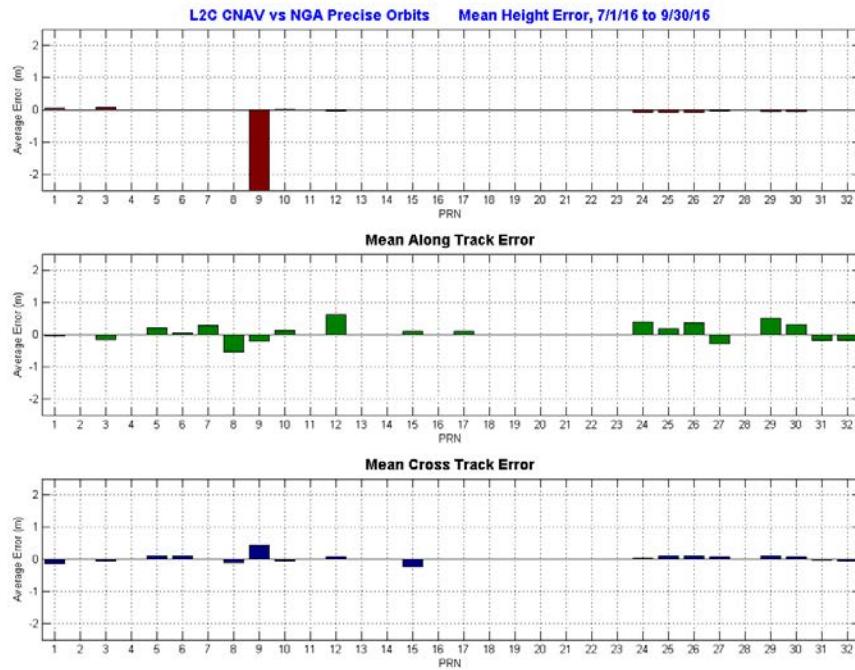
NANU 2016050

07/22 PRN-26

132.83 Height Error

after Delta V

NANU 2016048

Figure 11-1.3, GPS Broadcast Orbit Error Means Using C/A Nav Data**Figure 11-1.4, GPS Broadcast Orbit Error Means Using L2C CNAV Data**

07/29 PRN-9

-3431.57 Height Error

after Delta V

NANU 2016050

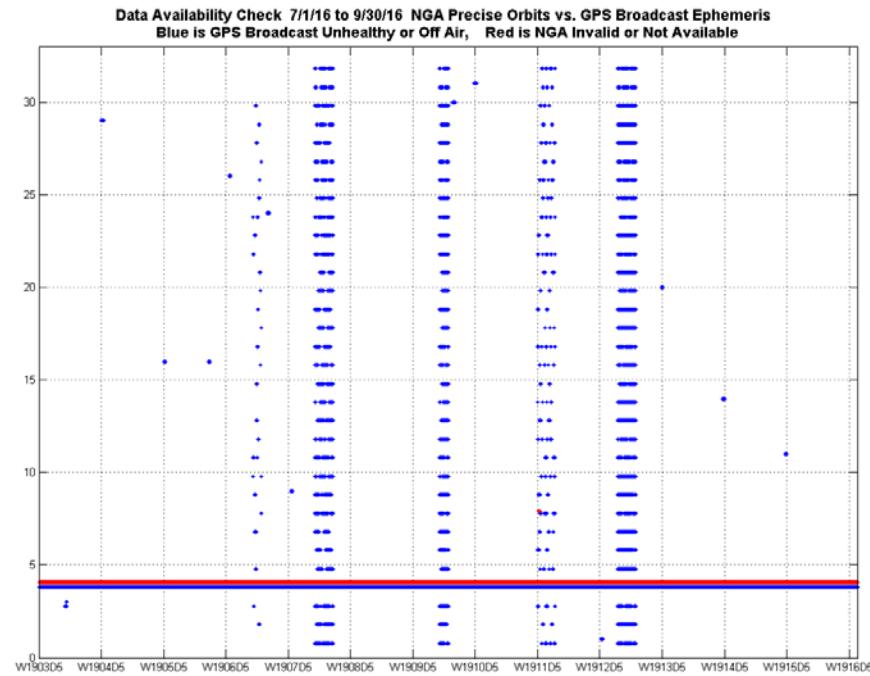
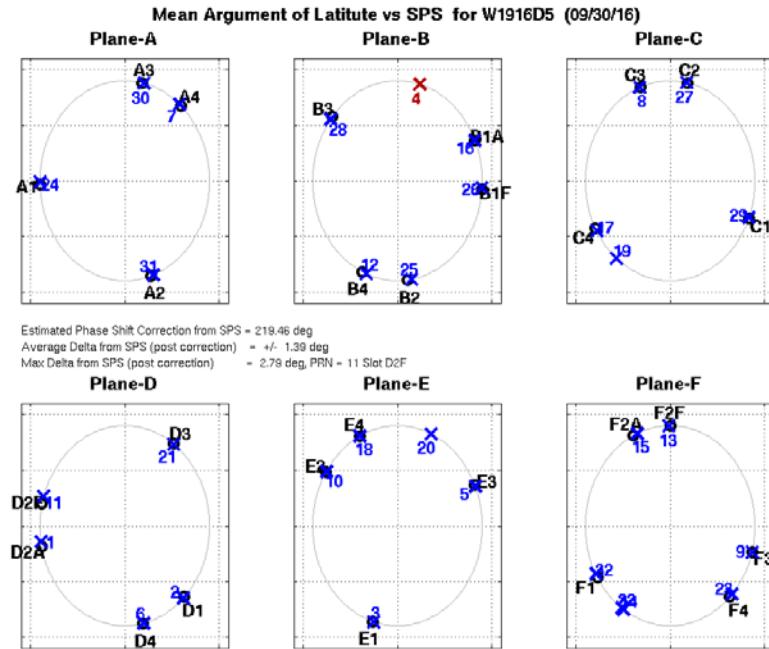
Figure 11-2 Broadcast Ephemeris vs. NGA Precise Data Availability Plots**Figure 11-3 Current GPS Constellation**

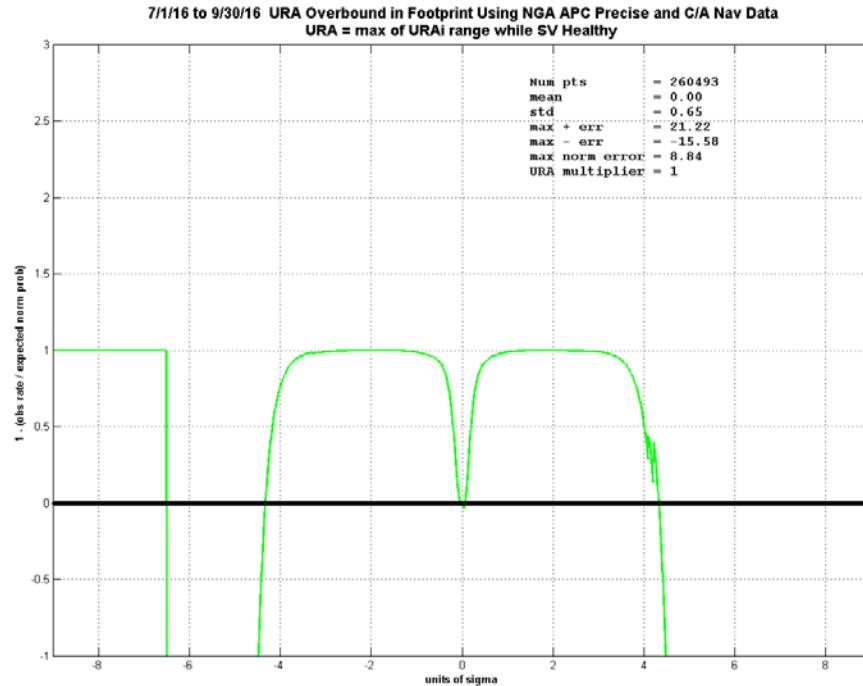
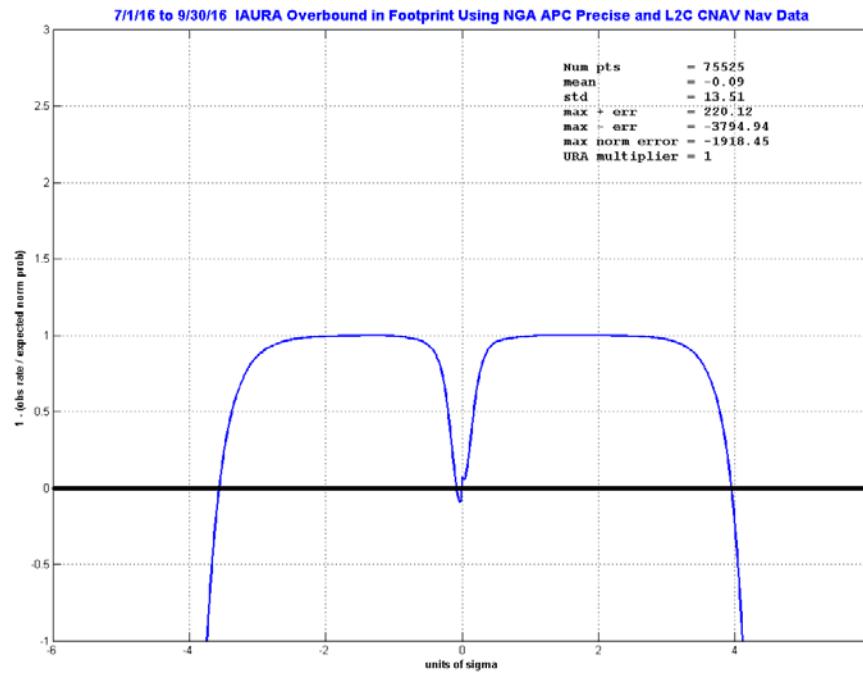
Figure 11-4 URA Over-Bounding Plots**Figure 11-4.1, 4/1/16 to 6/30/16 URA Over-bounding Using C/A Nav Data****Figure 11-4.2, 4/1/16 to 6/30/16 IAURA Over-bounding Using L2C CNAV Data**

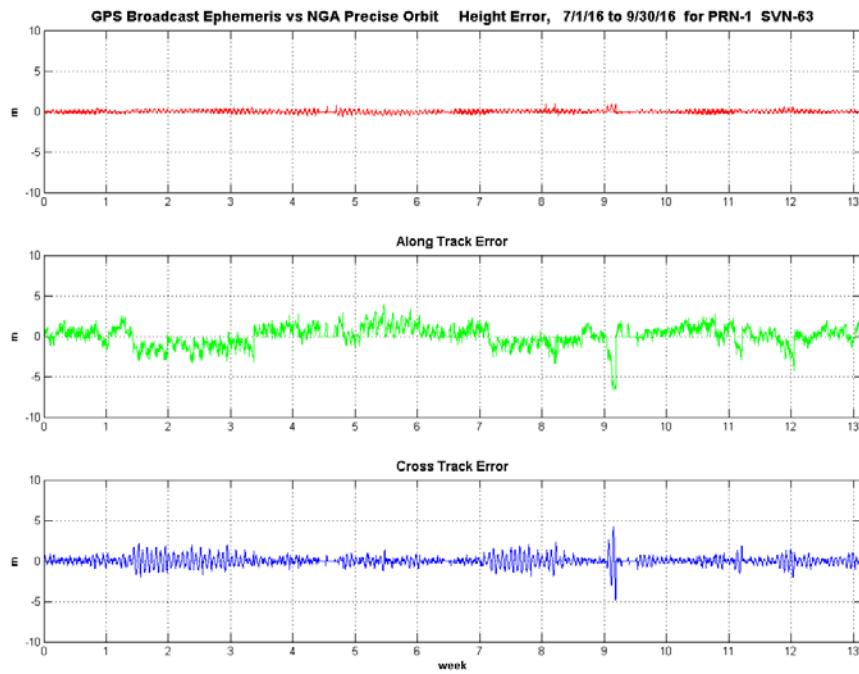
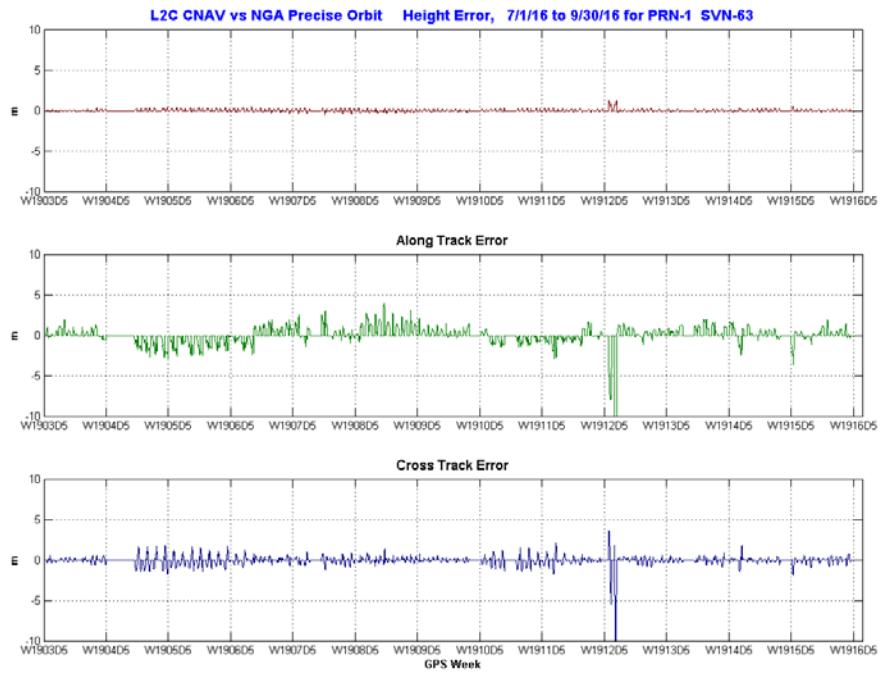
Figure 11-5 Orbit Error Plots For All Satellites**Figure 11-5.1, Orbit Error PRN-1 (SVN-63) Using C/A Nav Data****Figure 11-5.2, Orbit Error PRN-1 (SVN-63) Using L2C CNAV Data**

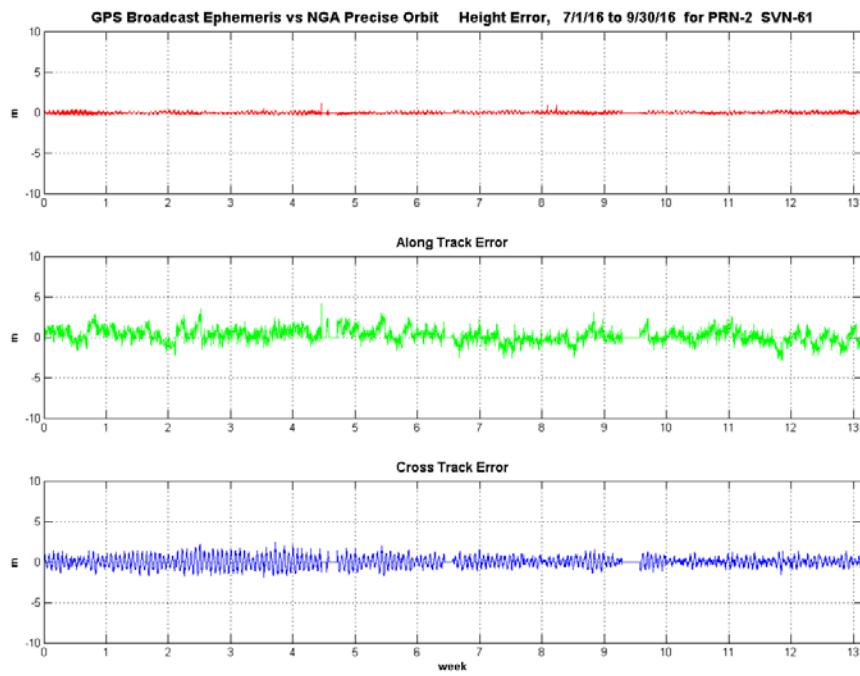
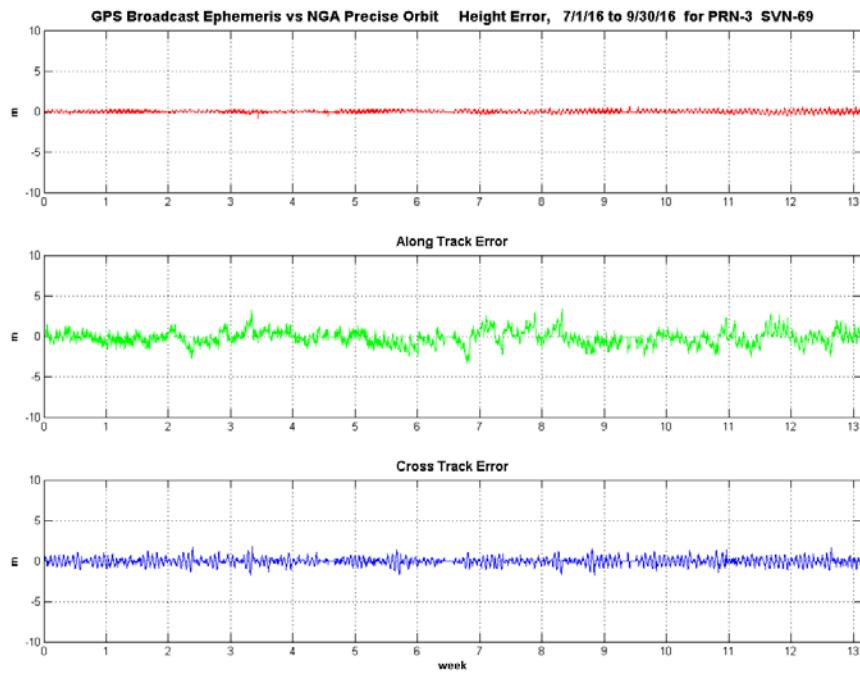
Figure 11-5.3, Orbit Error PRN-2 (SVN-61) Using C/A Nav Data**Figure 11-5.4, Orbit Error PRN-3 (SVN-69) Using C/A Nav Data**

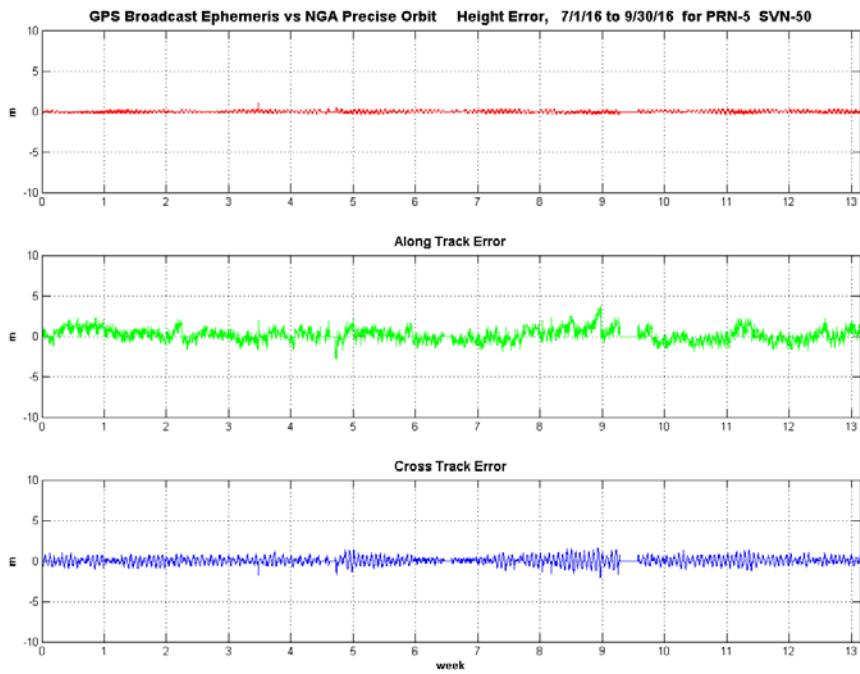
Figure 11-5.5, Orbit Error PRN-3 (SVN-69) Using L2C CNAV Data**Figure 11-5.6, Orbit Error PRN-5 (SVN-50) Using C/A Nav Data**

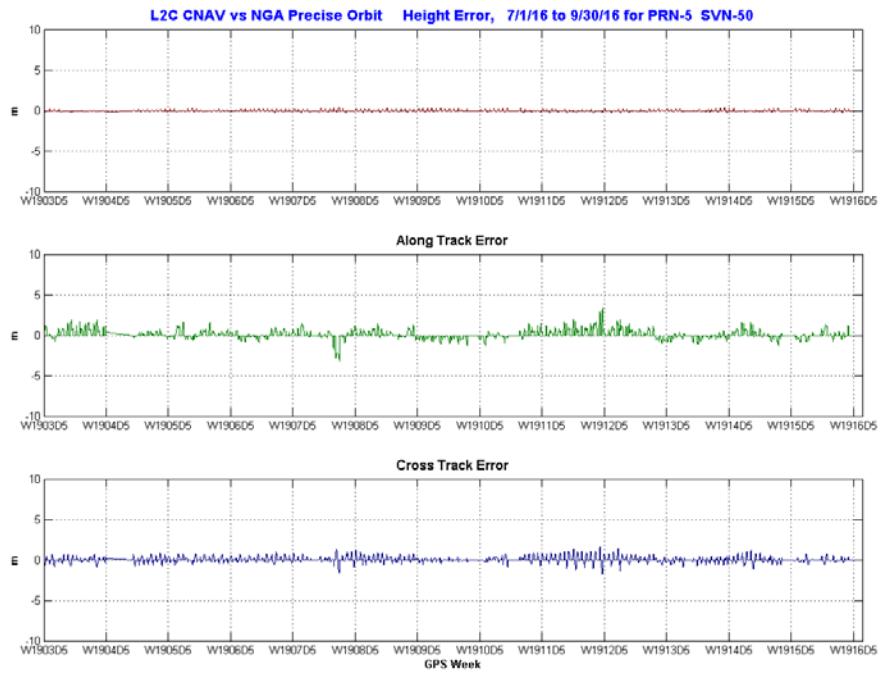
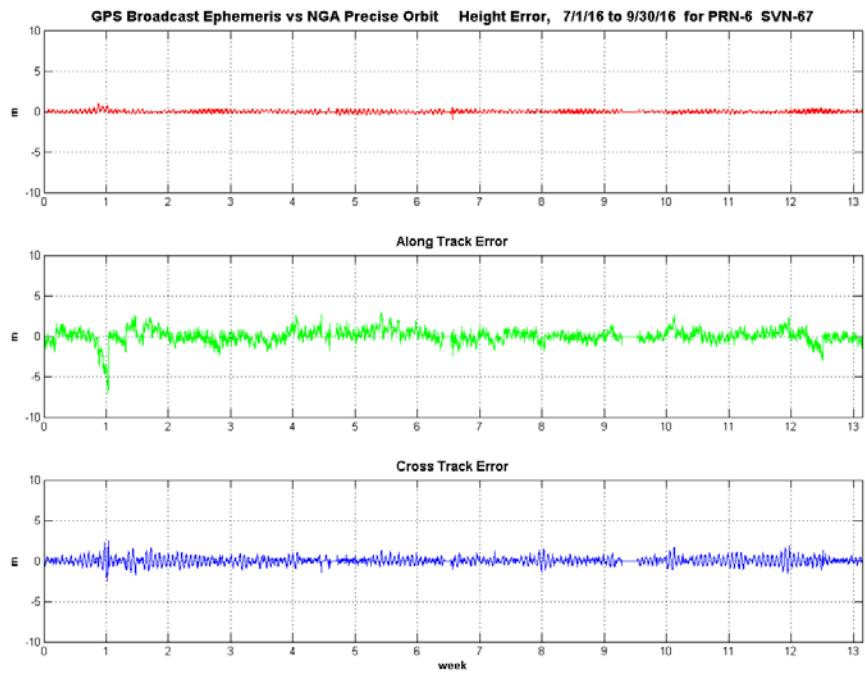
Figure 11-5.7, Orbit Error PRN-5 (SVN-50) Using L2C CNAV Data**Figure 11-5.8, Orbit Error PRN-6 (SVN-67) Using C/A Nav Data**

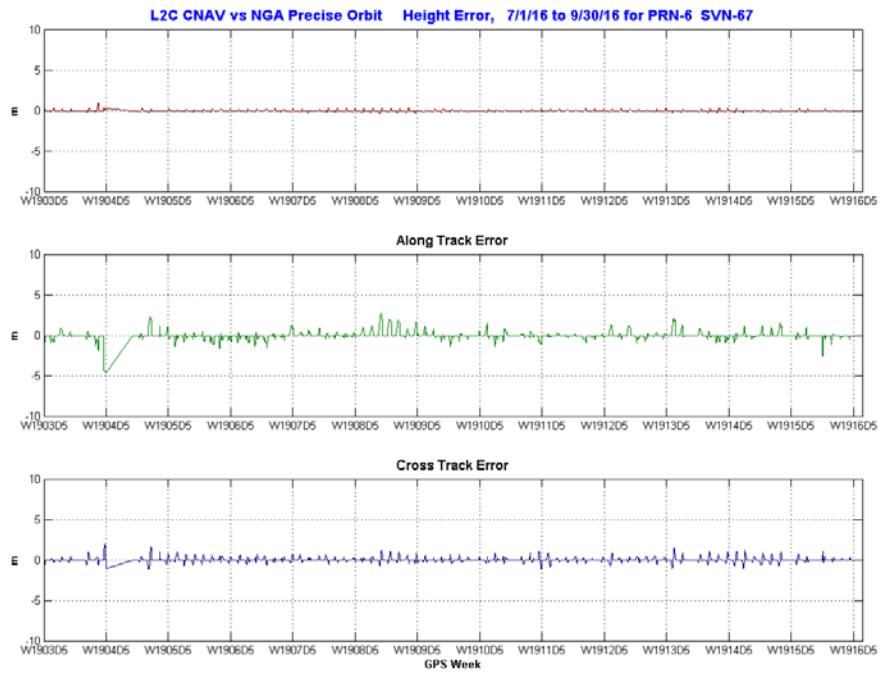
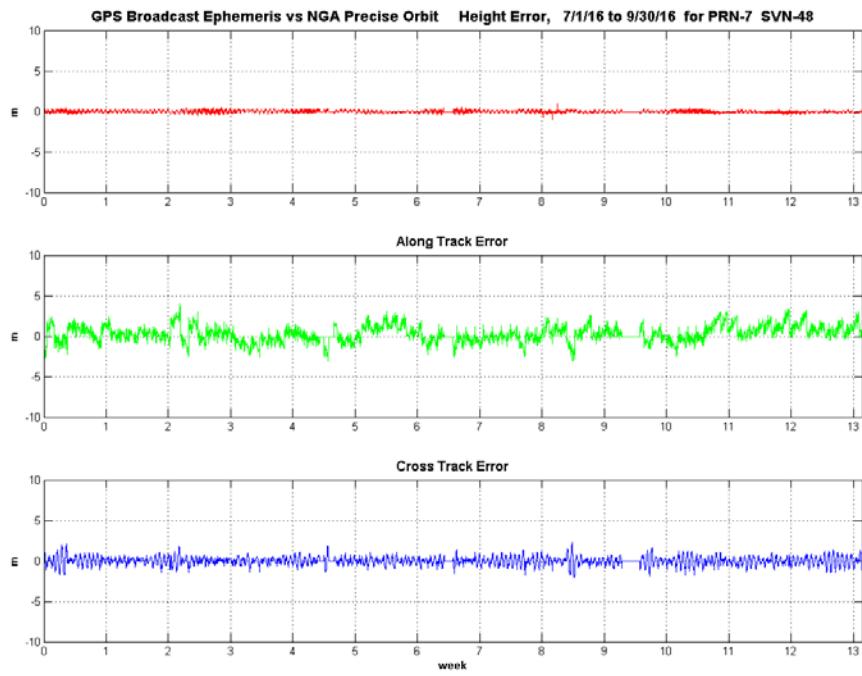
Figure 11-5.9, Orbit Error PRN-6 (SVN-67) Using L2C CNAV Data**Figure 11-5.10, Orbit Error PRN-7 (SVN-48) Using C/A Nav Data**

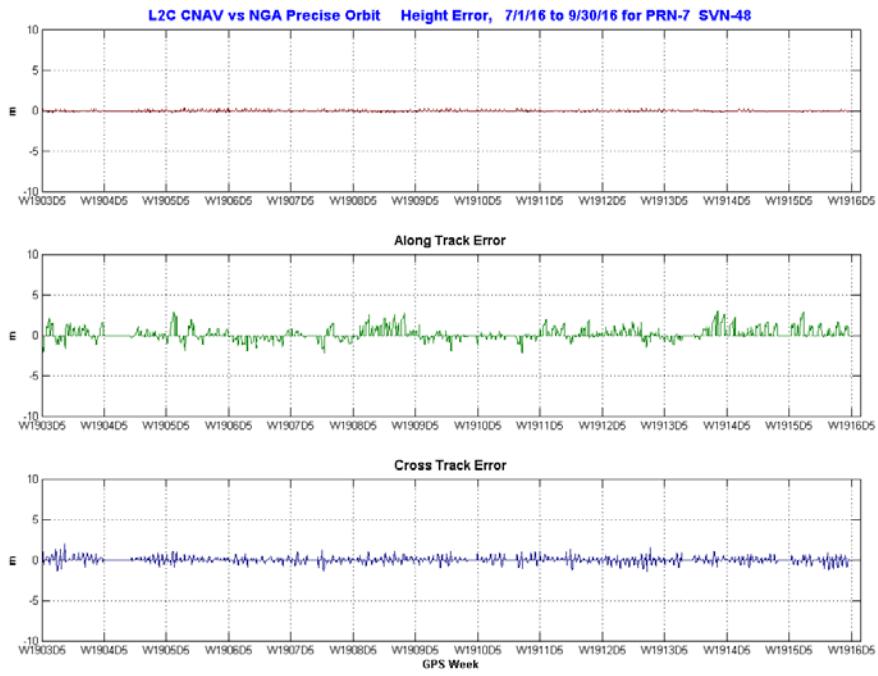
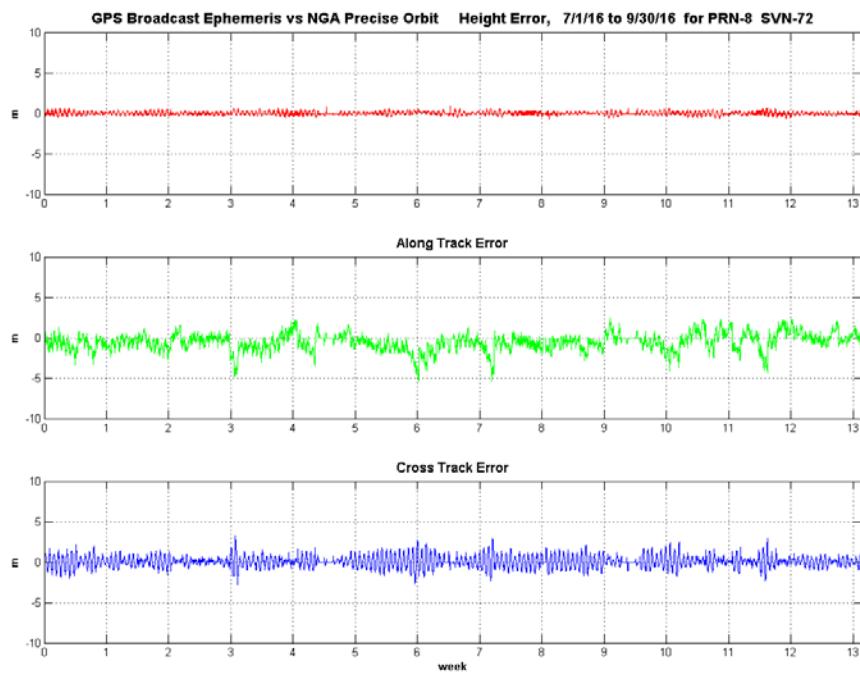
Figure 11-5.11, Orbit Error PRN-7 (SVN-48) Using L2C CNAV Data**Figure 11-5.12, Orbit Error PRN-8 (SVN-72) Using C/A Nav Data**

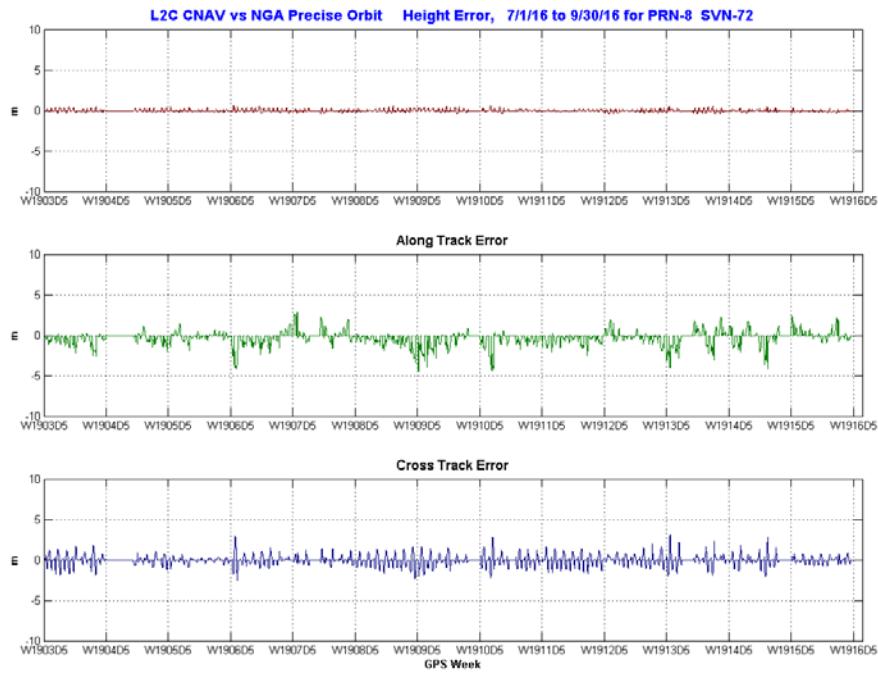
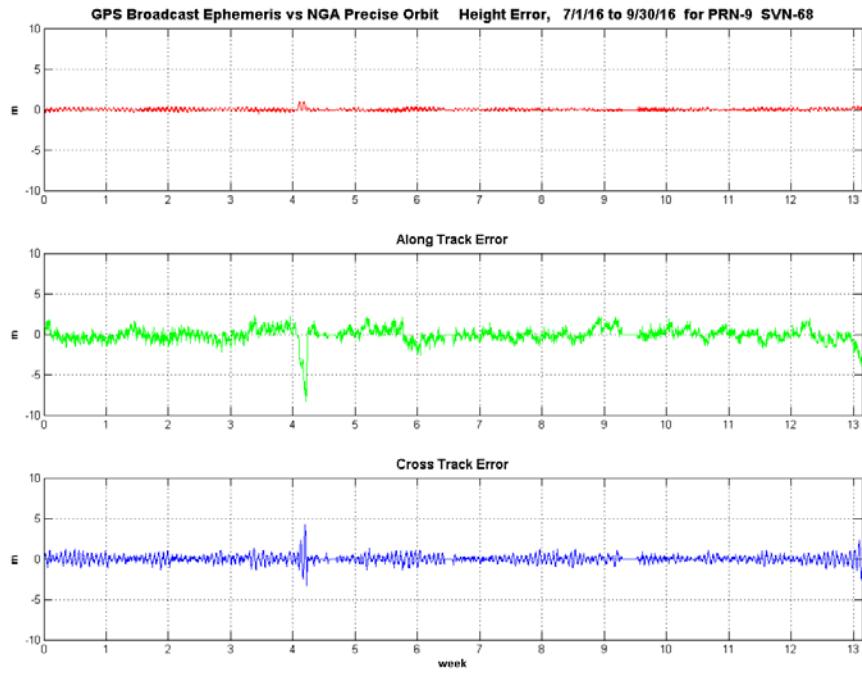
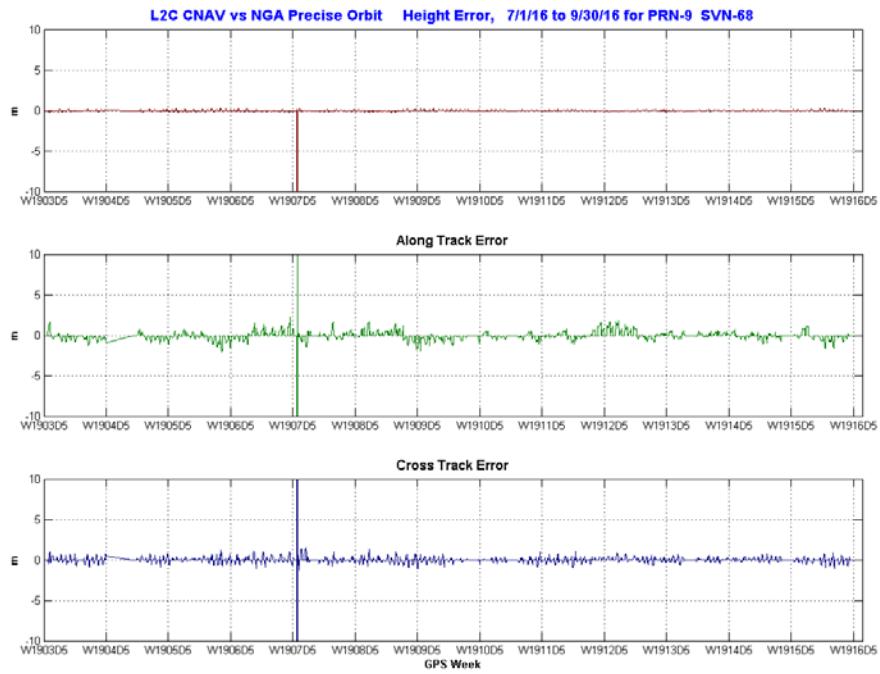
Figure 11-5.13, Orbit Error PRN-8 (SVN-72) Using L2C CNAV Data**Figure 11-5.14, Orbit Error PRN-9 (SVN-68) Using C/A Nav Data**

Figure 11-5.15, Orbit Error PRN-9 (SVN-68) Using L2C CNAV Data

07/29 PRN-9
-3431.57 Height Error
after Delta V
NANU 2016050

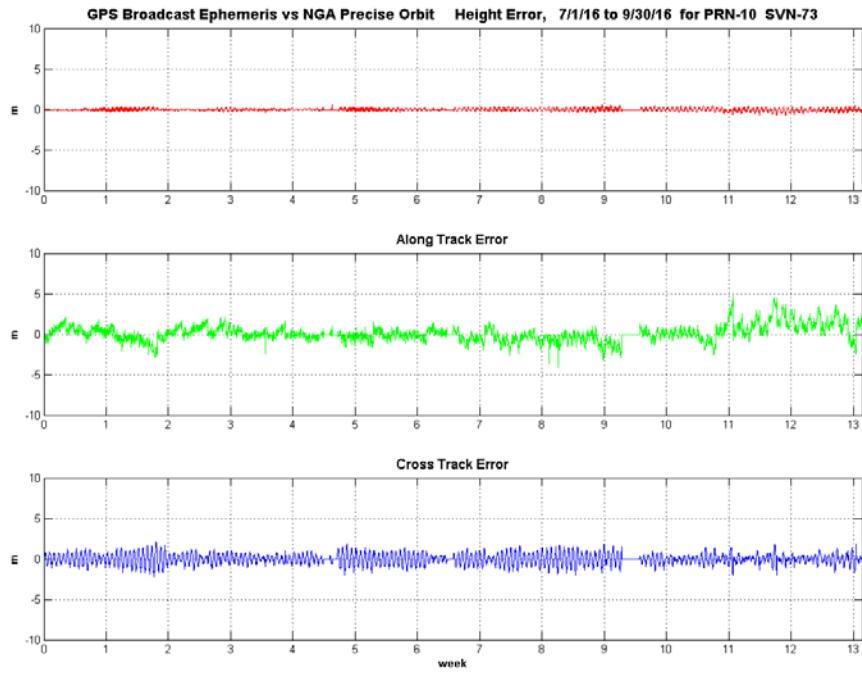
Figure 11-5.16, Orbit Error PRN-10 (SVN-73) Using C/A Nav Data

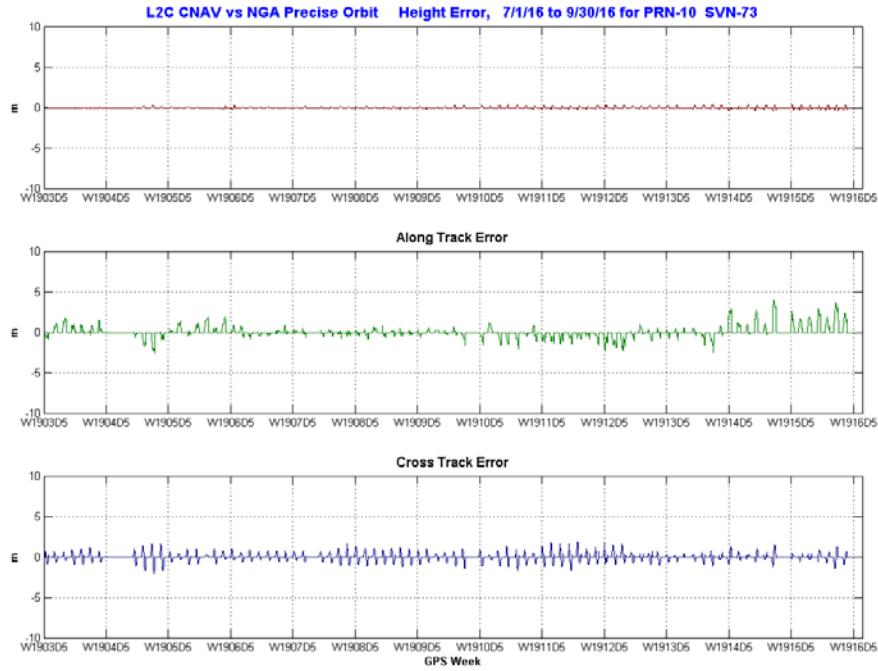
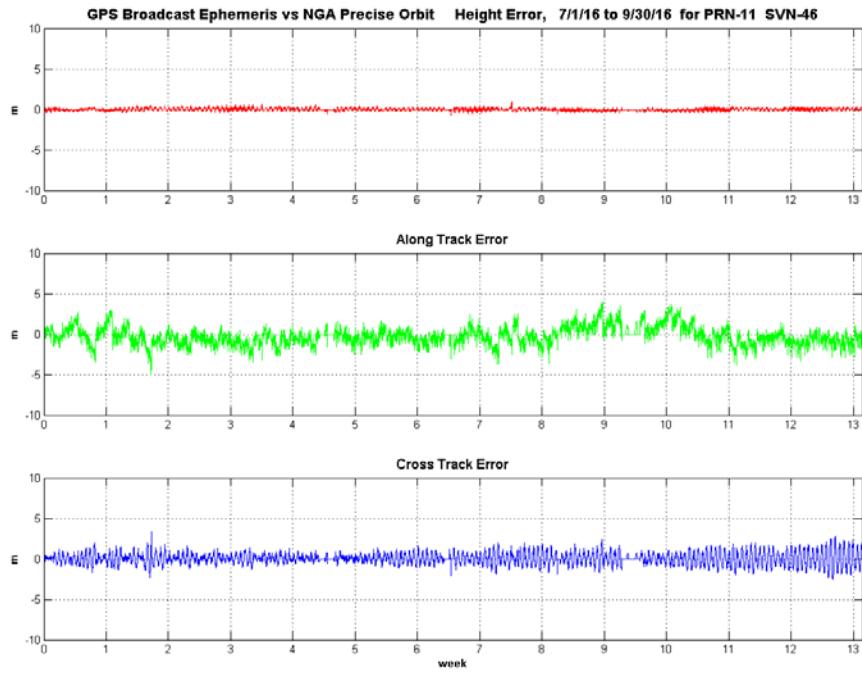
Figure 11-5.17, Orbit Error PRN-10 (SVN-73) Using L2C CNAV Data**Figure 11-5.18, Orbit Error PRN-11 (SVN-46) Using C/A Nav Data**

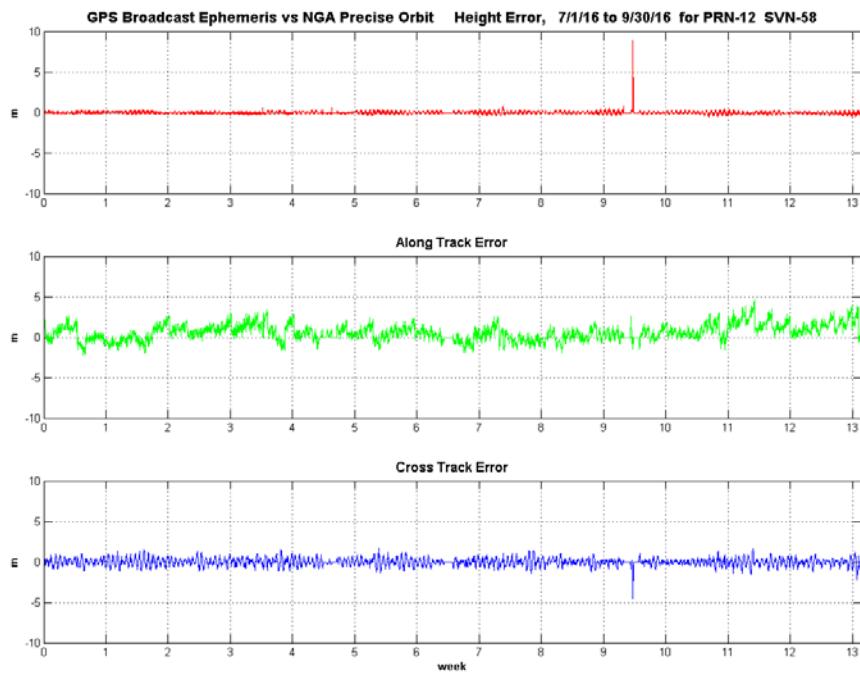
Figure 11-5.19, Orbit Error PRN-12 (SVN-58) Using C/A Nav Data**Figure 11-5.20, Orbit Error PRN-12 (SVN-58) Using L2C CNAV Data**

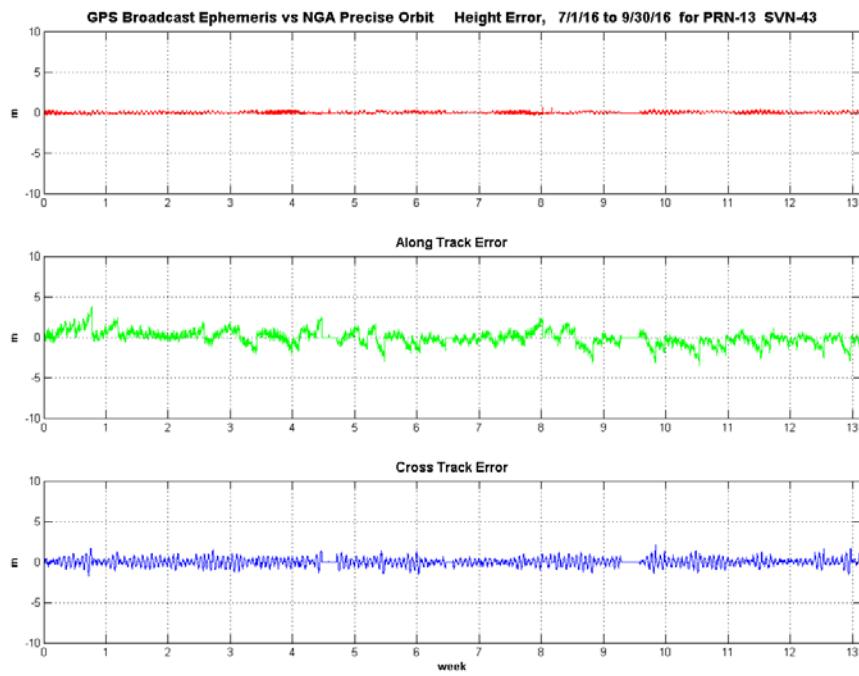
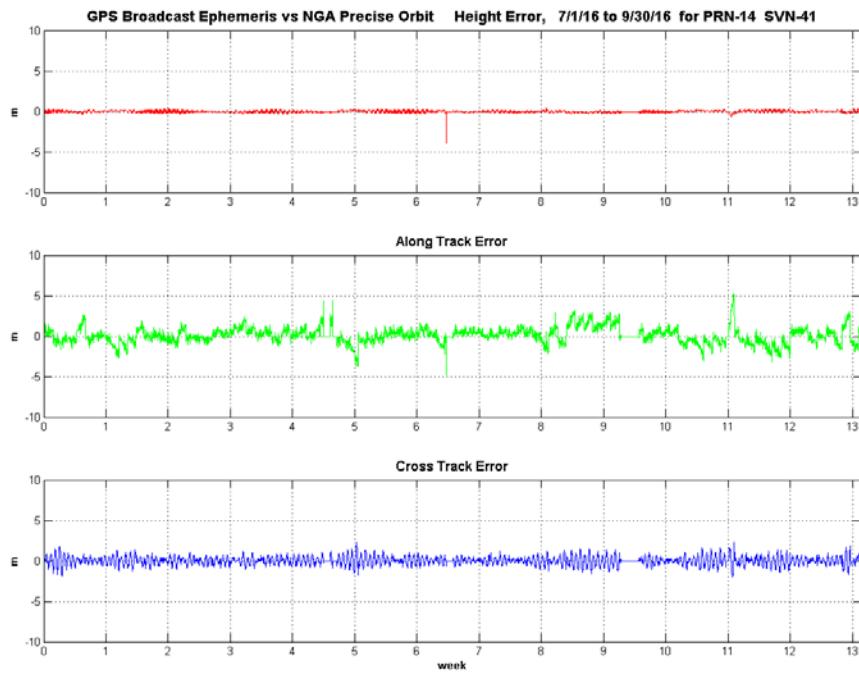
Figure 11-5.21, Orbit Error PRN-13 (SVN-43) Using C/A Nav Data**Figure 11-5.22, Orbit Error PRN-14 (SVN-41) Using C/A Nav Data**

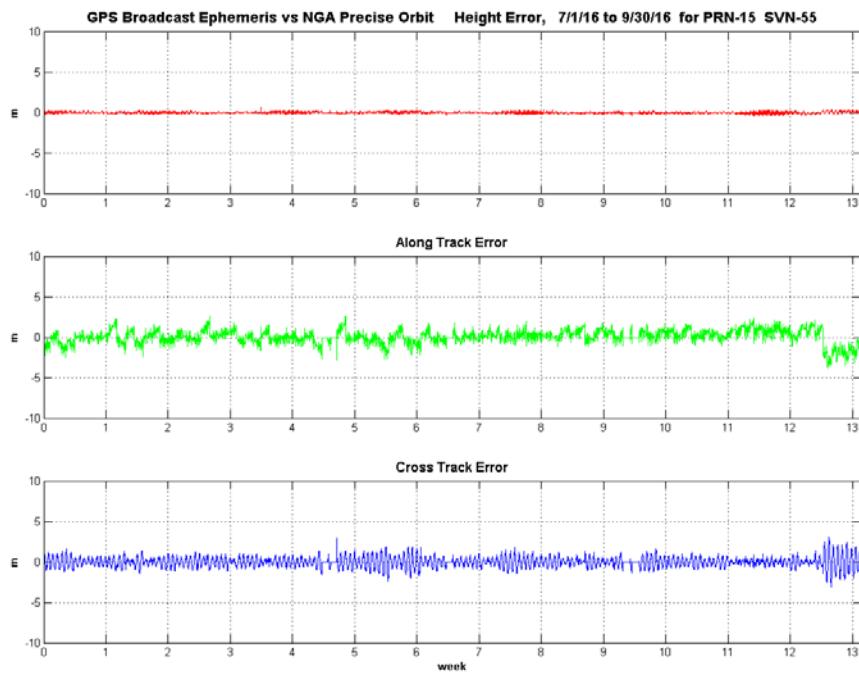
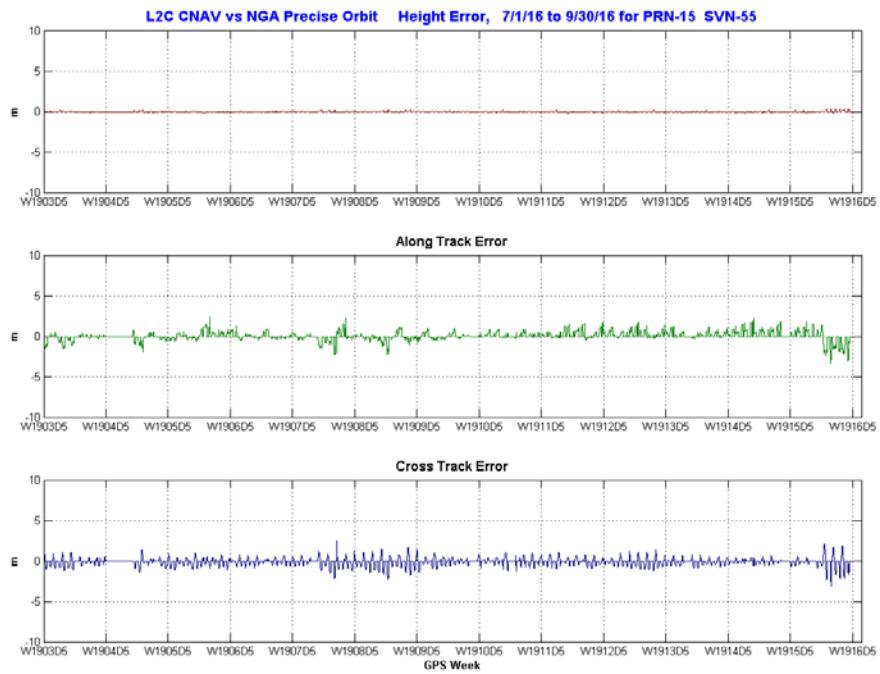
Figure 11-5.23, Orbit Error PRN-15 (SVN-55) Using C/A Nav Data**Figure 11-5.24, Orbit Error PRN-15 (SVN-55) Using L2C CNAV Data**

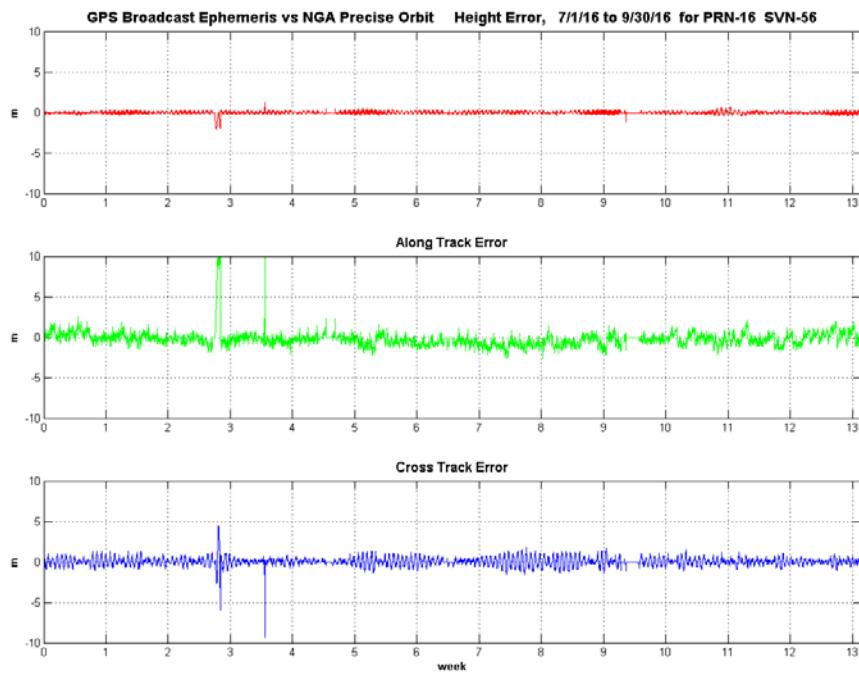
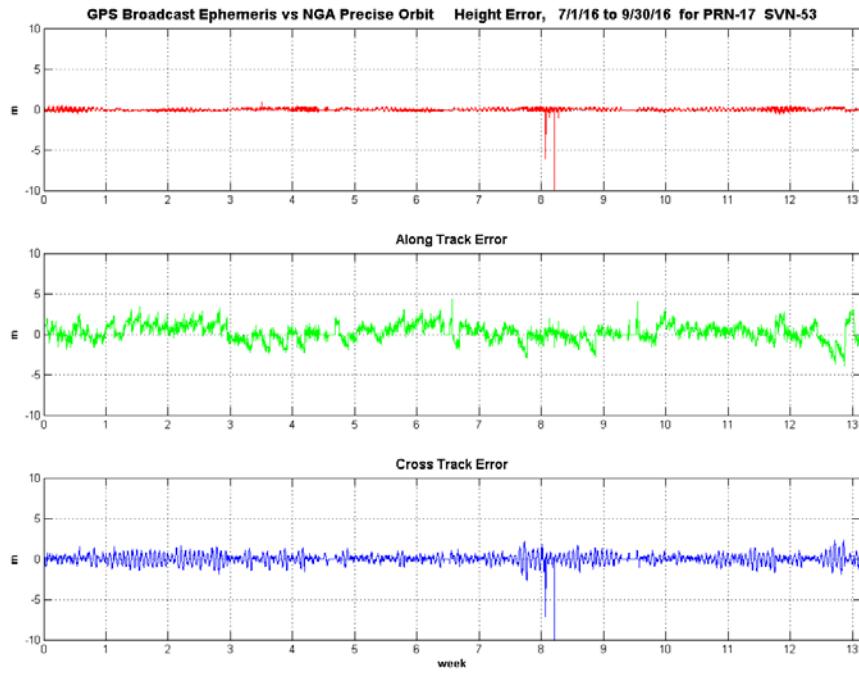
Figure 11-5.25, Orbit Error PRN-16 (SVN-56) Using C/A Nav Data**Figure 11-5.26, Orbit Error PRN-17 (SVN-53) Using C/A Nav Data**

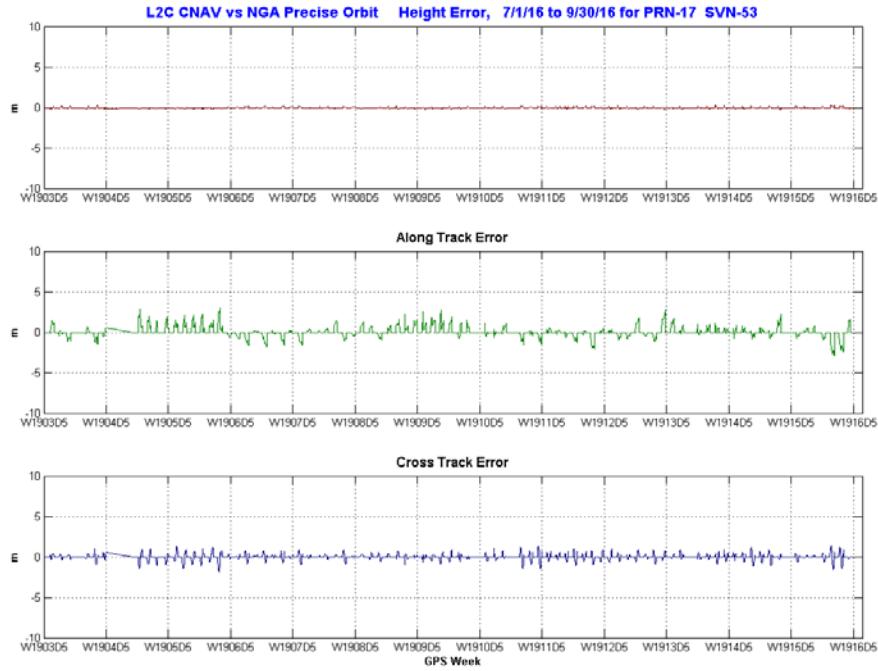
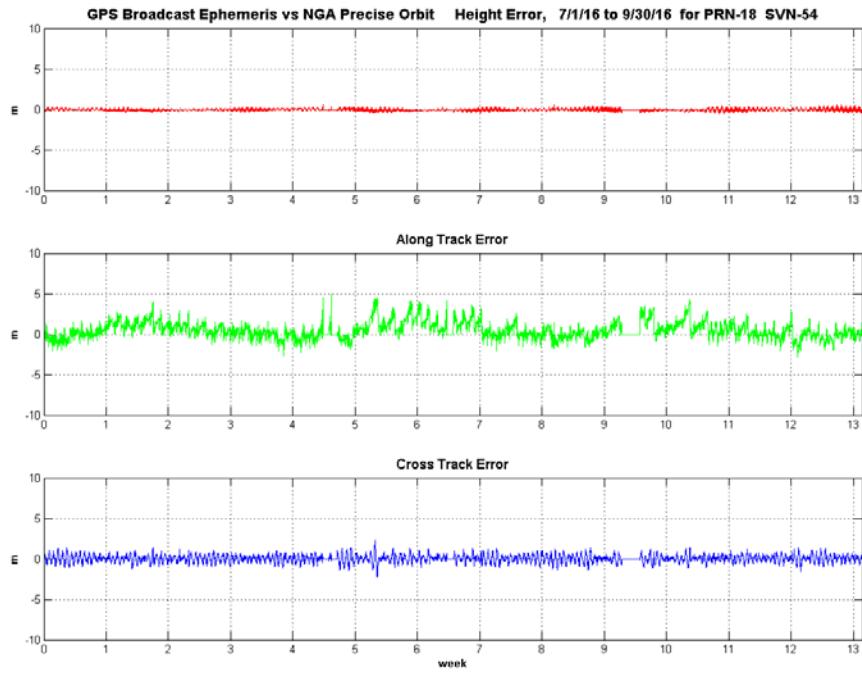
Figure 11-5.27, Orbit Error PRN-17 (SVN-53) Using L2C CNAV Data**Figure 11-5.28, Orbit Error PRN-18 (SVN-54) Using C/A Nav Data**

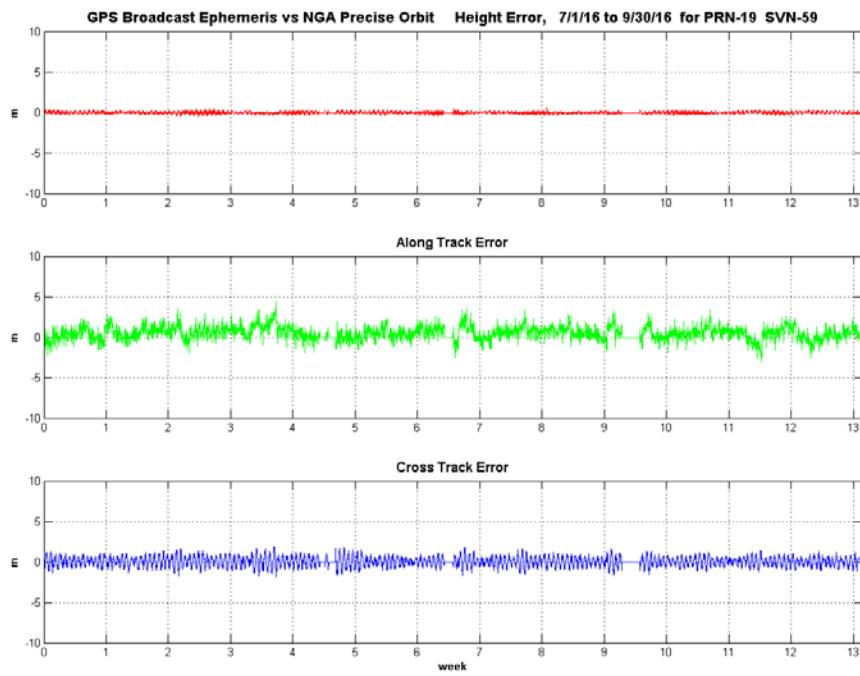
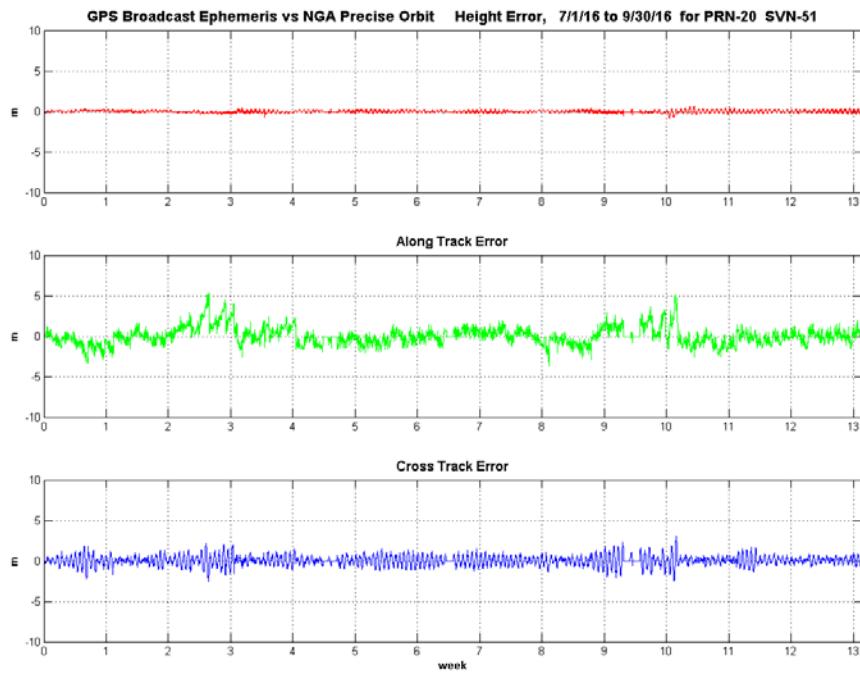
Figure 11-5.29, Orbit Error PRN-19 (SVN-59) Using C/A Nav Data**Figure 11-5.30, Orbit Error PRN-20 (SVN-51) Using C/A Nav Data**

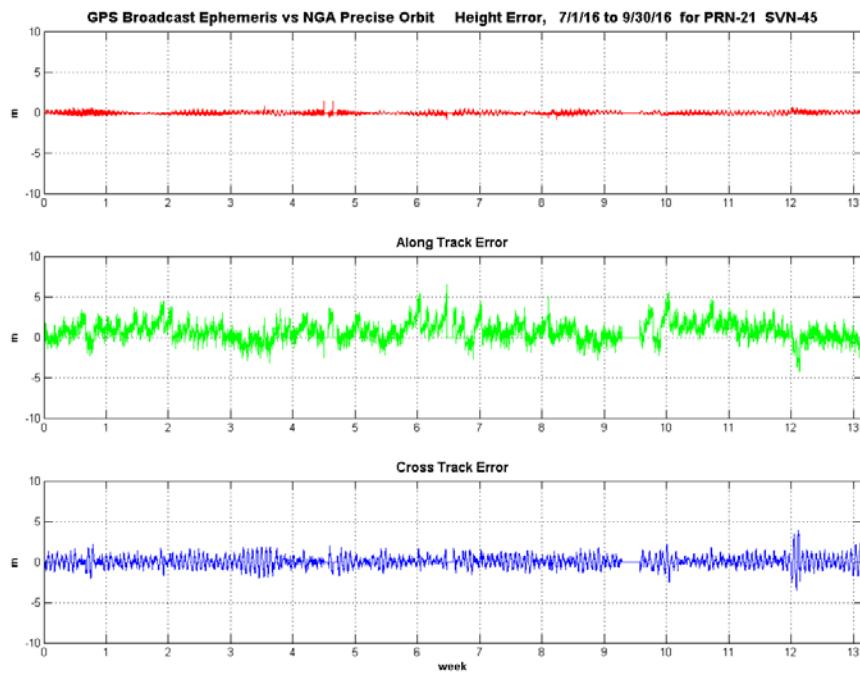
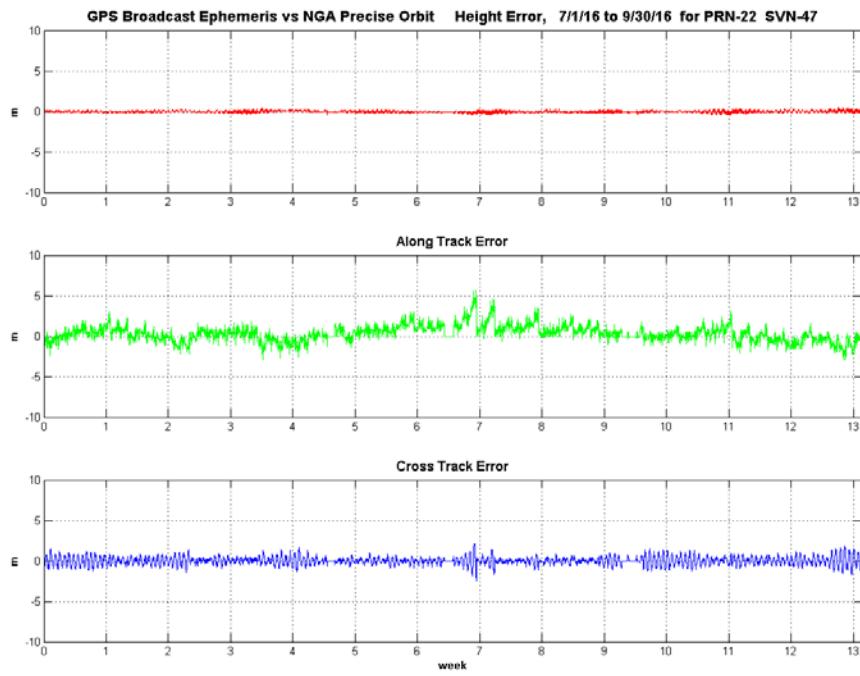
Figure 11-5.31, Orbit Error PRN-21 (SVN-45) Using C/A Nav Data**Figure 11-5.32, Orbit Error PRN-22 (SVN-47) Using C/A Nav Data**

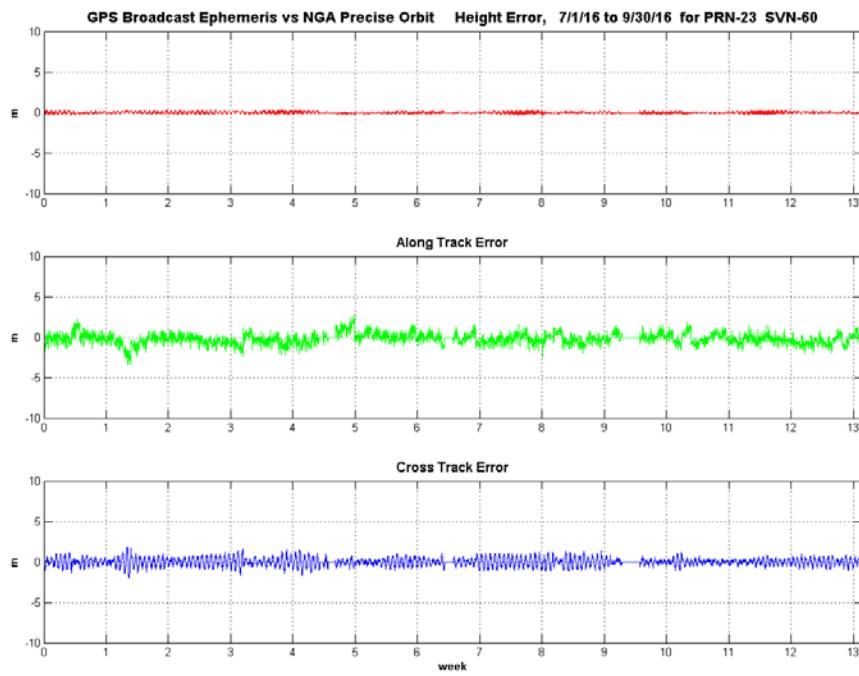
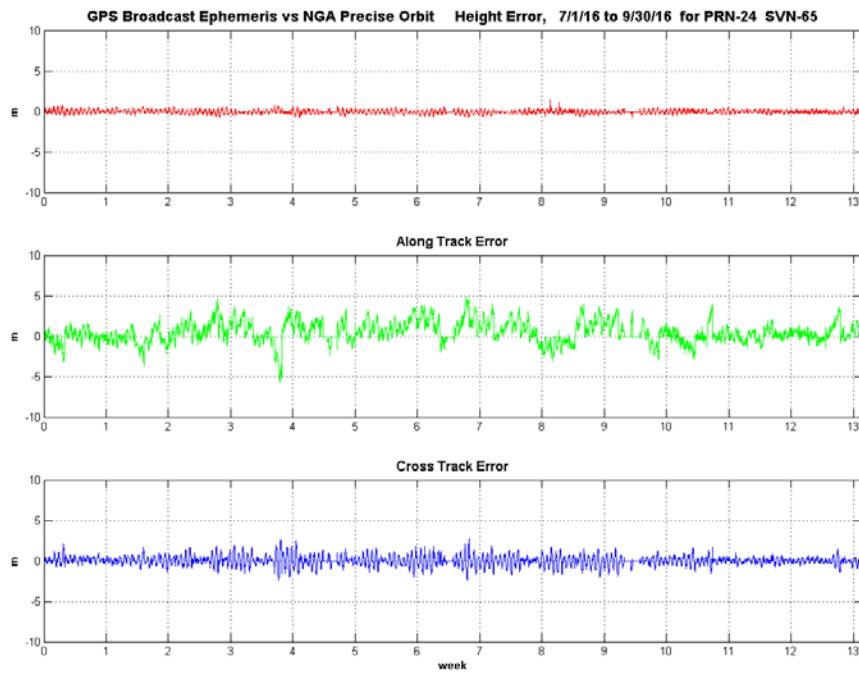
Figure 11-5.33, Orbit Error PRN-23 (SVN-60) Using C/A Nav Data**Figure 11-5.34, Orbit Error PRN-24 (SVN-65) Using C/A Nav Data**

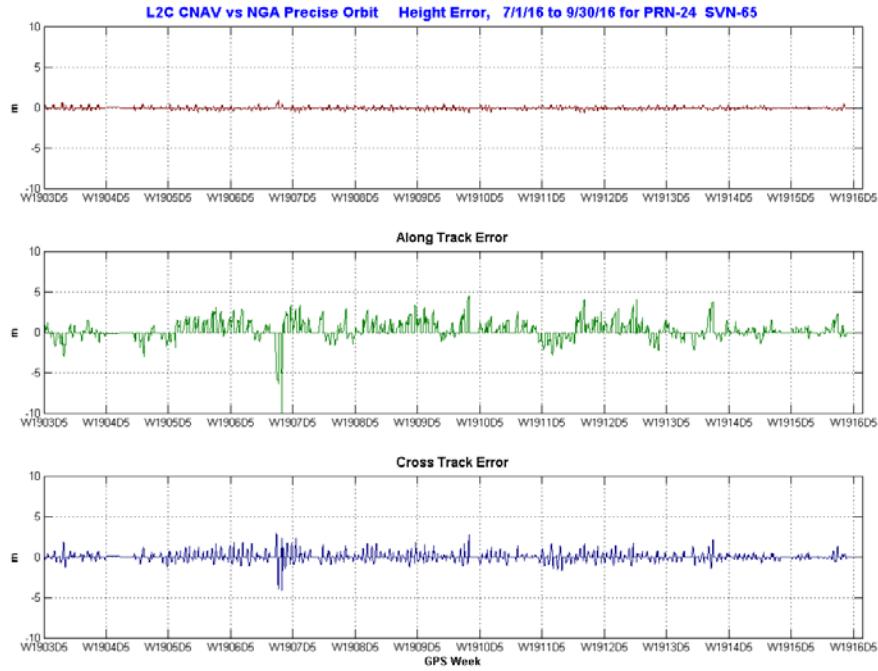
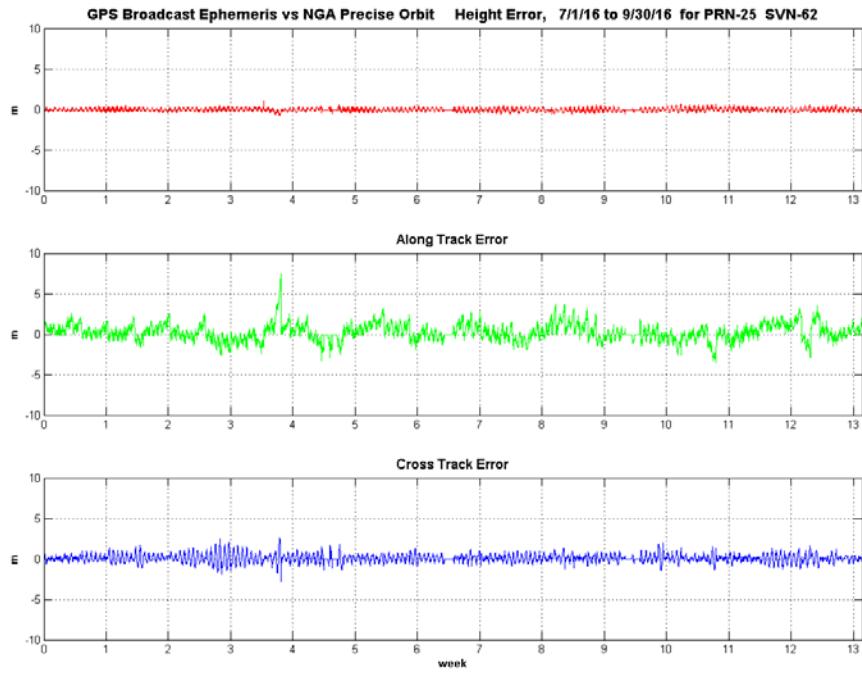
Figure 11-5.35, Orbit Error PRN-24 (SVN-65) Using L2C CNAV Data**Figure 11-5.36, Orbit Error PRN-25 (SVN-62) Using C/A Nav Data**

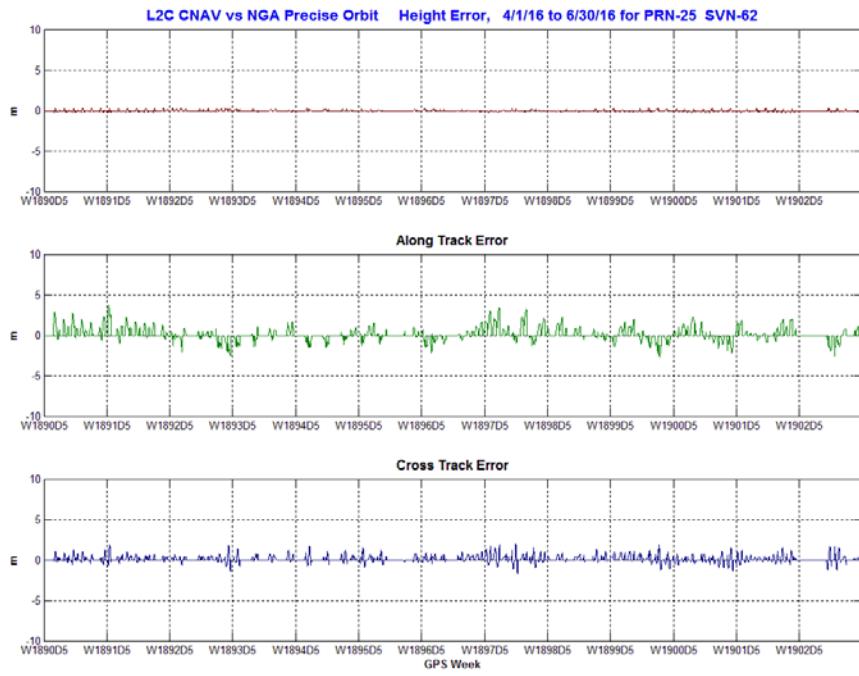
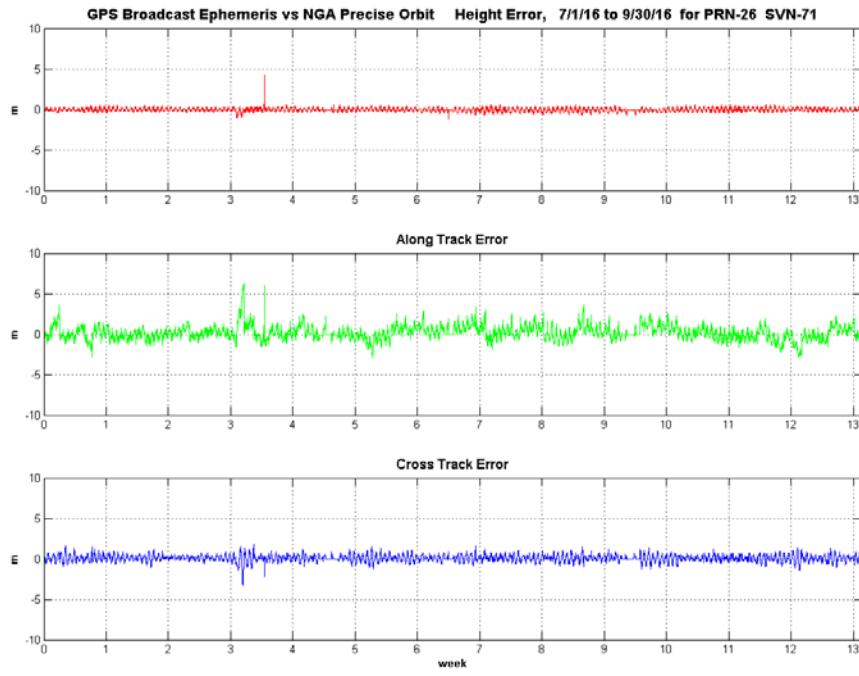
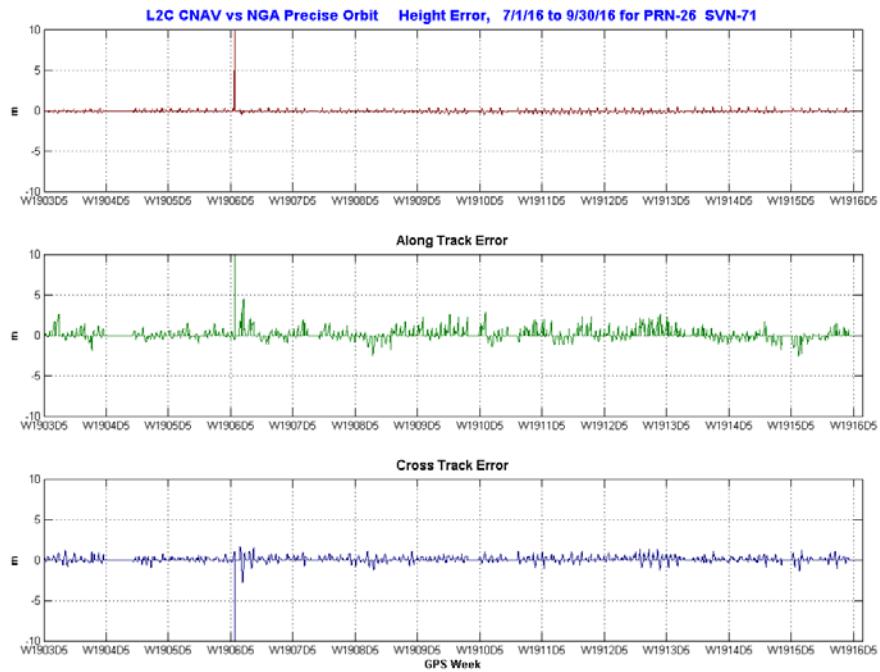
Figure 11-5.37, Orbit Error PRN-25 (SVN-62) Using L2C CNAV Data**Figure 11-5.38, Orbit Error PRN-26 (SVN-71) Using C/A Nav Data**

Figure 11-5.39, Orbit Error PRN-26 (SVN-71) Using L2C CNAV Data

07/22 PRN-26
132.83 Height Error
after Delta V
NANU 2016048

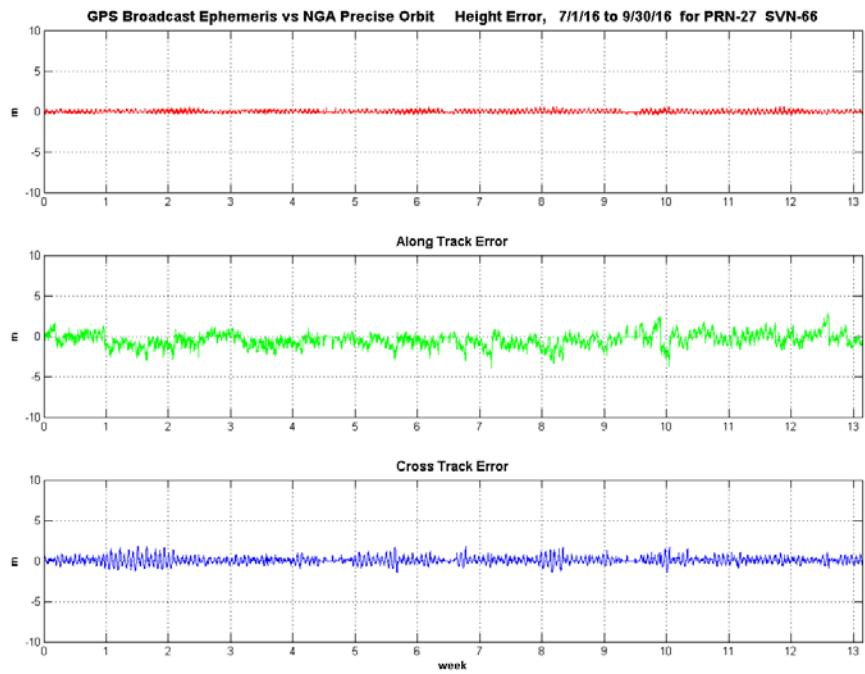
Figure 11-5.40, Orbit Error PRN-27 (SVN-66) Using C/A Nav Data

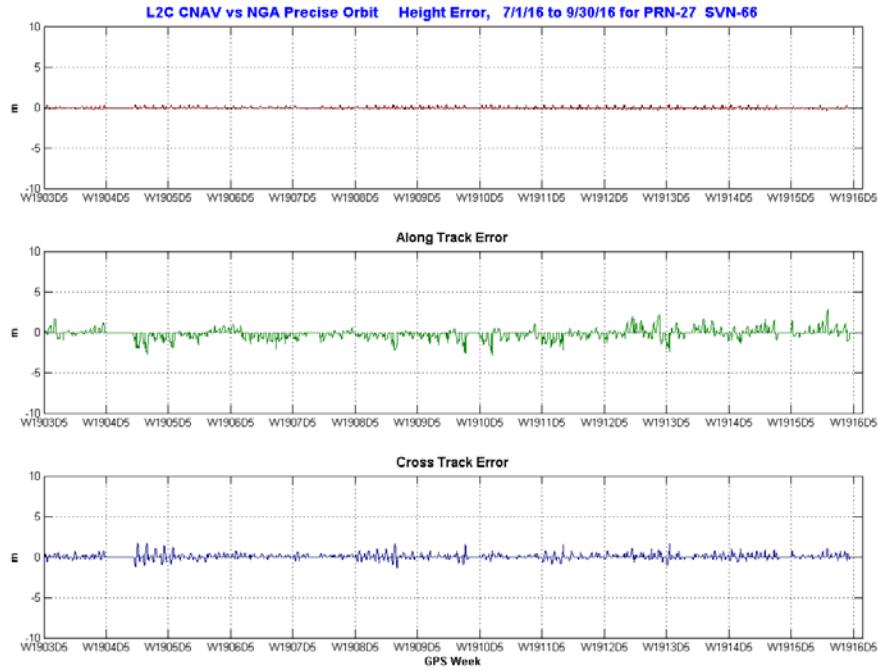
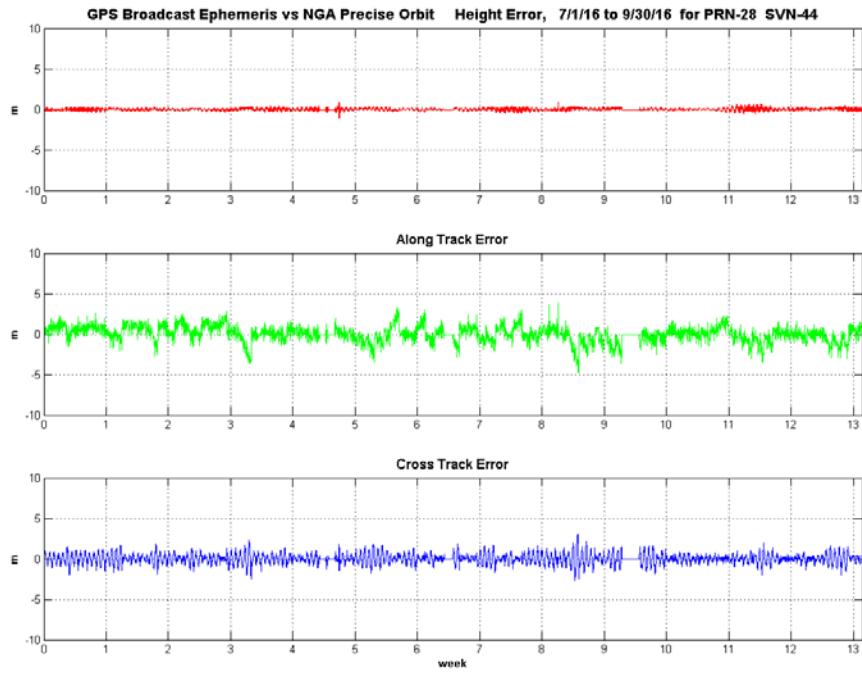
Figure 11-5.41, Orbit Error PRN-27 (SVN-66) Using L2C CNAV Data**Figure 11-5.42, Orbit Error PRN-28 (SVN-44) Using C/A Nav Data**

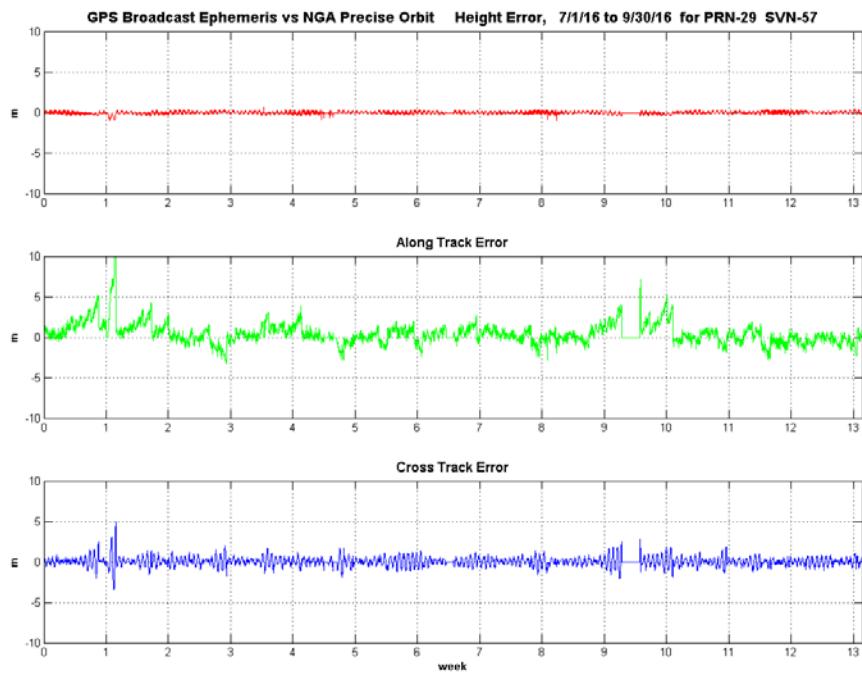
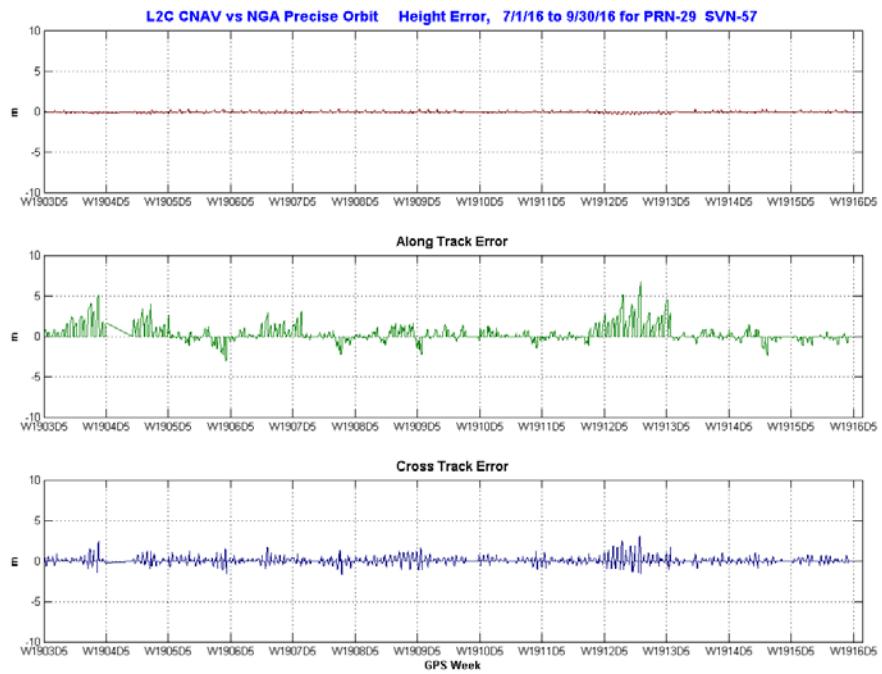
Figure 11-5.43, Orbit Error PRN-29 (SVN-57) Using C/A Nav Data**Figure 11-5.44, Orbit Error PRN-29 (SVN-57) Using L2C CNAV Data**

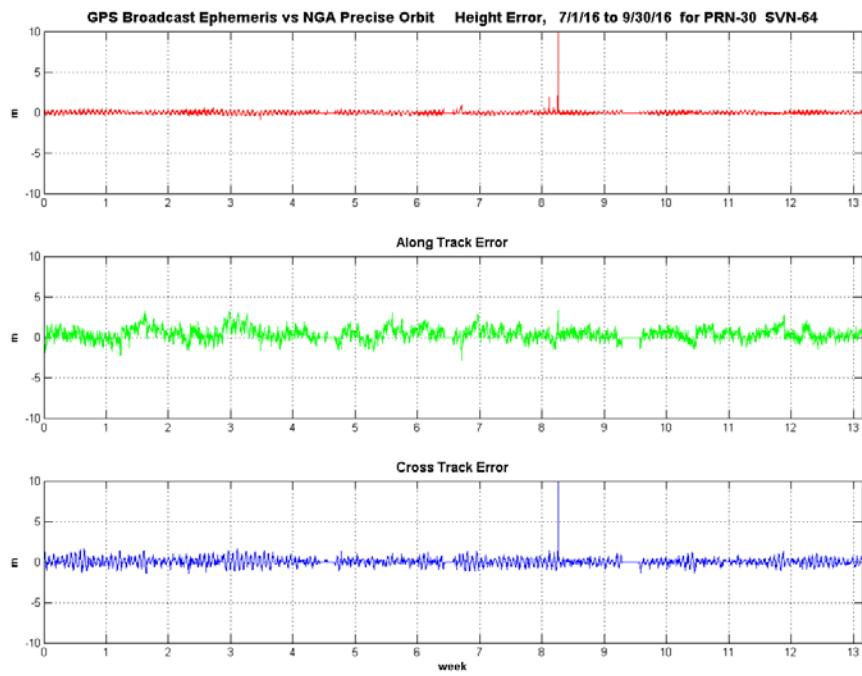
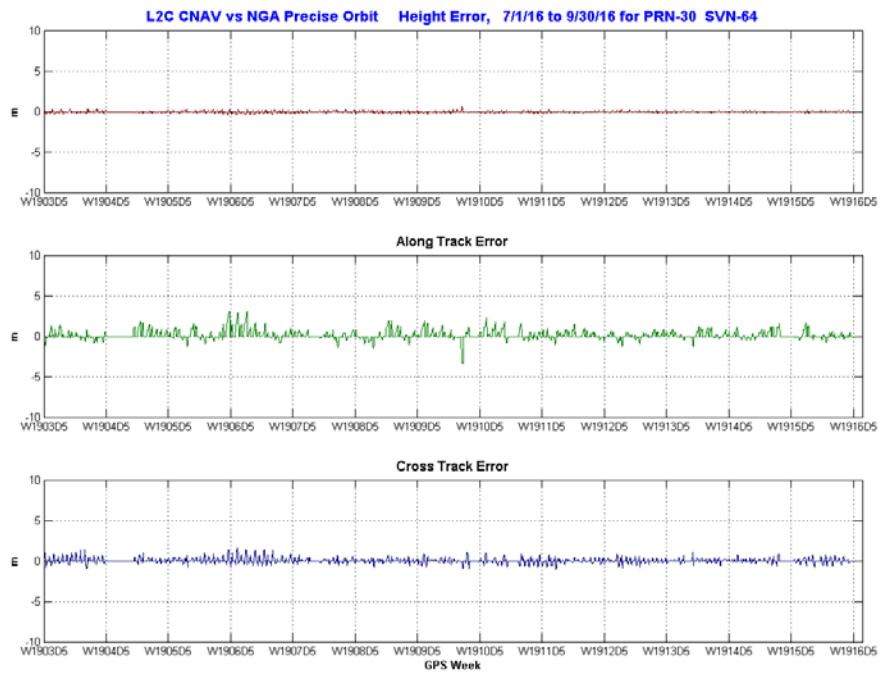
Figure 11-5.45, Orbit Error PRN-30 (SVN-64) Using C/A Nav Data**Figure 11-5.46, Orbit Error PRN-30 (SVN-64) Using L2C CNAV Data**

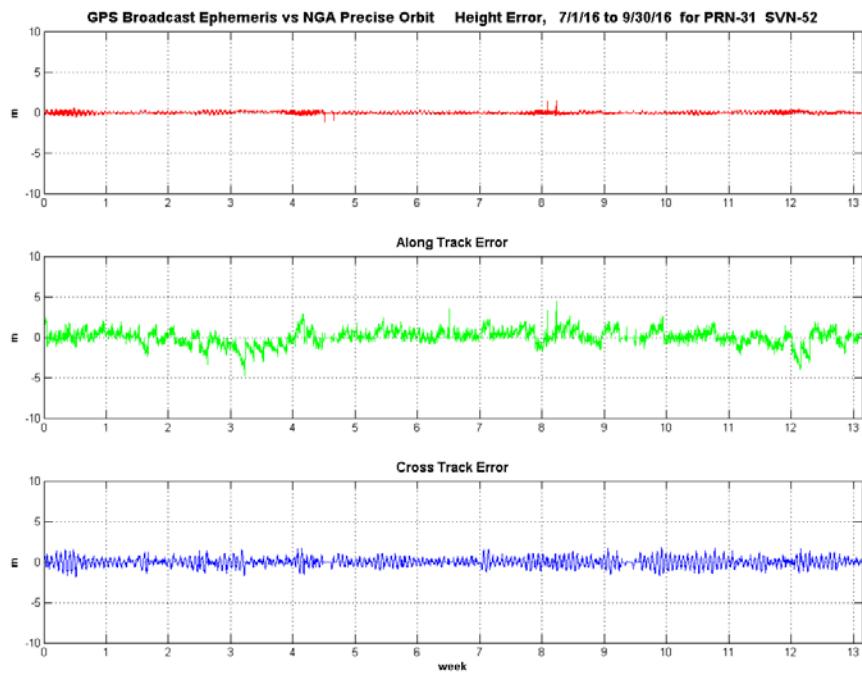
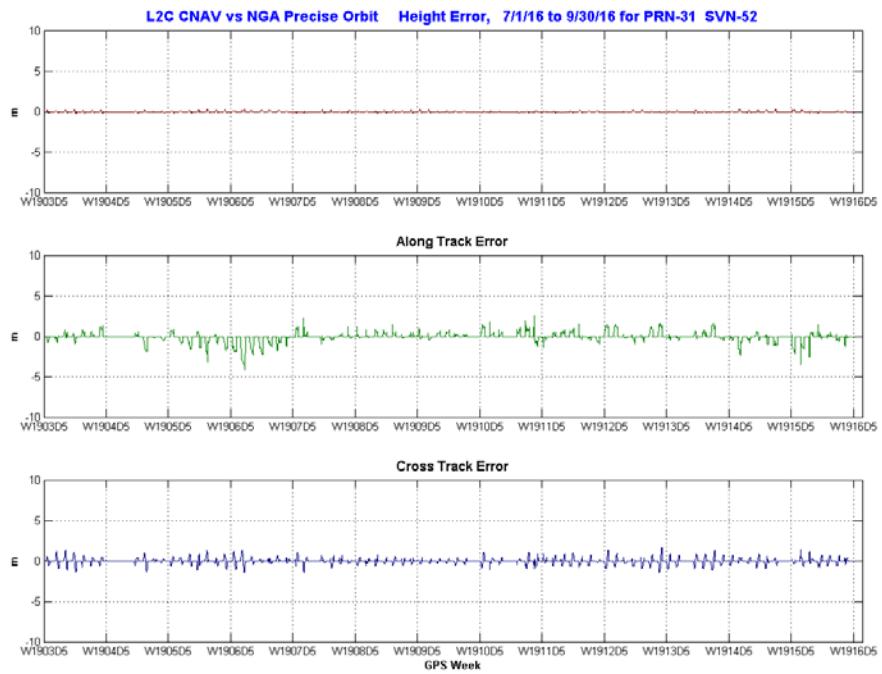
Figure 11-5.47, Orbit Error PRN-31 (SVN-52) Using C/A Nav Data**Figure 11-5.48, Orbit Error PRN-31 (SVN-52) Using L2C CNAV Data**

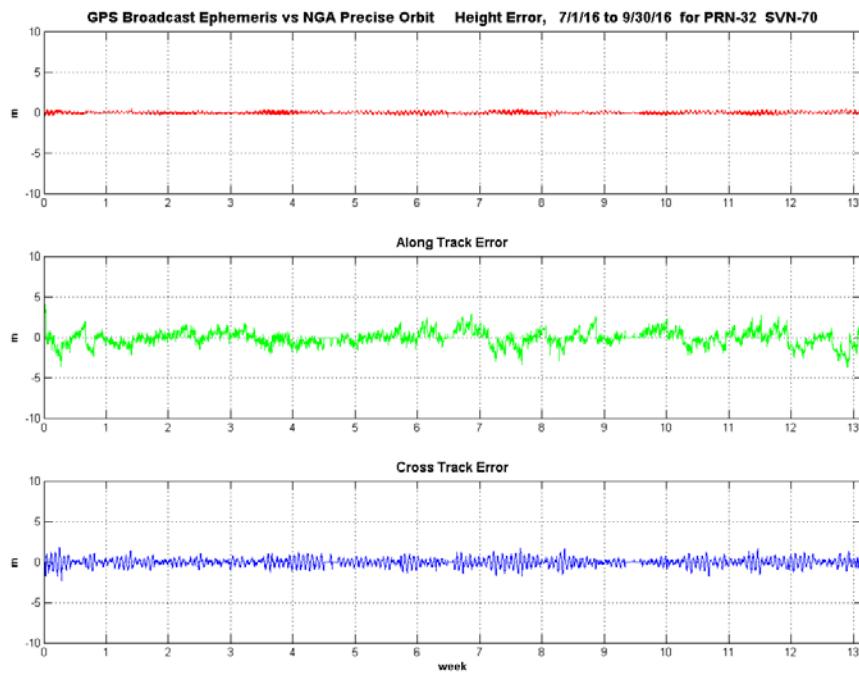
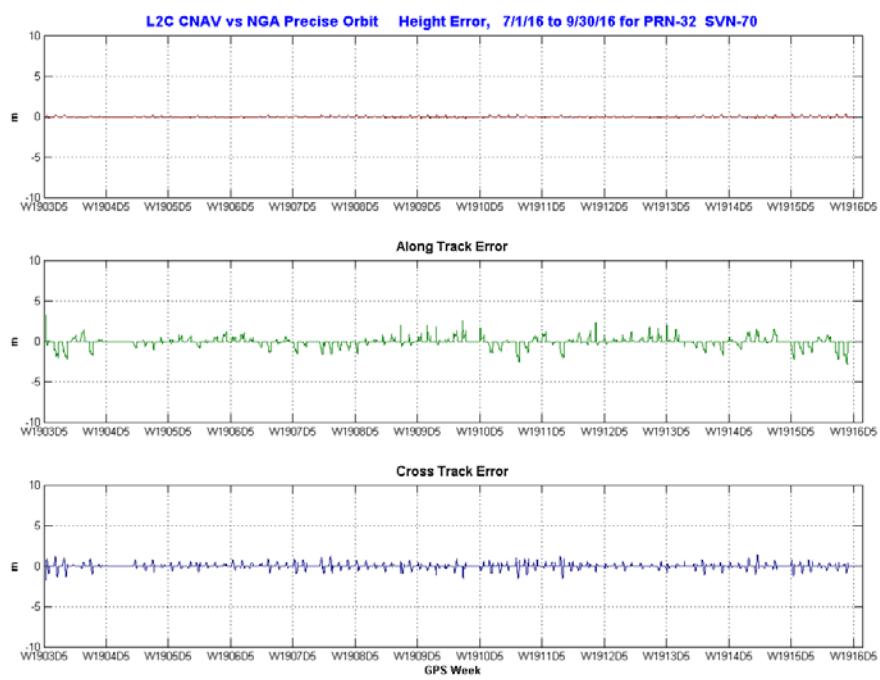
Figure 11-5.49, Orbit Error PRN-32 (SVN-70) Using C/A Nav Data**Figure 11-5.50, Orbit Error PRN-32 (SVN-70) Using L2C CNAV Data**

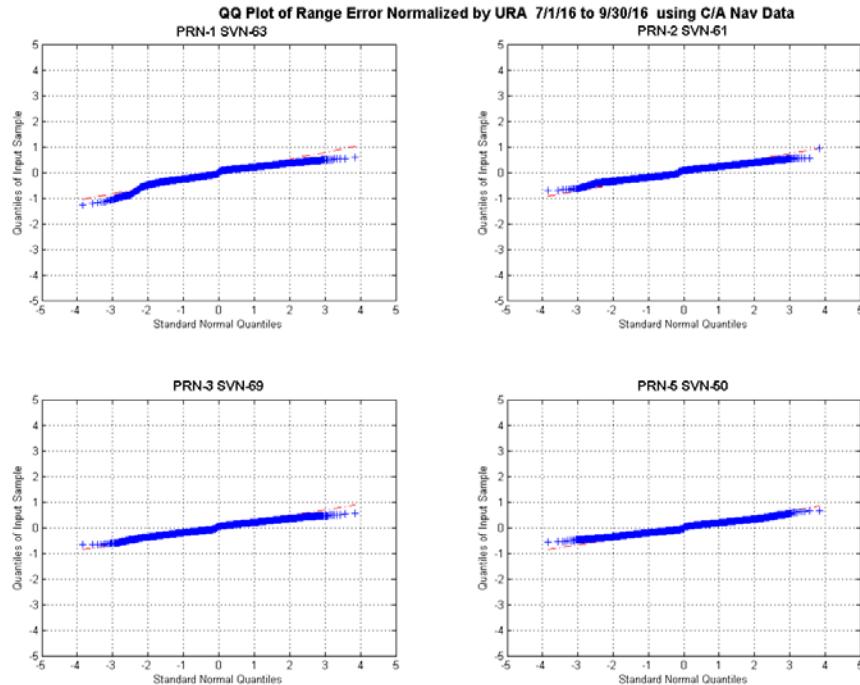
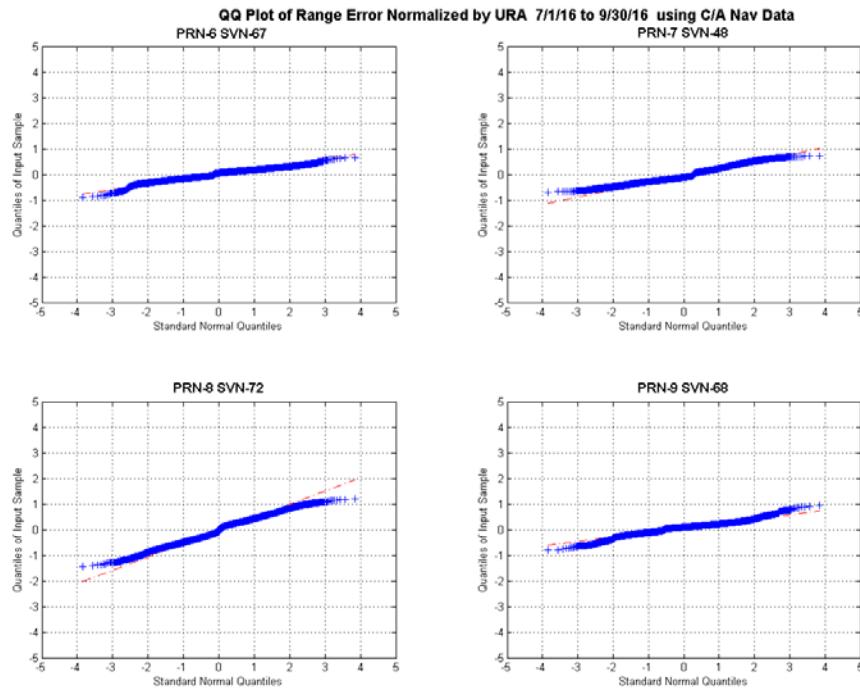
Figure 11-6 QQ Plots of URA Normalized Error for All Satellites**Figure 11-6.1, QQ Plots of Range Error PRNs 1 to 5 Using C/A Nav Data****Figure 11-6.2, QQ Plots of Range Error PRNs 6 to 9 Using C/A Nav Data**

Figure 11-6.3, QQ Plots of Range Error PRNs 10 to 13 Using C/A Nav Data

PRN-12
09/05 07:15
4.19 sigma
10.39m error
TOTAL URA 2.4m

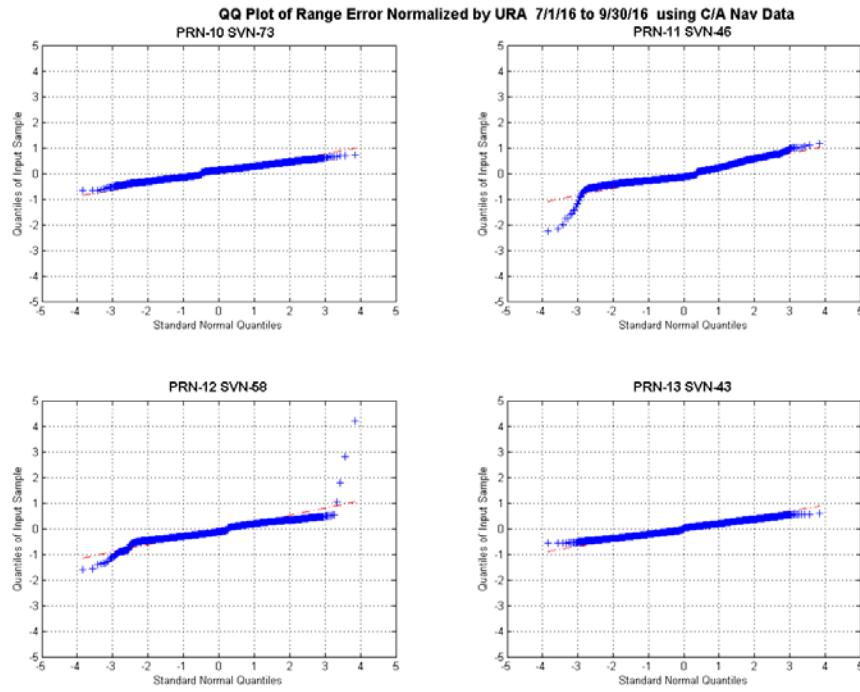
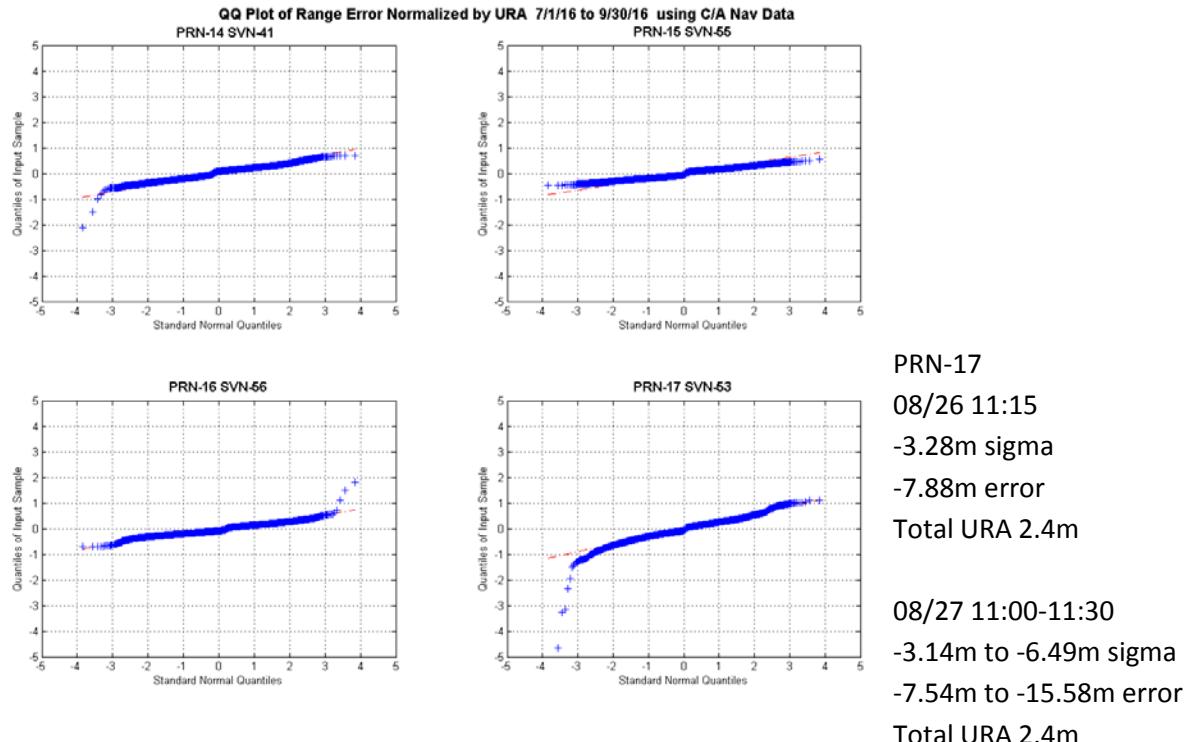
**Figure 11-6.4, QQ Plots of Range Error PRNs 14 to 17 Using C/A Nav Data**

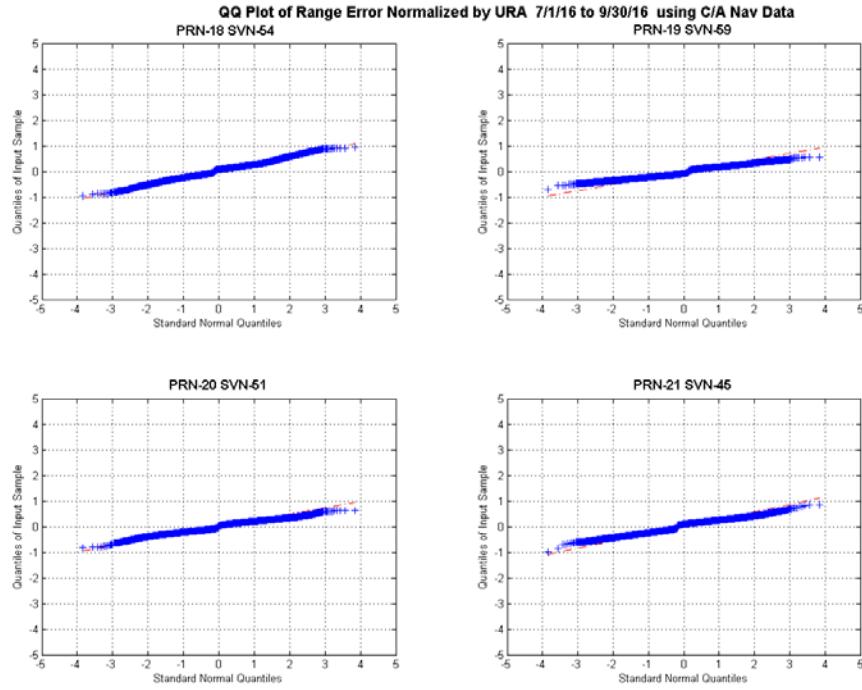
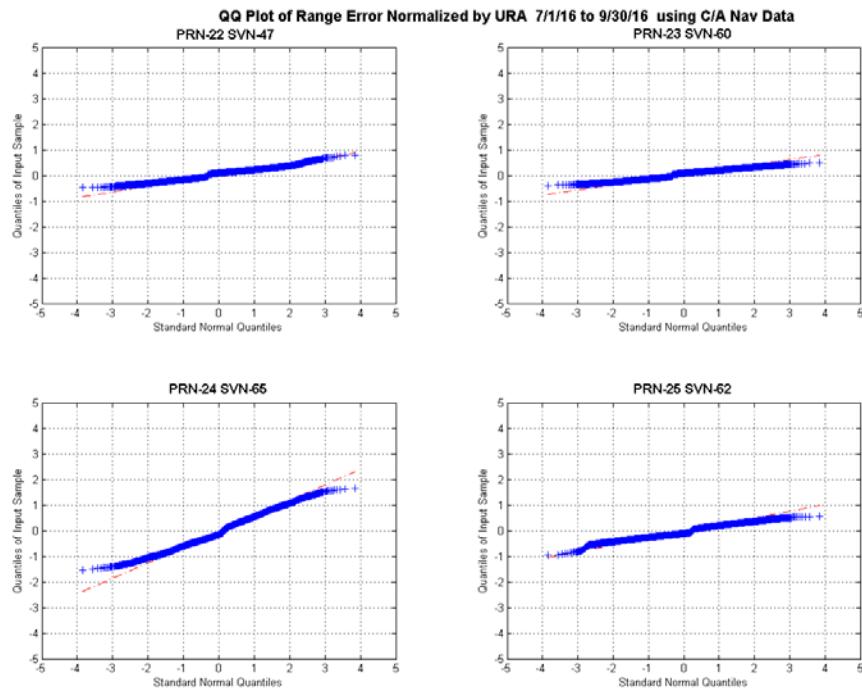
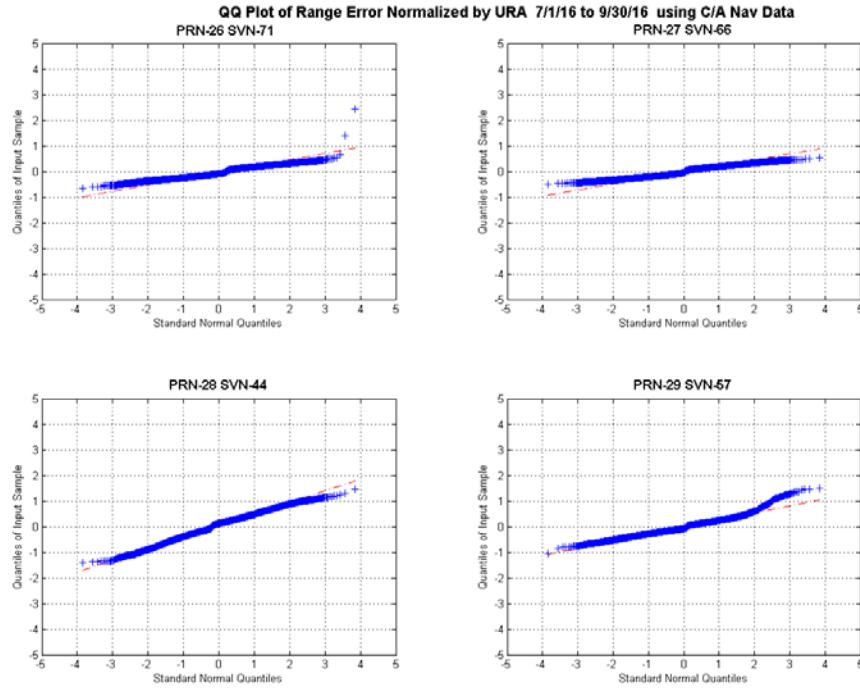
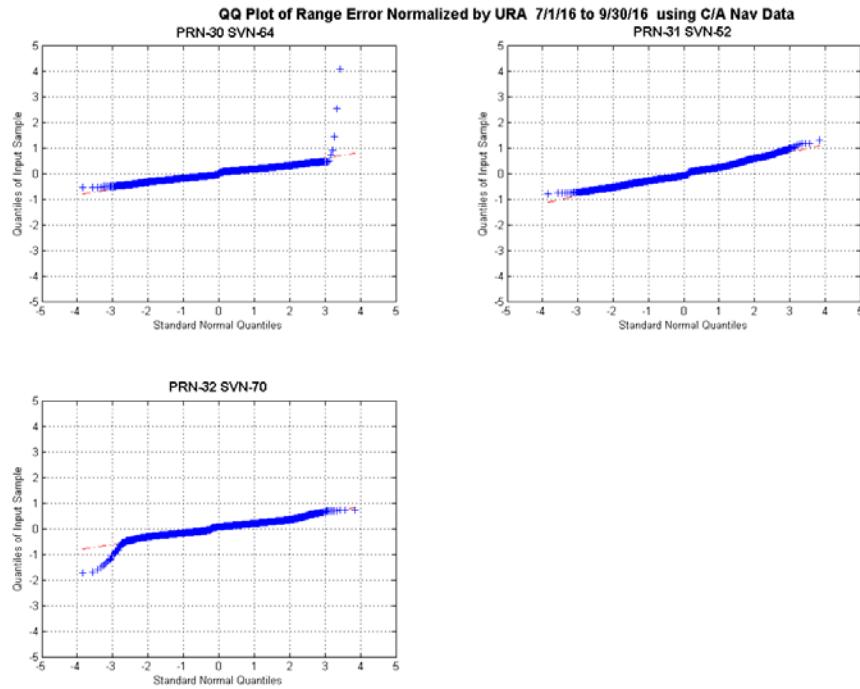
Figure 11-6.5, QQ Plots of Range Error PRNs 18 to 21 Using C/A Nav Data**Figure 11-6.6, QQ Plots of Range Error PRNs 22 to 25 Using C/A Nav Data**

Figure 11-6.7, QQ Plots of Range Error PRNs 26 to 29 Using C/A Nav Data**Figure 11-6.8, QQ Plots of Range Error PRNs 30 to 32 Using C/A Nav Data**

PRN-17

08/27 19:15 - 19:45

4.08m to 8.84m sigma

9.80m to 21.22m error

Total URA 2.4m

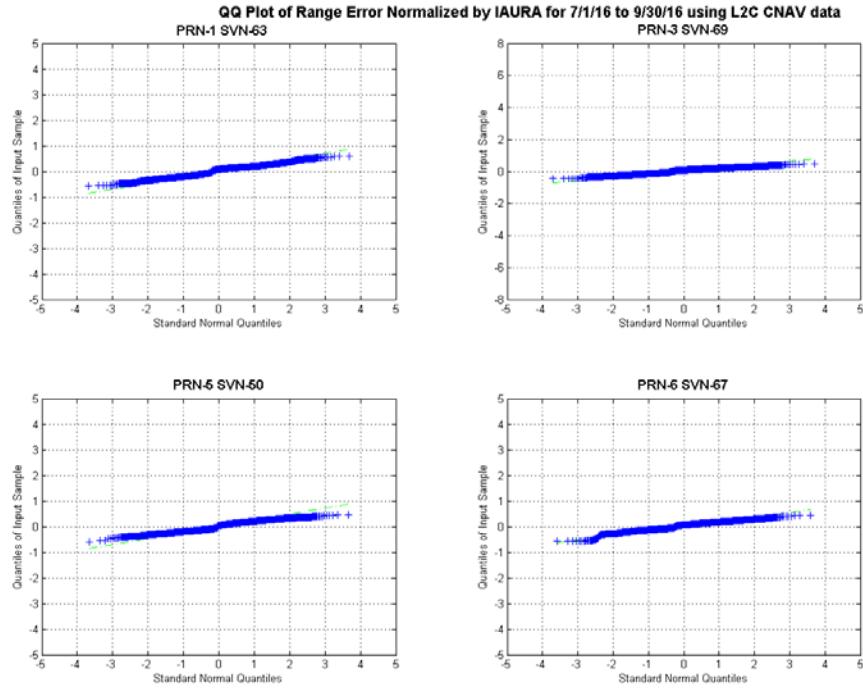
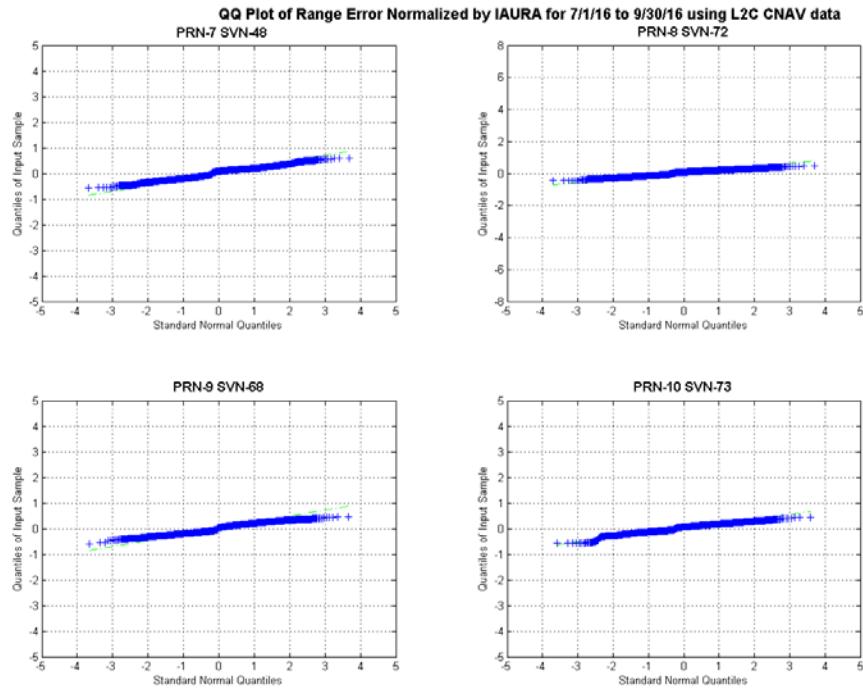
Figure 11-6.9, QQ Plots of Range Error PRNs 1, 3, 5, and 6 Using L2C CNAV Data**Figure 11-6.10, QQ Plots of Range Error PRNs 7, 8, 9, and 10 Using L2C CNAV Data**

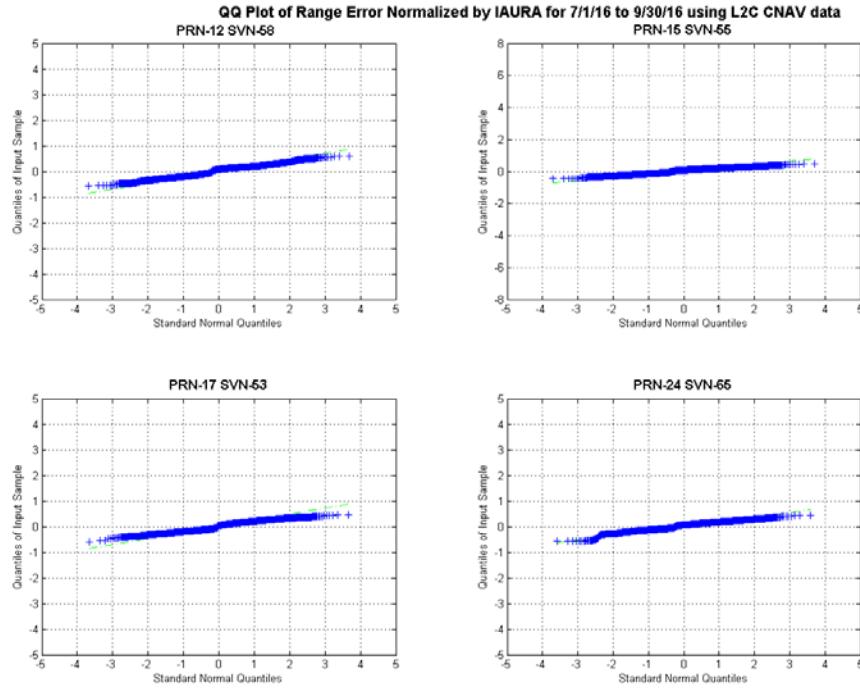
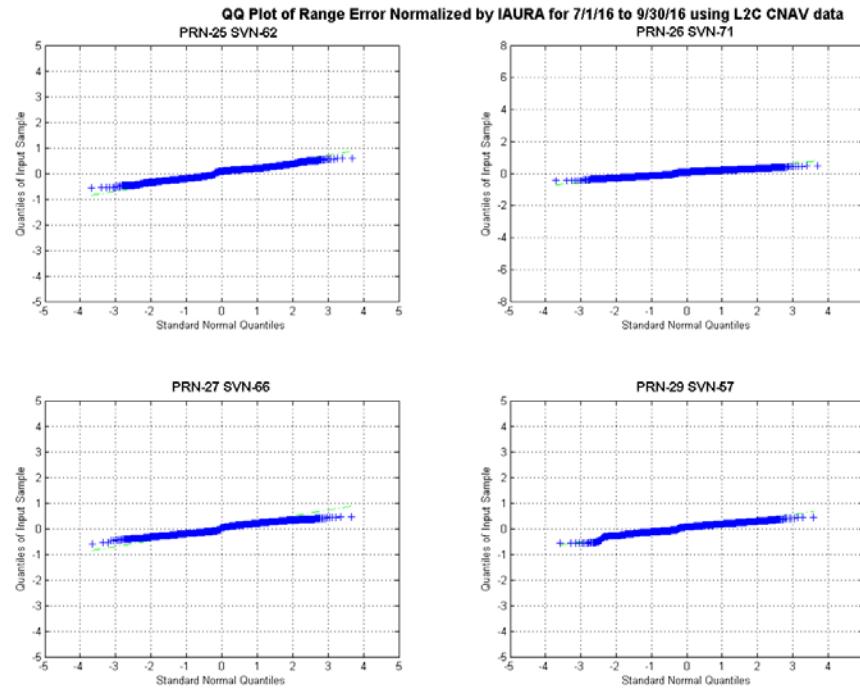
Figure 11-6.11, QQ Plots of Range Error PRNs 12, 15, 17, and 24 Using L2C CNAV Data**Figure 11-6.12, QQ Plots of Range Error PRNs 25, 26, 27 and 29 Using L2C CNAV Data**

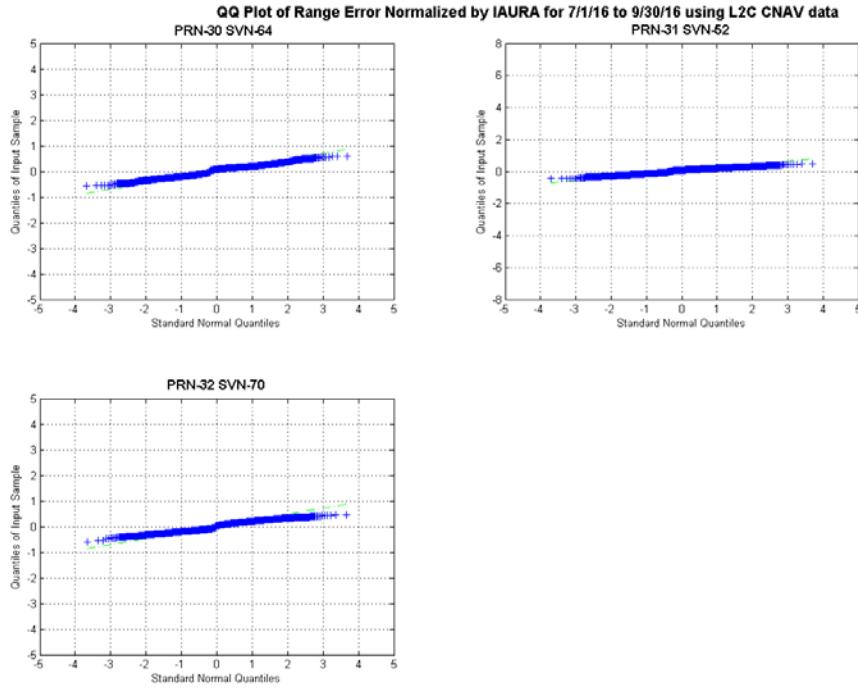
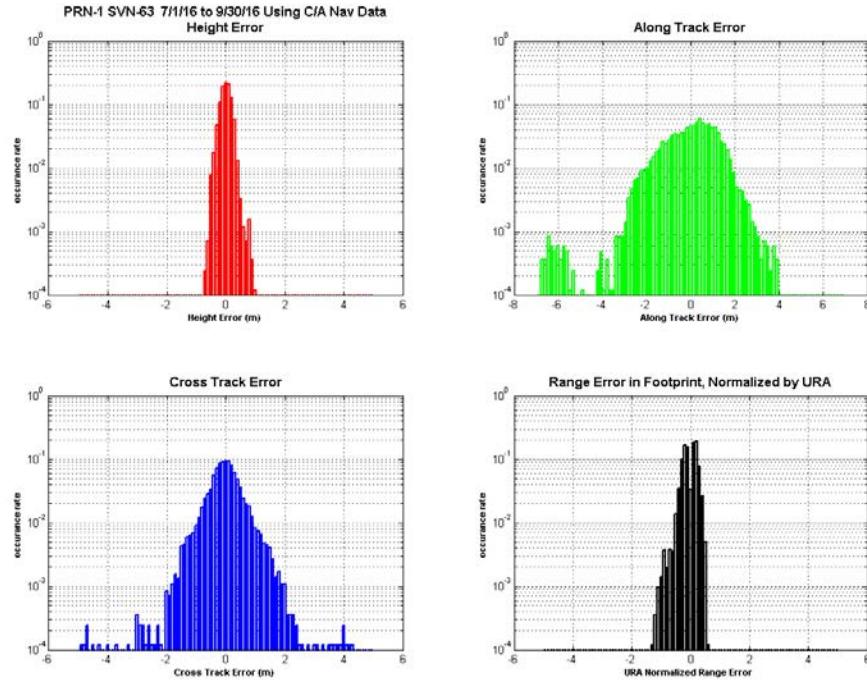
Figure 11-6.13, QQ Plots of Range Error PRNs 30, 31 and 32 Using L2C CNAV Data**Figure 11-7 Histogram Plots of H, A, C, and Range Error for All Satellites****Figure 11-7.1 Histograms of H, A, C, and Range Error PRN-1 Using C/A Nav Data**

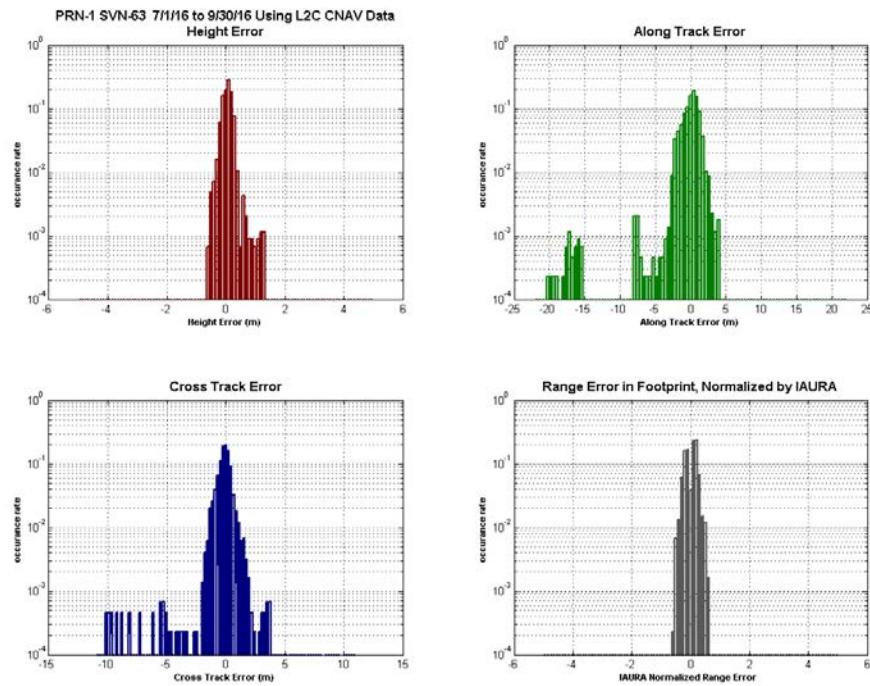
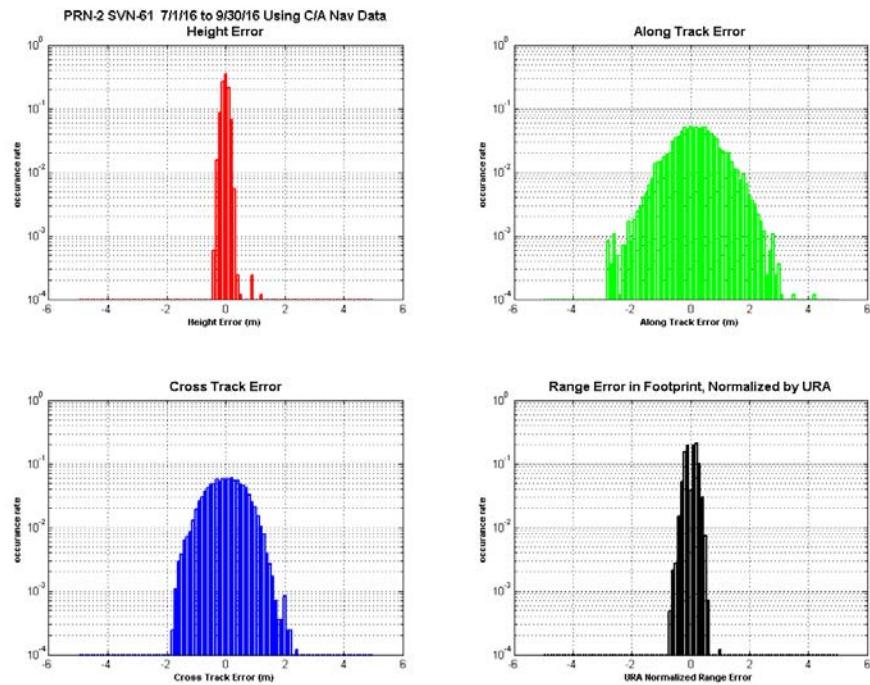
Figure 11-7.2, Histograms of H, A, C, and Range Error PRN-1 Using L2C CNAV Data**Figure 11-7.3, Histograms of H, A, C, and Range Error PRN-2 Using C/A Nav Data**

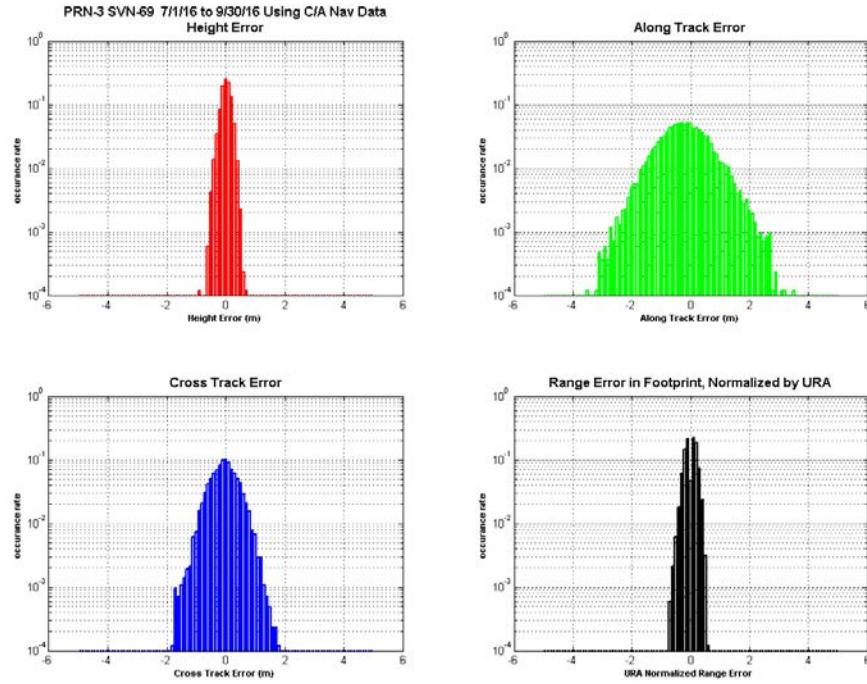
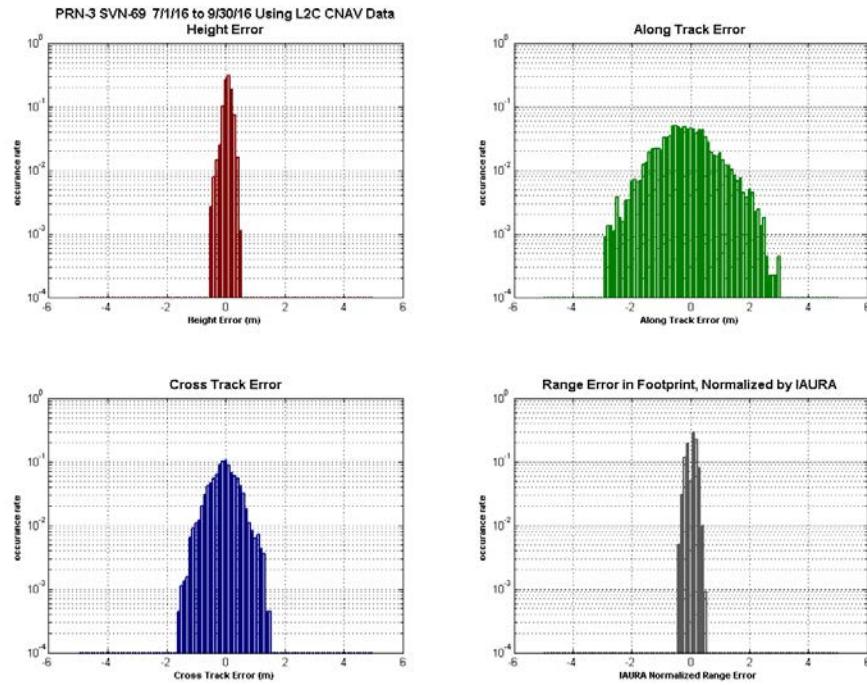
Figure 11-7.4, Histograms of H, A, C, and Range Error PRN-3 Using C/A Nav Data**Figure 11-7.5, Histograms of H, A, C, and Range Error PRN-3 Using L2C CNAV**

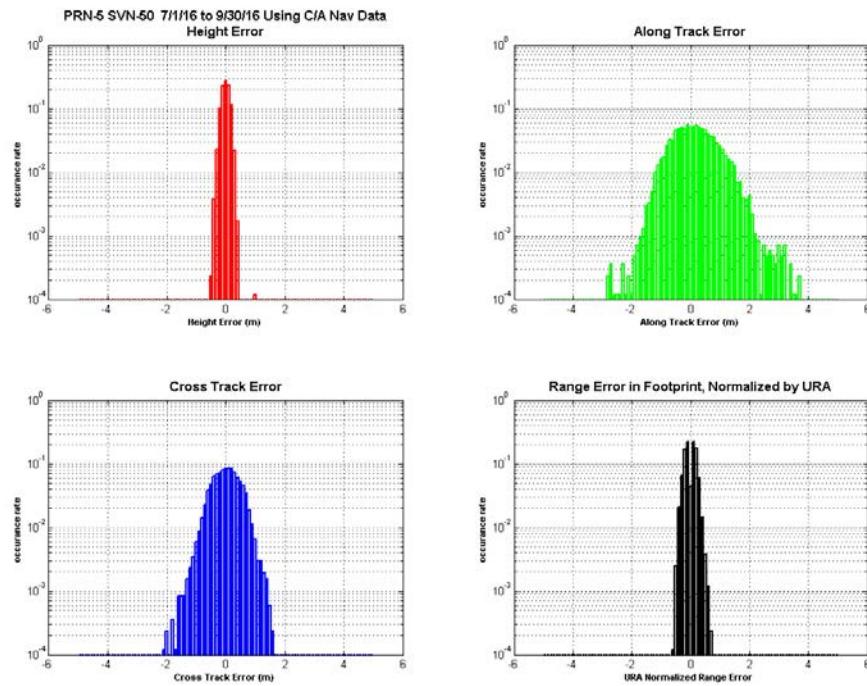
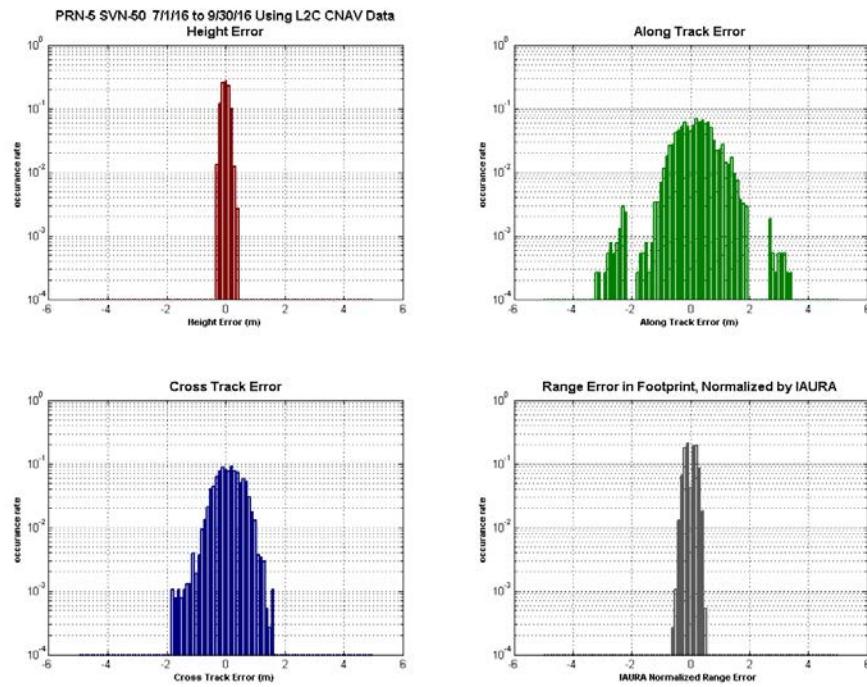
Figure 11-7.6, Histograms of H, A, C, and Range Error PRN-5 Using C/A Nav Data**Figure 11-7.7, Histograms of H, A, C, and Range Error PRN-5 Using L2C CNAV Data**

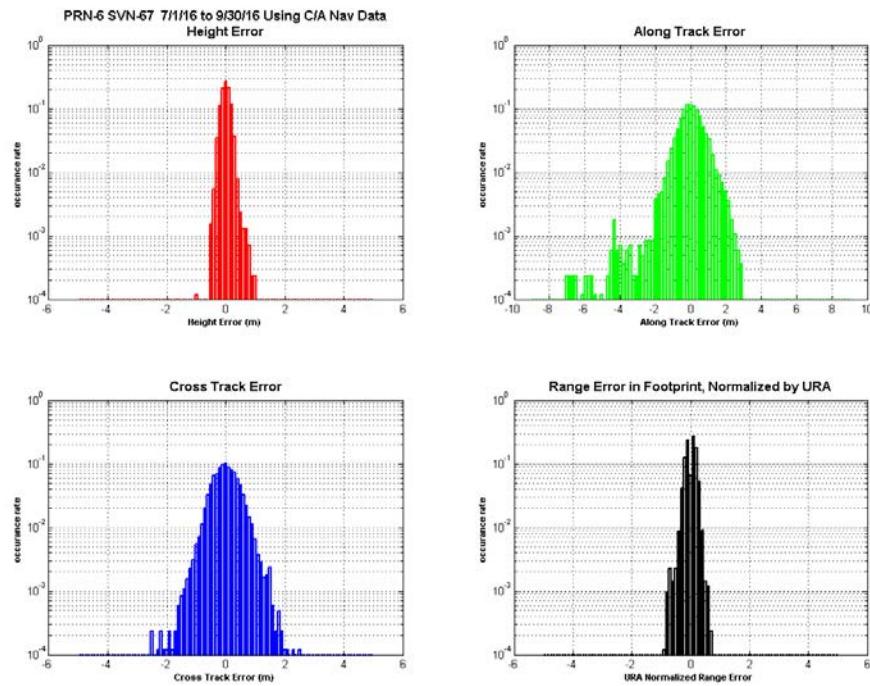
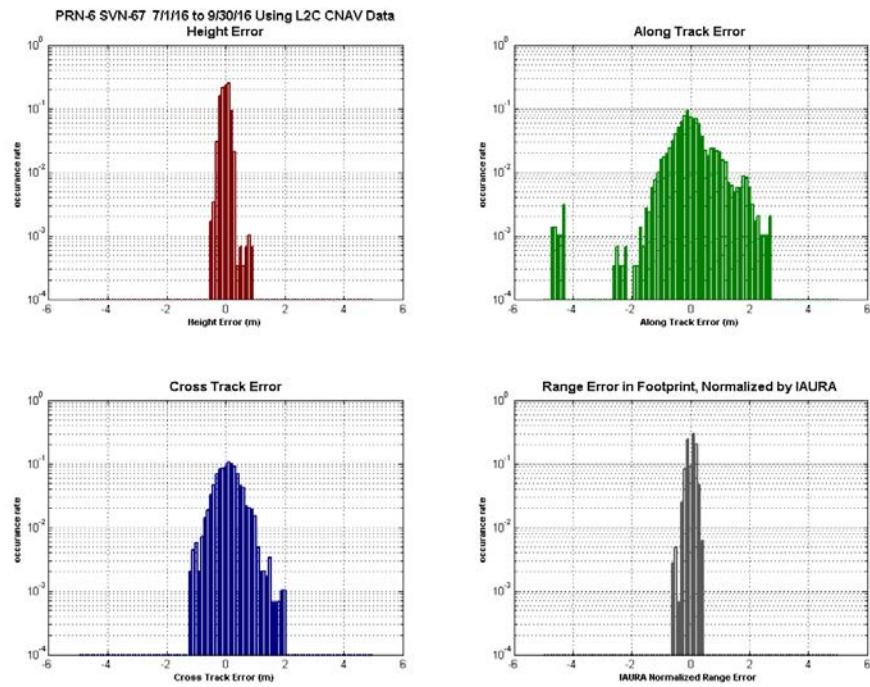
Figure 11-7.8, Histograms of H, A, C, and Range Error PRN-6 Using C/A Nav Data**Figure 11-7.9, Histograms of H, A, C, and Range Error PRN-6 Using L2C CNAV Data**

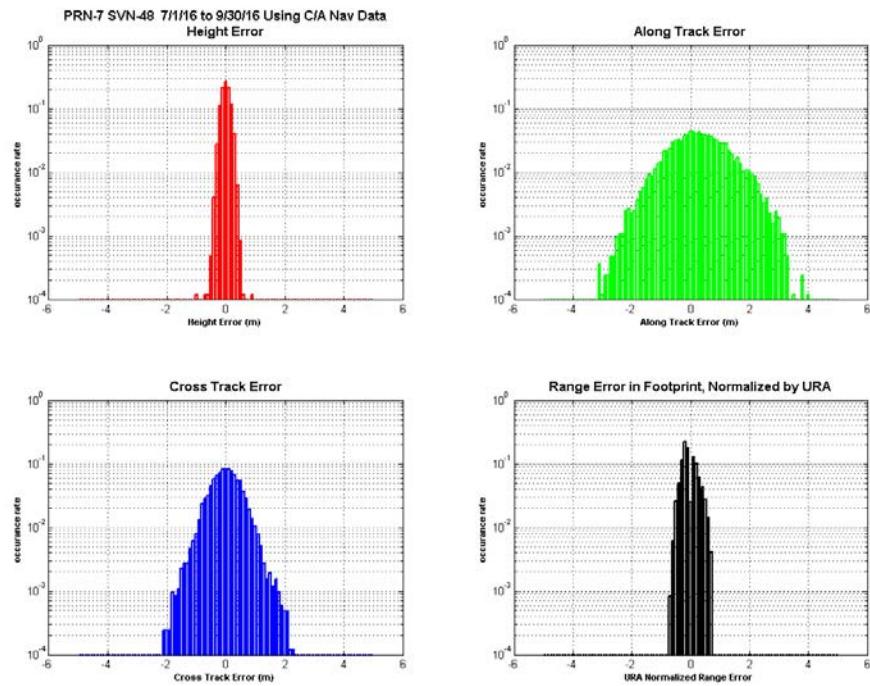
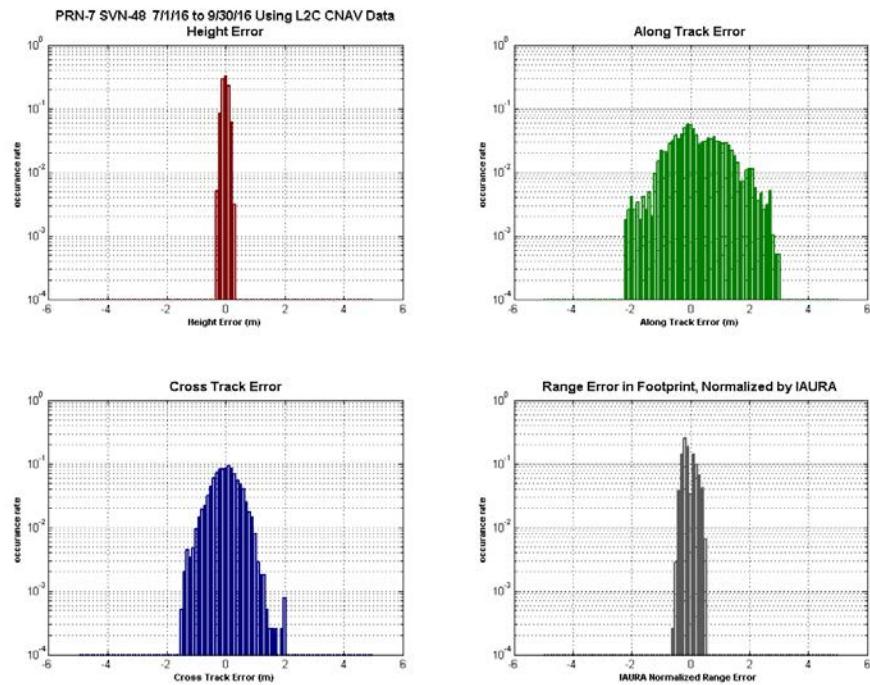
Figure 11-7.10, Histograms of H, A, C, and Range Error PRN-7 Using C/A Nav Data**Figure 11-7.11, Histograms of H, A, C, and Range Error PRN-7 Using L2C CNAV Data**

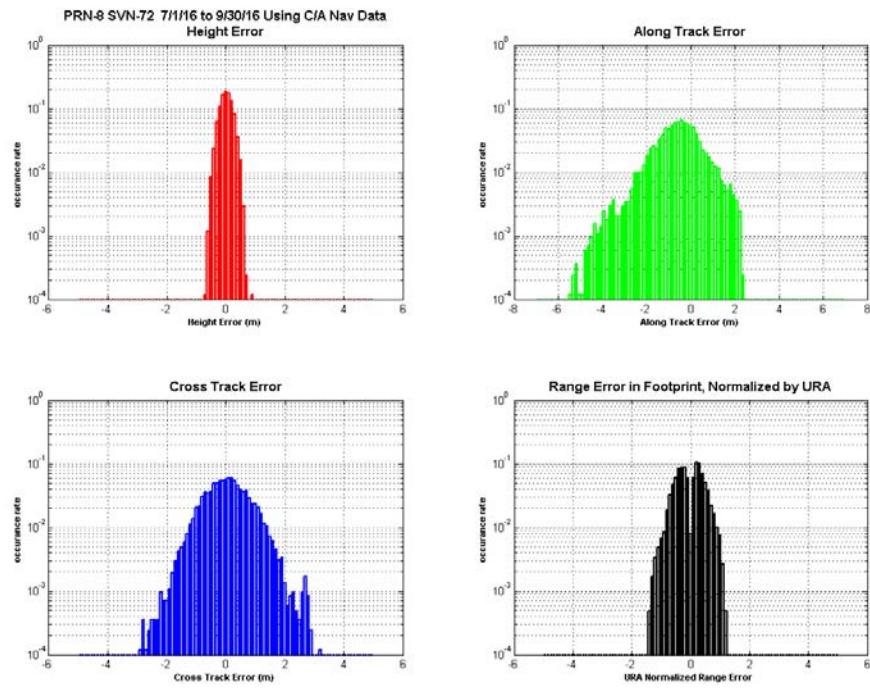
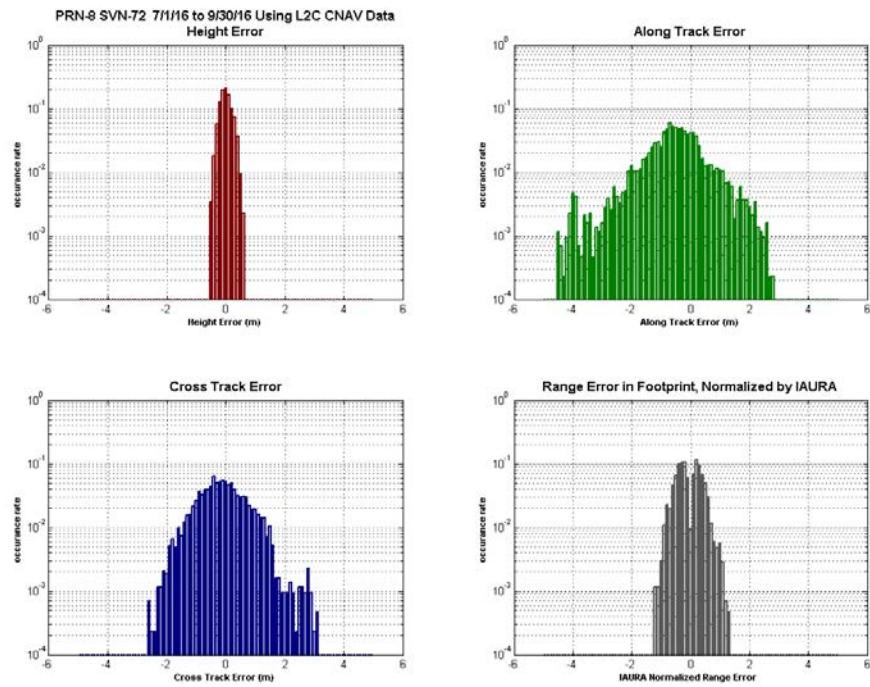
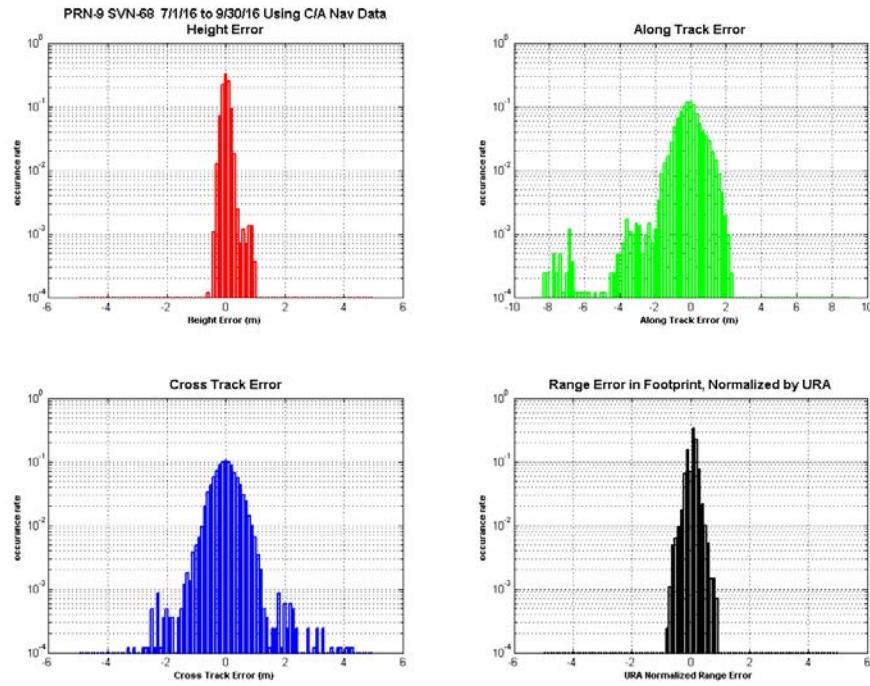
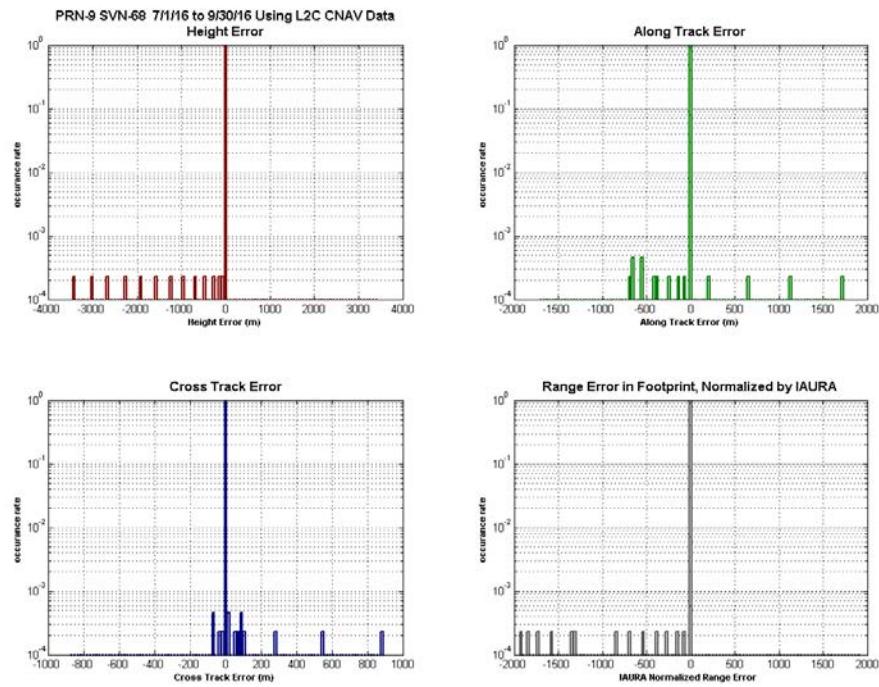
Figure 11-7.12, Histograms of H, A, C, and Range Error PRN-8 Using C/A Nav Data**Figure 11-7.13, Histograms of H, A, C, and Range Error PRN-8 Using L2C CNAV Data**

Figure 11-7.14, Histograms of H, A, C, and Range Error PRN-9 Using C/A Nav Data**Figure 11-7.15, Histograms of H, A, C, and Range Error PRN-9 Using L2C CNAV Data**

07/29 PRN-9
-3431.57 Height Error
after Delta V
NANU 2016050

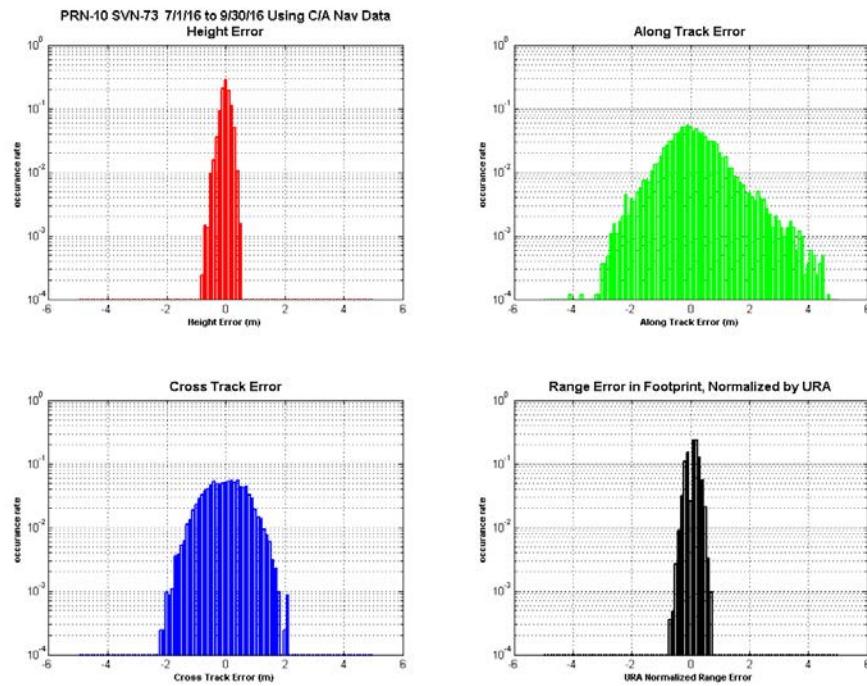
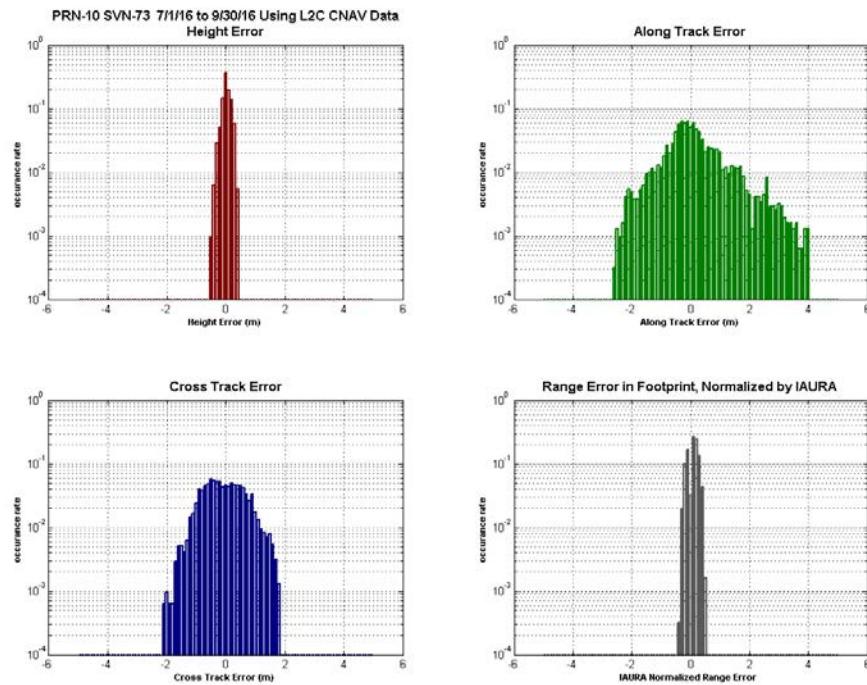
Figure 11-7.16, Histograms of H, A, C, and Range Error PRN-10 Using C/A Nav Data**Figure 11-7.17, Histograms of H, A, C, and Range Error PRN-10 Using L2C CNAV Data**

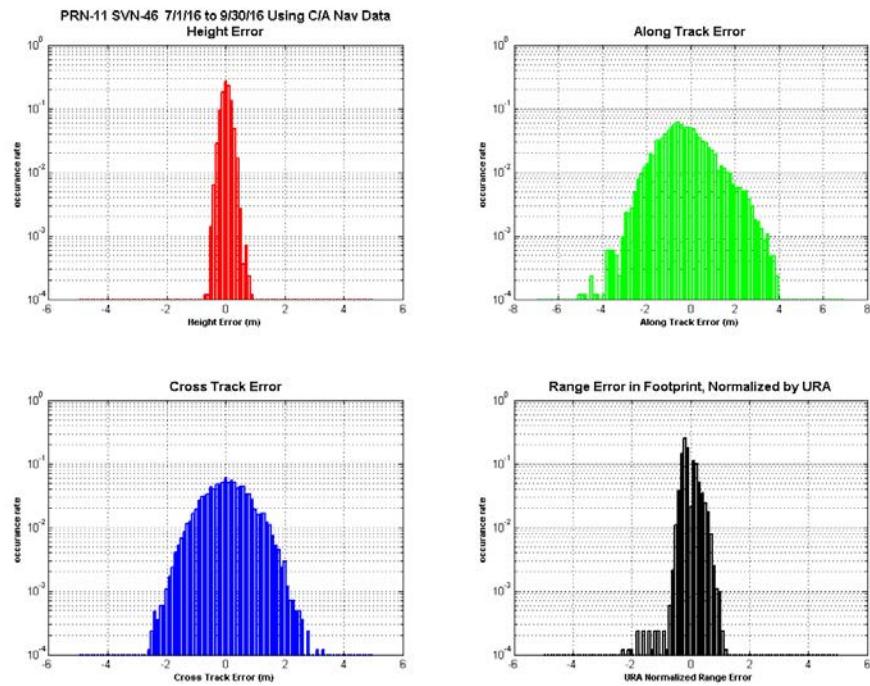
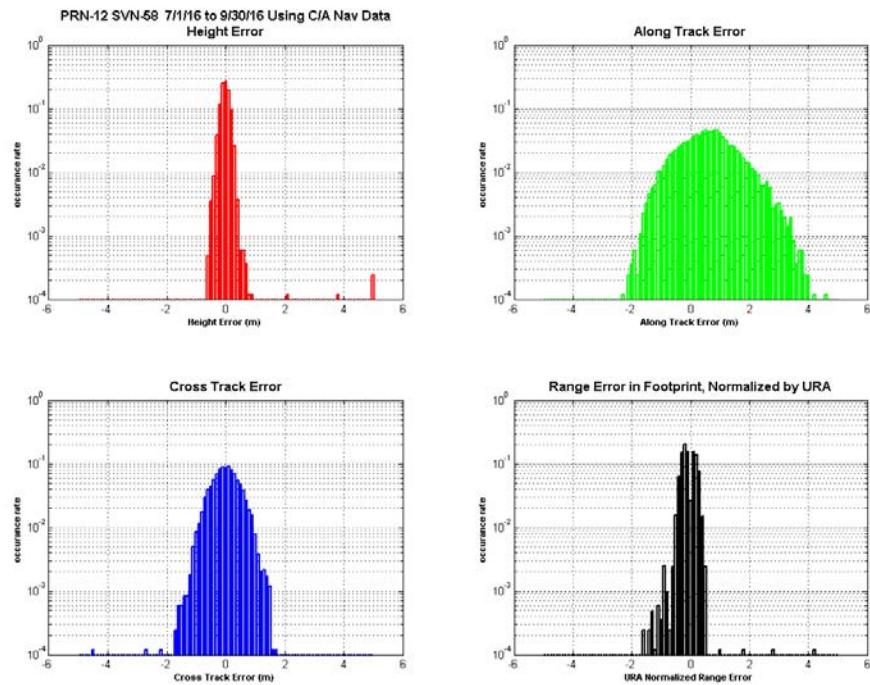
Figure 11-7.18, Histograms of H, A, C, and Range Error PRN-11 Using C/A Nav Data**Figure 11-7.19, Histograms of H, A, C, and Range Error PRN-12 Using C/A Nav Data**

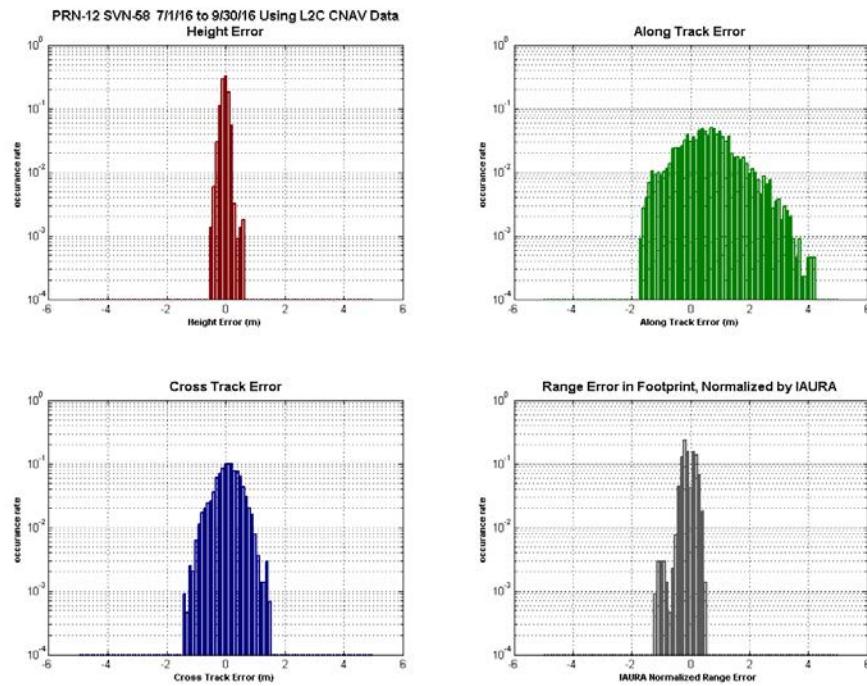
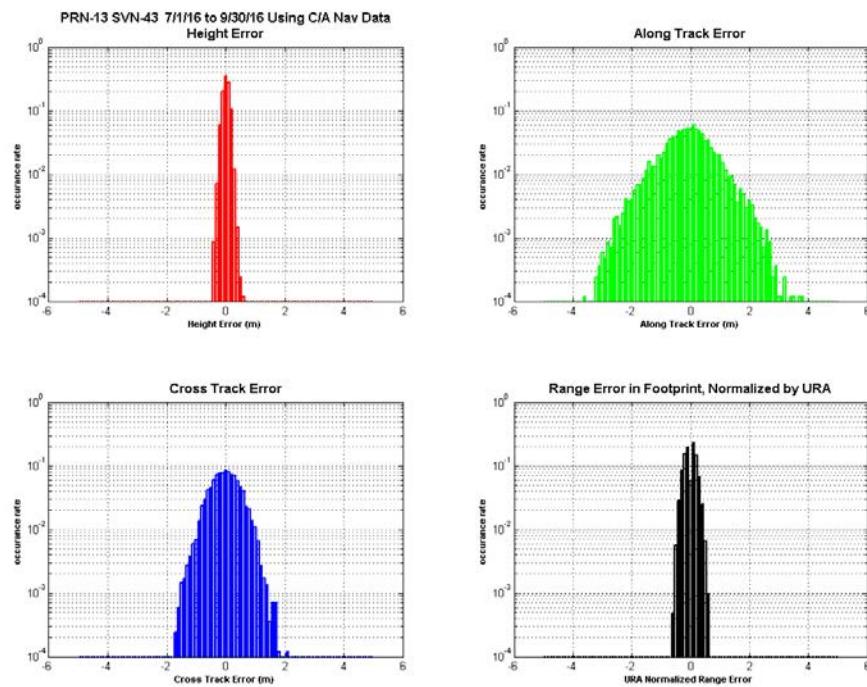
Figure 11-7.20, Histograms of H, A, C, and Range Error PRN-12 Using L2C CNAV Data**Figure 11-7.21, Histograms of H, A, C, and Range Error PRN-13 Using C/A Nav Data**

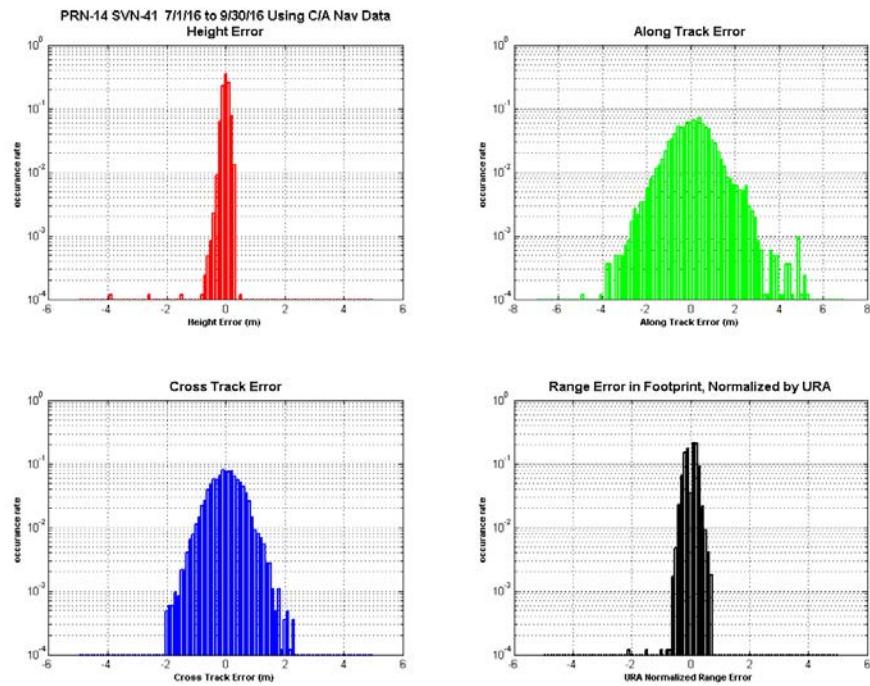
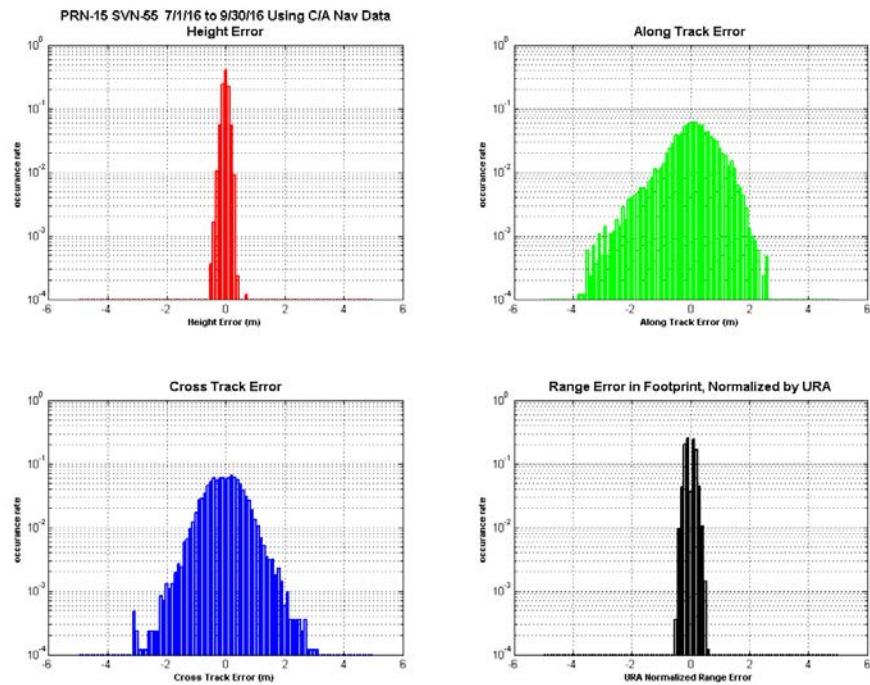
Figure 11-7.22, Histograms of H, A, C, and Range Error PRN-14 Using C/A Nav Data**Figure 11-7.23, Histograms of H, A, C, and Range Error PRN-15 Using C/A Nav Data**

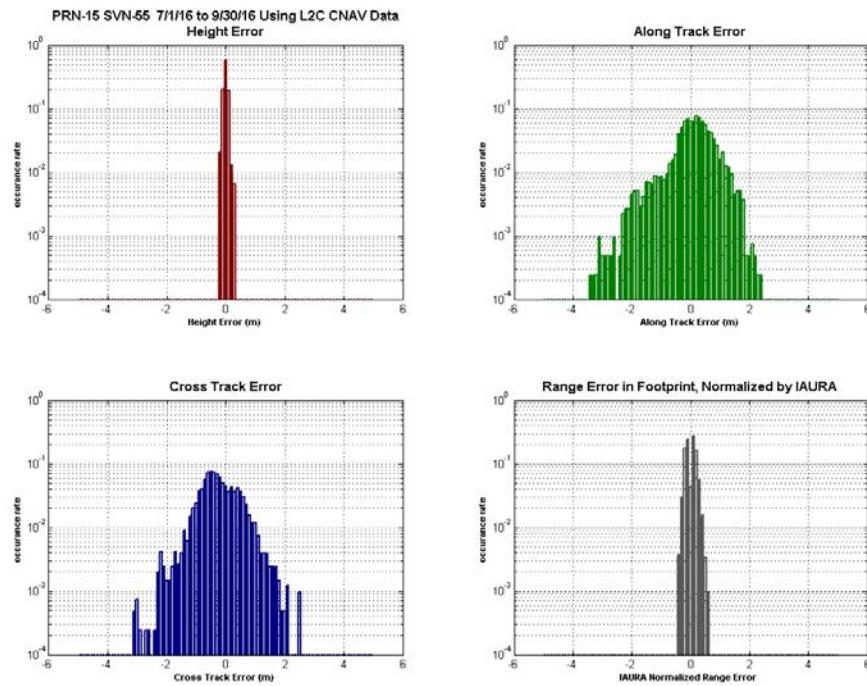
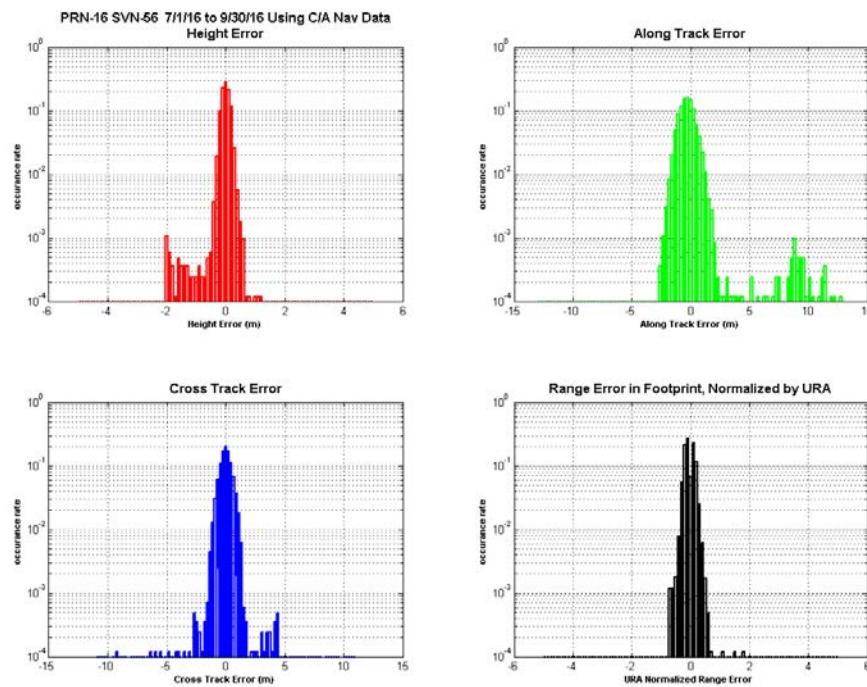
Figure 11-7.24, Histograms of H, A, C, and Range Error PRN-15 Using L2C CNAV Data**Figure 11-7.25, Histograms of H, A, C, and Range Error PRN-16 Using C/A Nav Data**

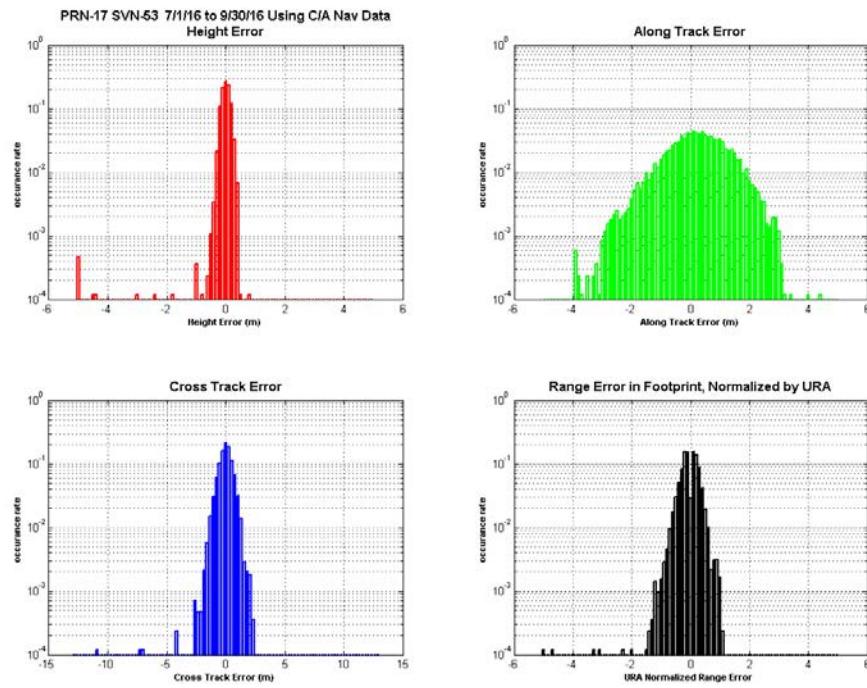
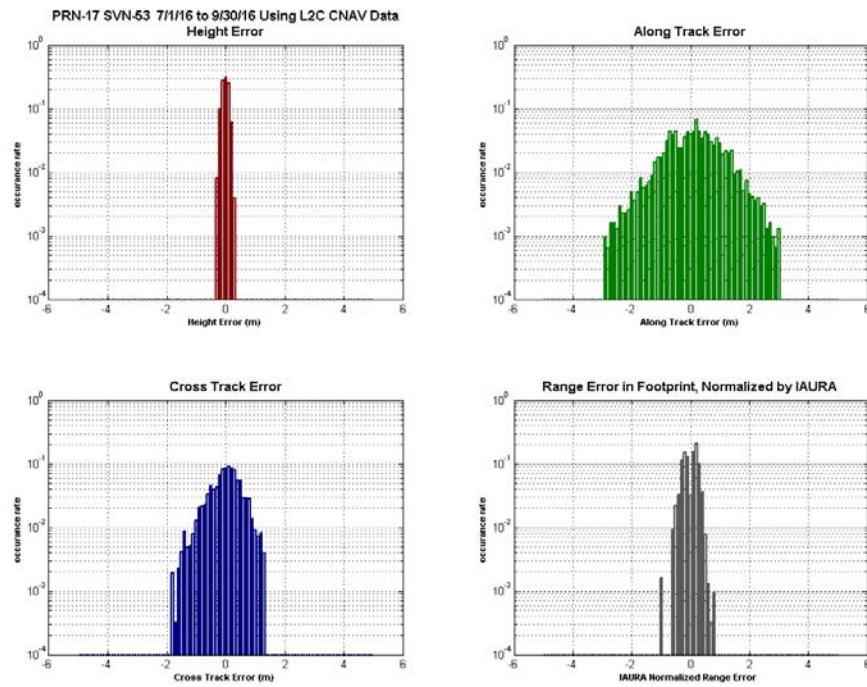
Figure 11-7.26, Histograms of H, A, C, and Range Error PRN-17 Using C/A Nav Data**Figure 11-7.27 Histograms of H, A, C, and Range Error PRN-17 Using L2C CNAV Data**

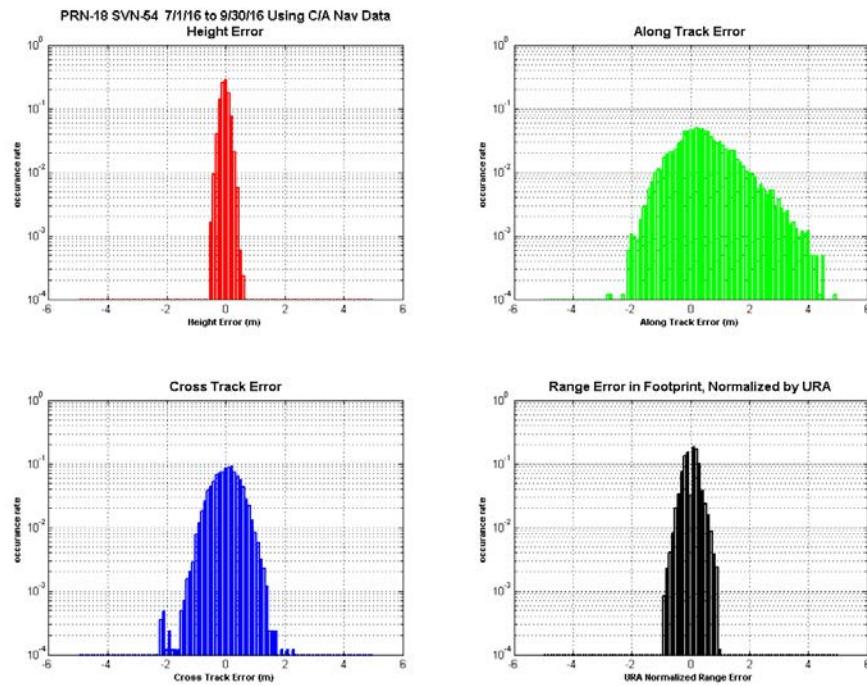
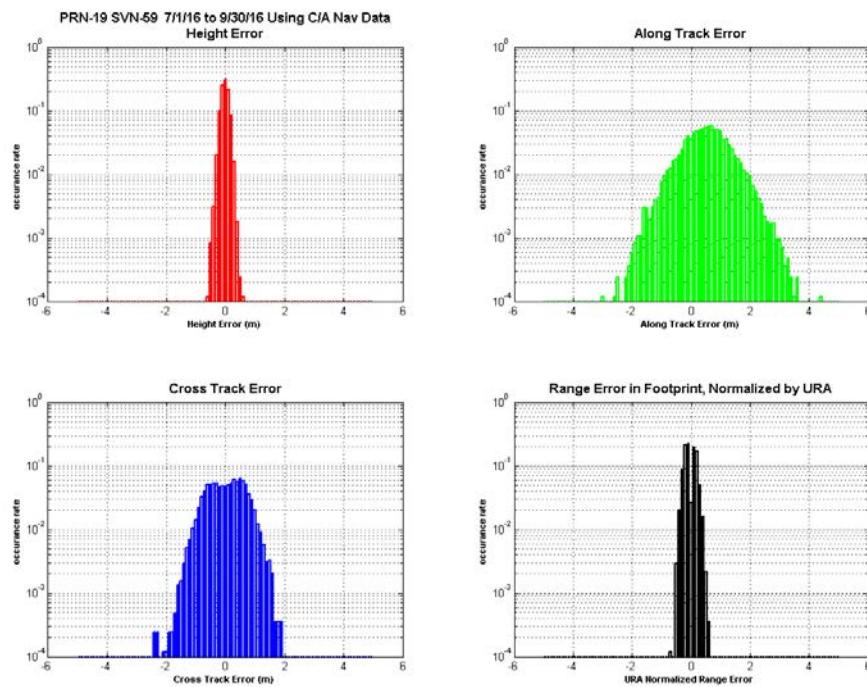
Figure 11-7.28, Histograms of H, A, C, and Range Error PRN-18 Using C/A Nav Data**Figure 11-7.29, Histograms of H, A, C, and Range Error PRN-19 Using C/A Nav Data**

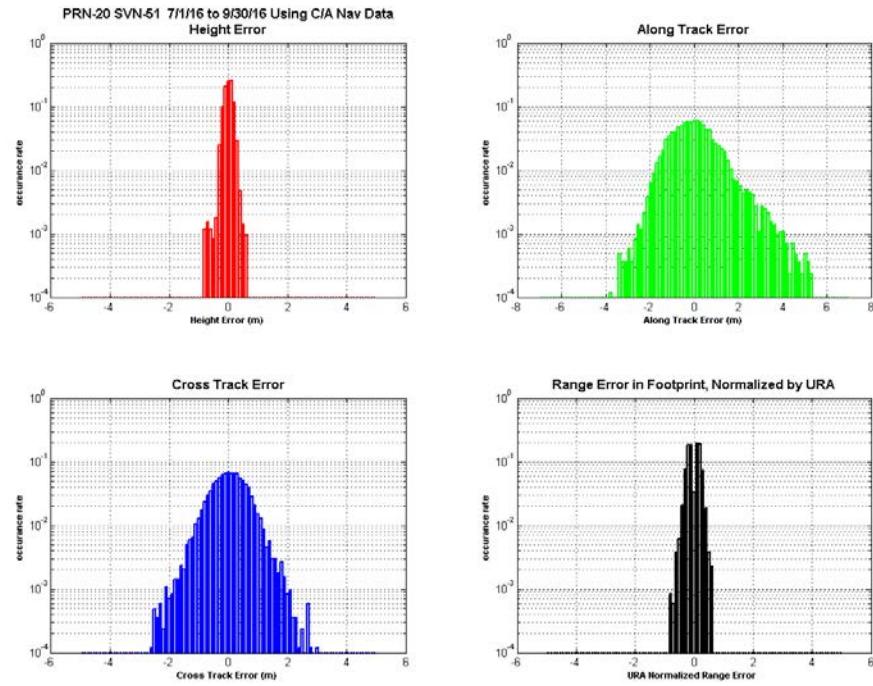
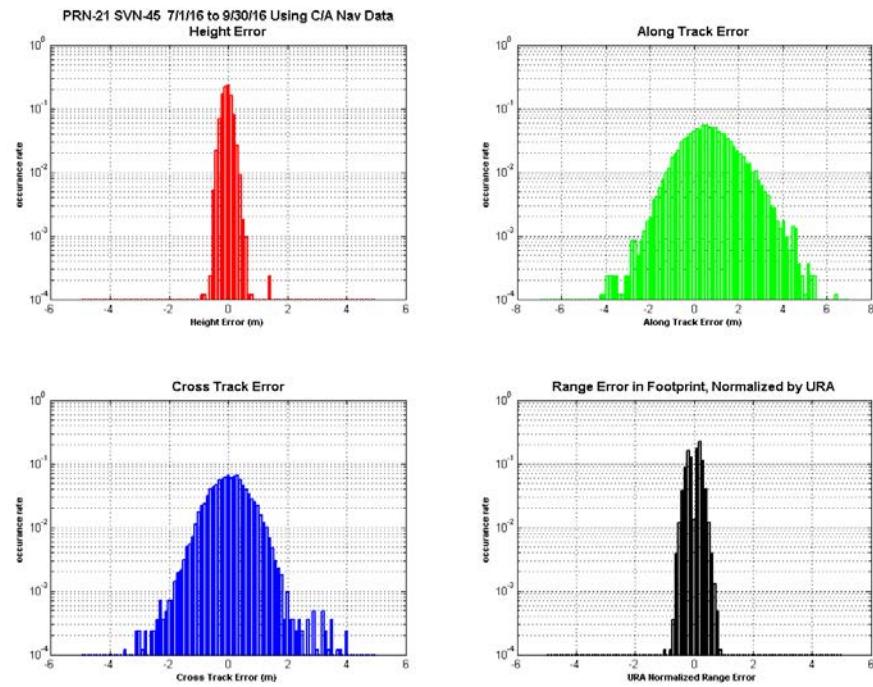
Figure 11-7.30, Histograms of H, A, C, and Range Error PRN-20 Using C/A Nav Data**Figure 11-7.31, Histograms of H, A, C, and Range Error PRN-21 Using C/A Nav Data**

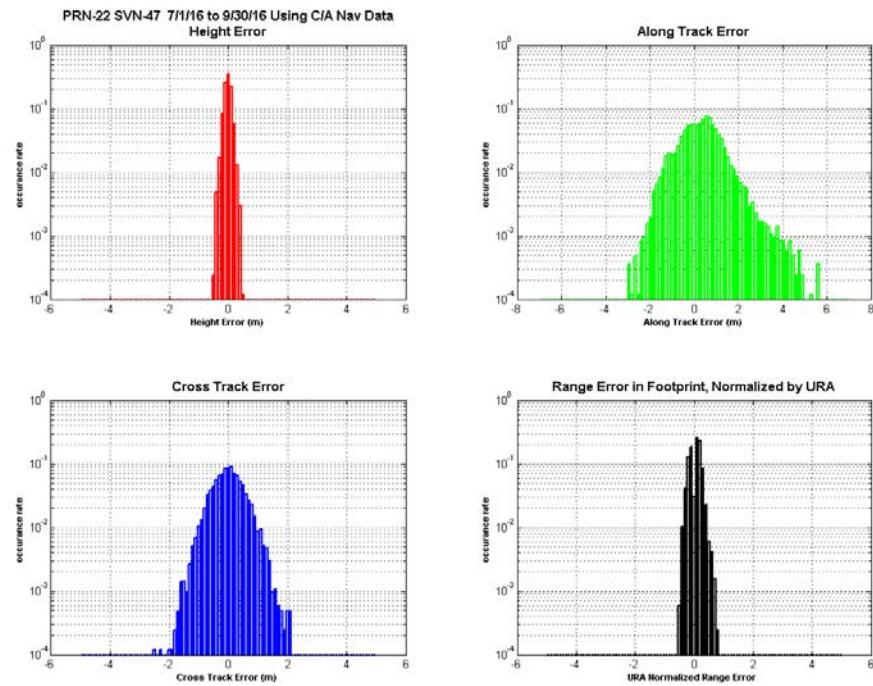
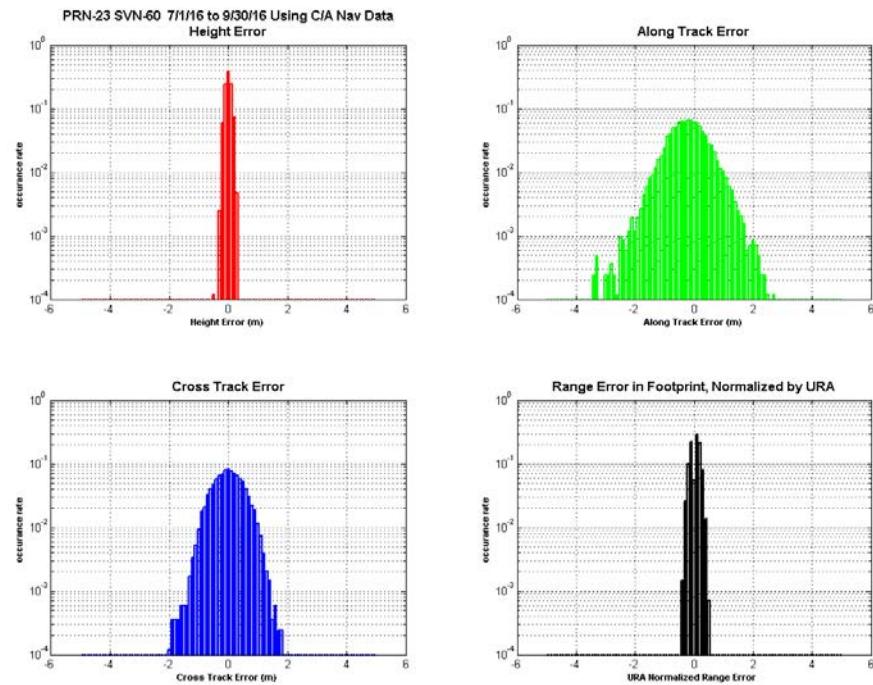
Figure 11-7.32, Histograms of H, A, C, and Range Error PRN-22 Using C/A Nav Data**Figure 11-7.33, Histograms of H, A, C, and Range Error PRN-23 Using C/A Nav Data**

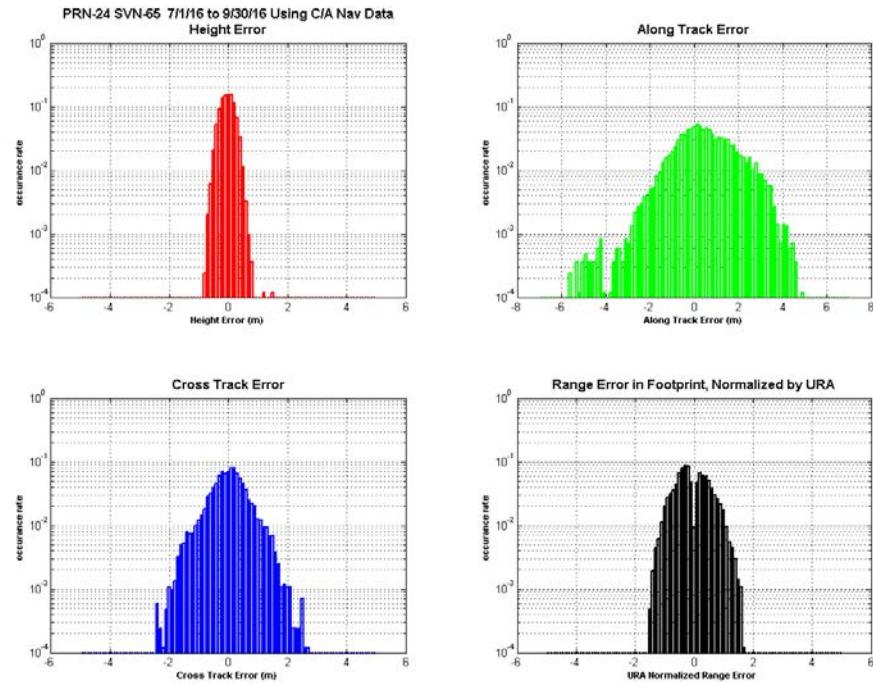
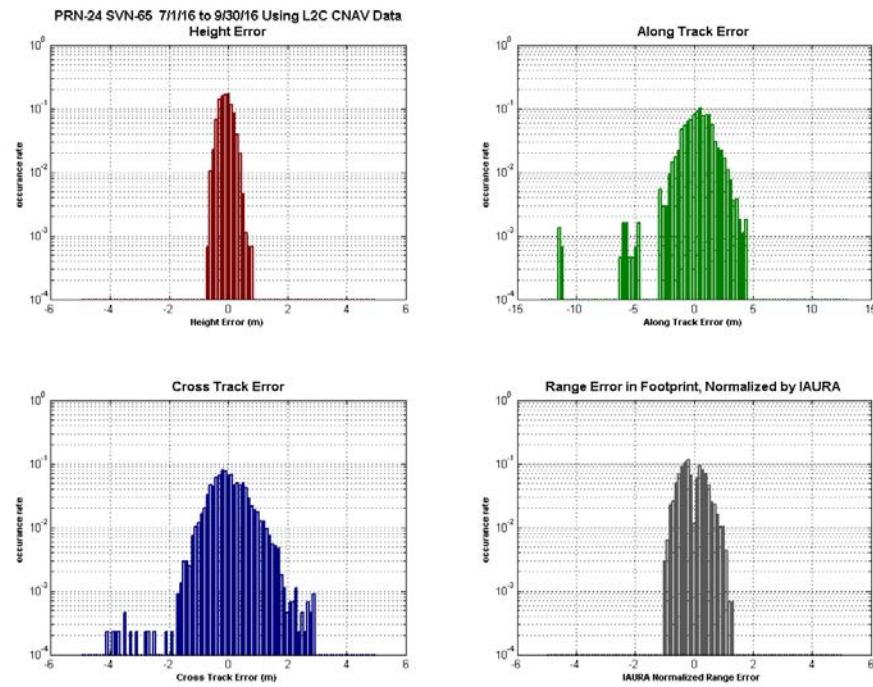
Figure 11-7.34, Histograms of H, A, C, and Range Error PRN-24 Using C/A Nav Data**Figure 11-7.35, Histograms of H, A, C, and Range Error PRN-24 Using L2C CNAV Data**

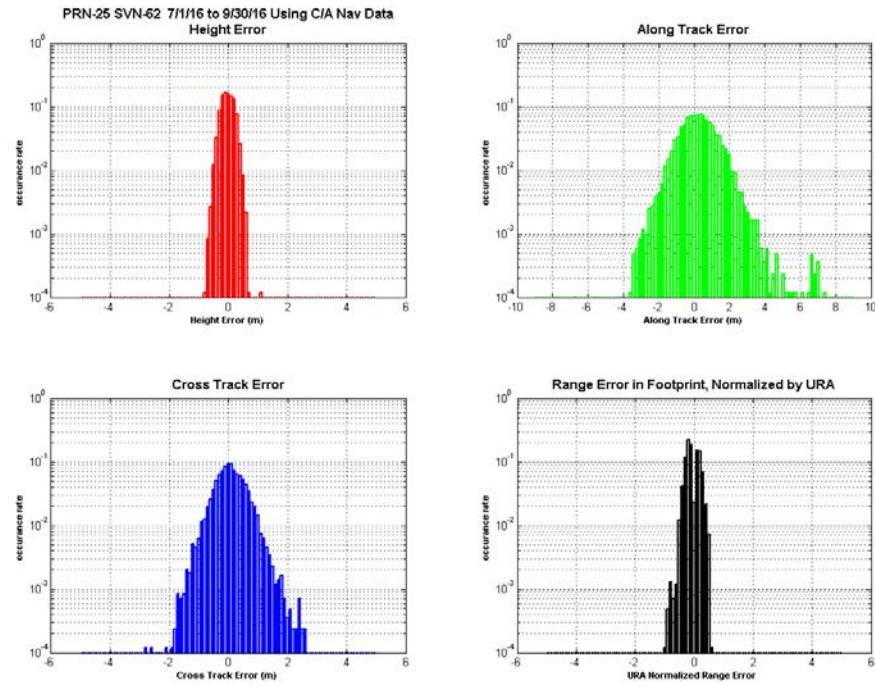
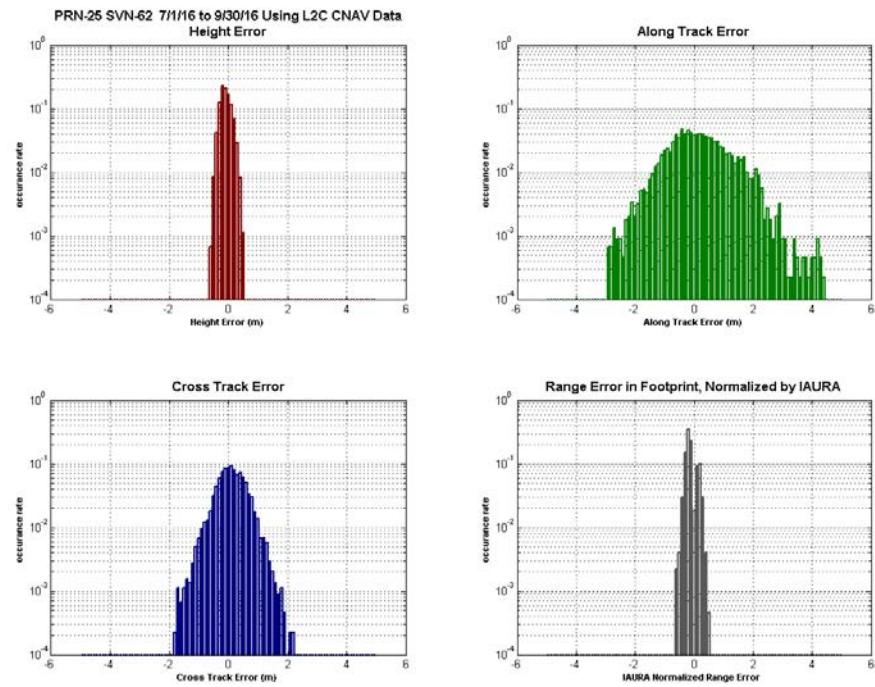
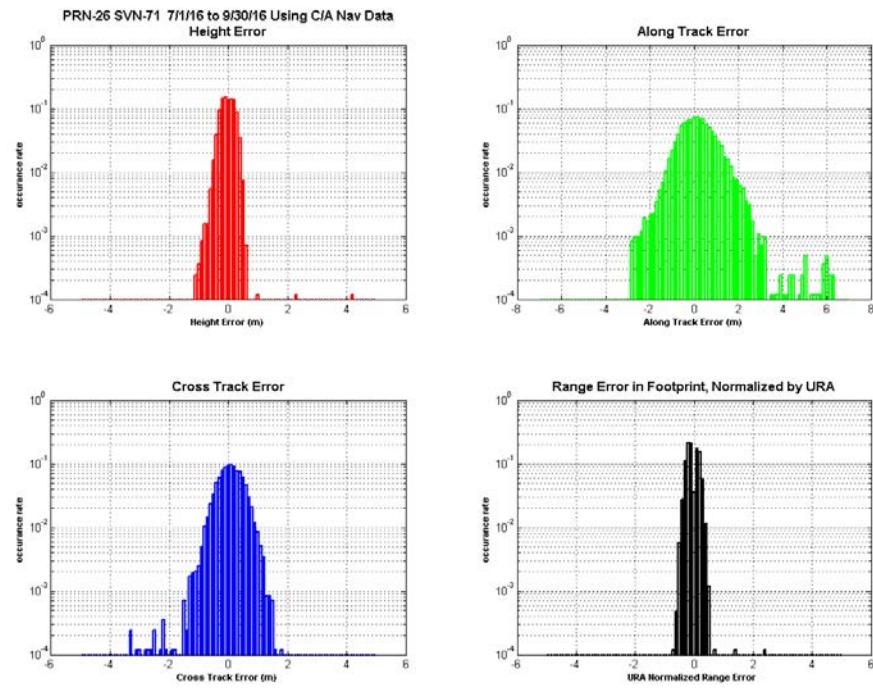
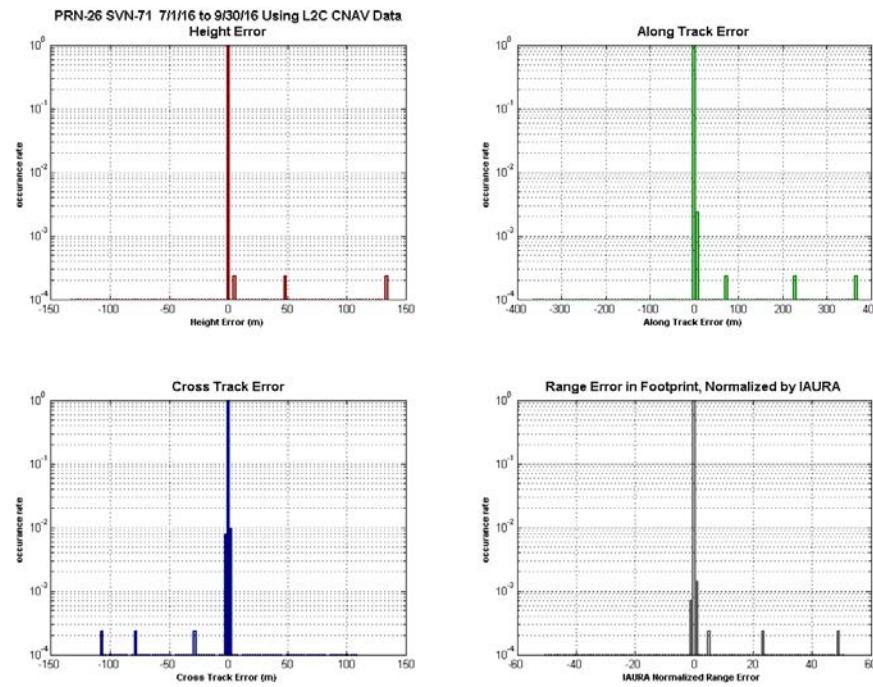
Figure 11-7.36, Histograms of H, A, C, and Range Error PRN-25 Using C/A Nav Data**Figure 11-7.37, Histograms of H, A, C, and Range Error PRN-25 Using L2C CNAV Data**

Figure 11-7.38, Histograms of H, A, C, and Range Error PRN-26 Using C/A Nav Data**Figure 11-7.39, Histograms of H, A, C, and Range Error PRN-26 Using L2C CNAV Data**

07/22 PRN-26
132.83 Height Error
after Delta V
NANU 2016048

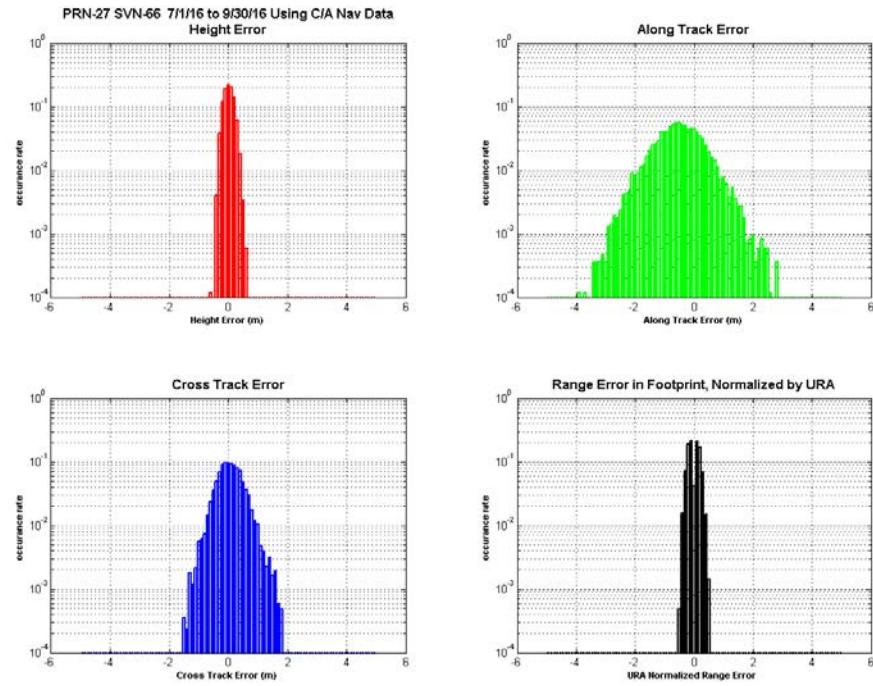
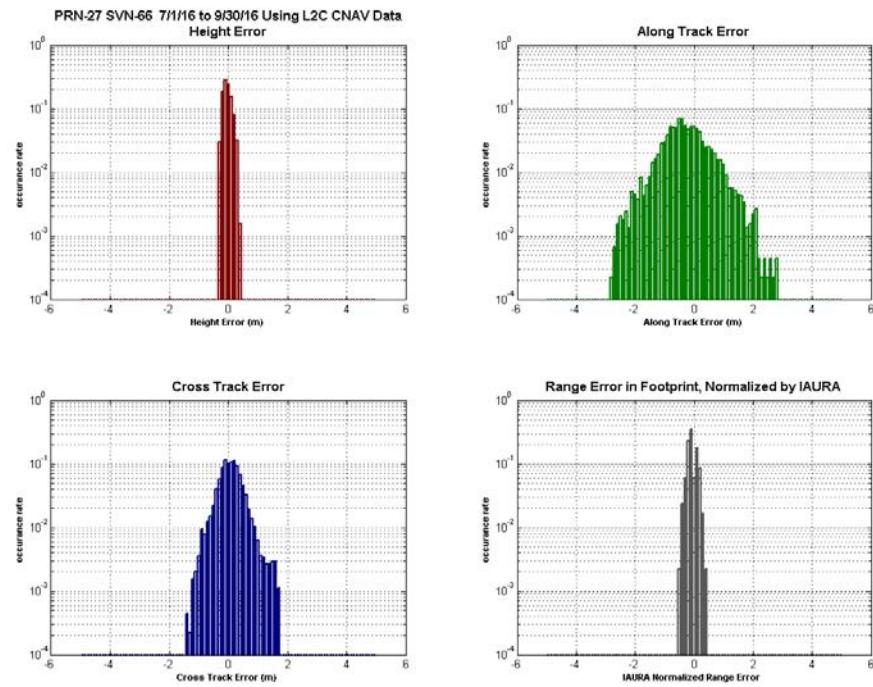
Figure 11-7.40, Histograms of H, A, C, and Range Error PRN-27 Using C/A Nav Data**Figure 11-7.41, Histograms of H, A, C, and Range Error PRN-27 Using L2C CNAV Data**

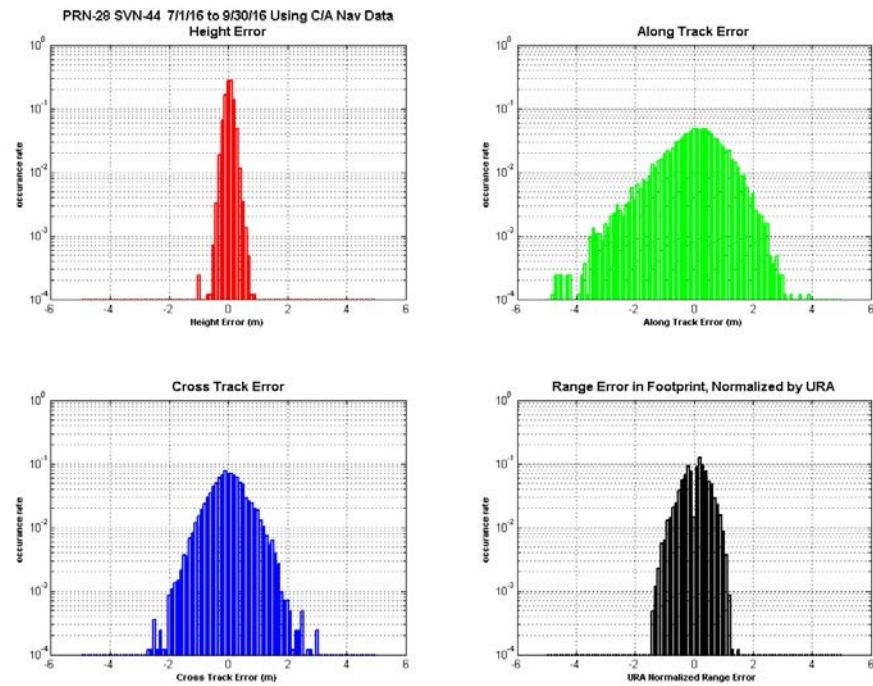
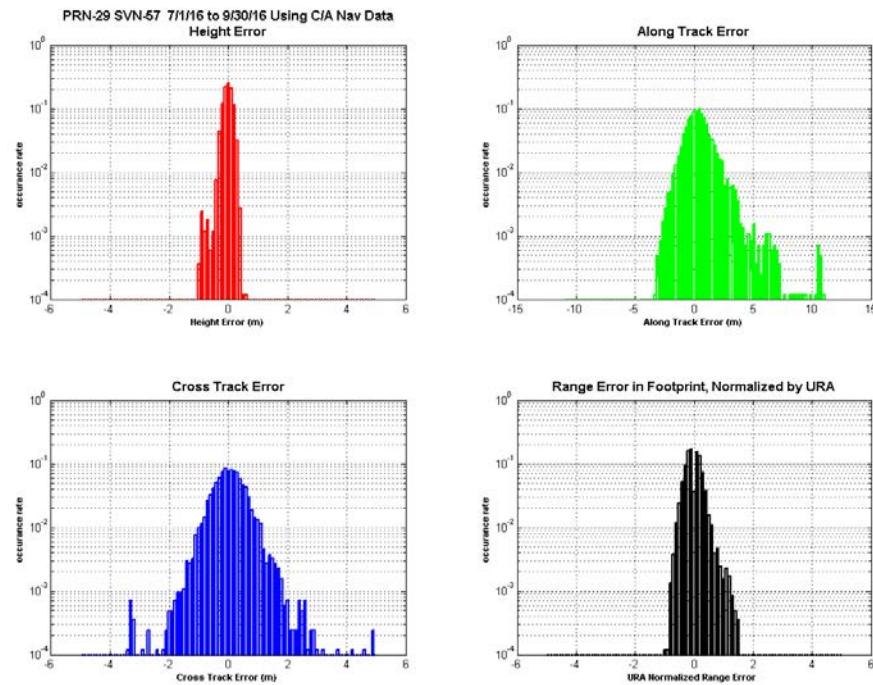
Figure 11-7.42, Histograms of H, A, C, and Range Error PRN-28 Using C/A Nav Data**Figure 11-7.43, Histograms of H, A, C, and Range Error PRN-29 Using C/A Nav Data**

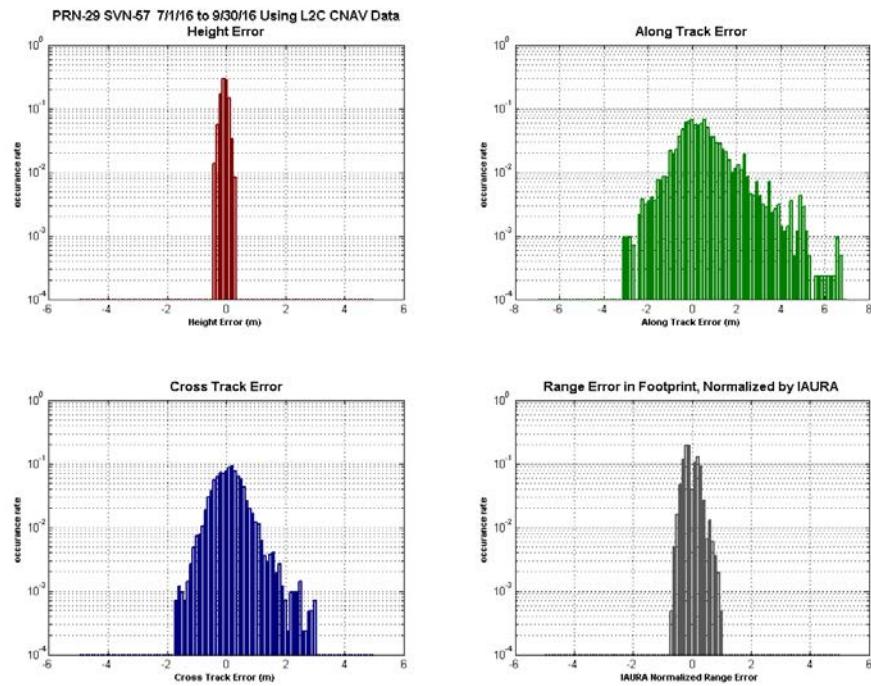
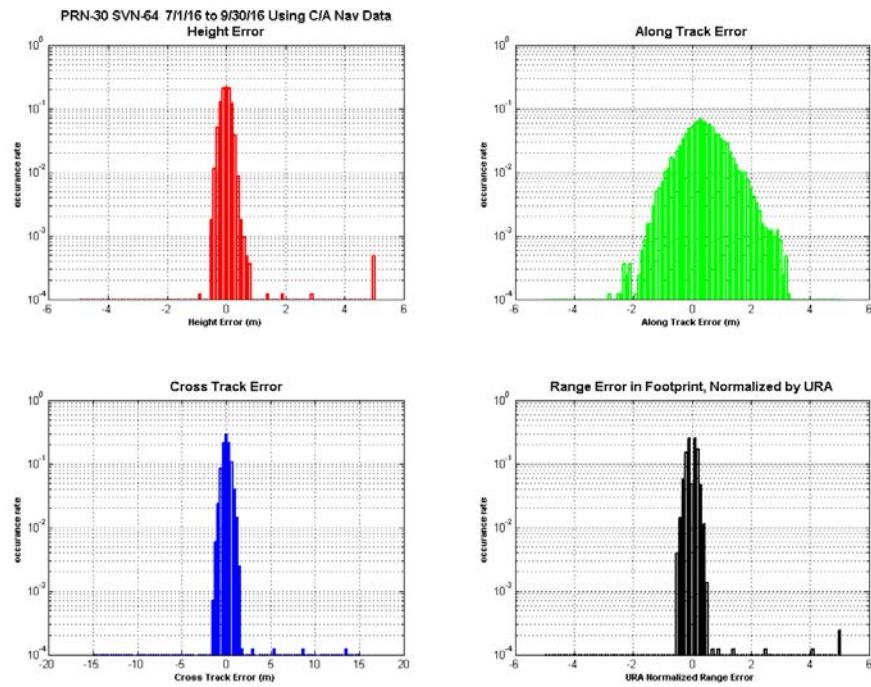
Figure 11-7.44, Histograms of H, A, C, and Range Error PRN-29 Using L2C CNAV Data**Figure 11-7.45, Histograms of H, A, C, and Range Error PRN-30 Using C/A Nav Data**

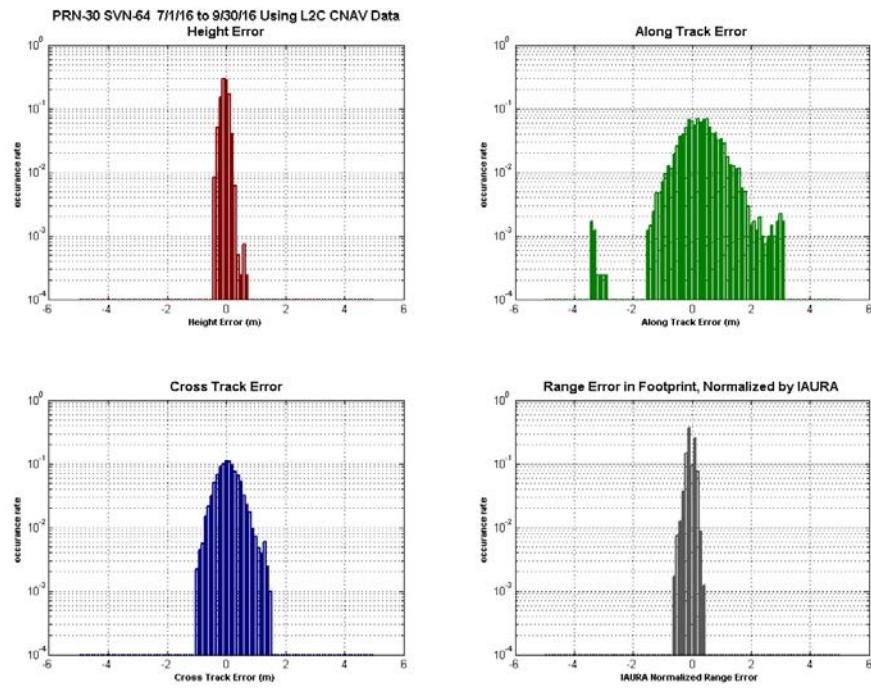
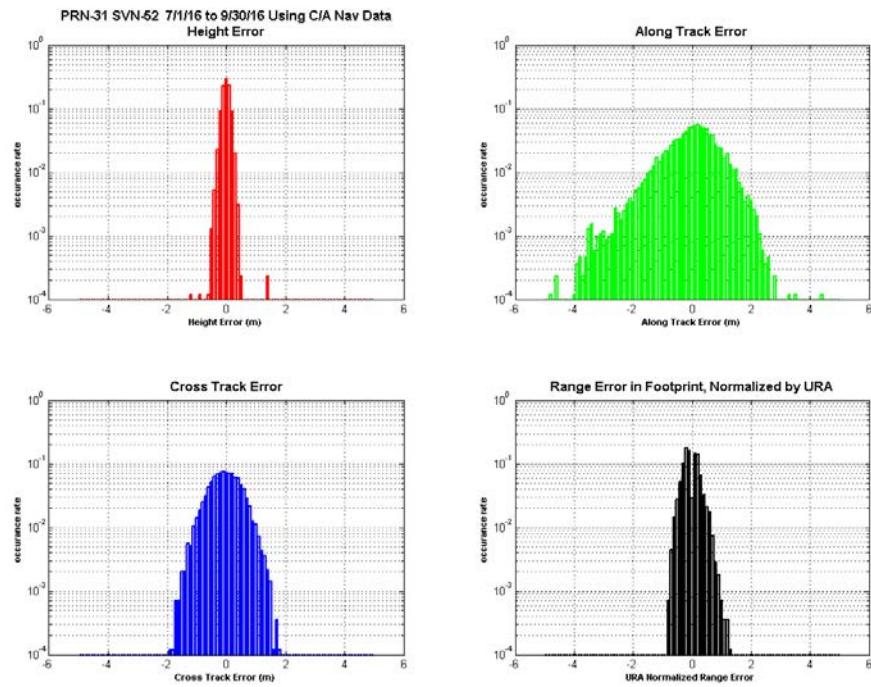
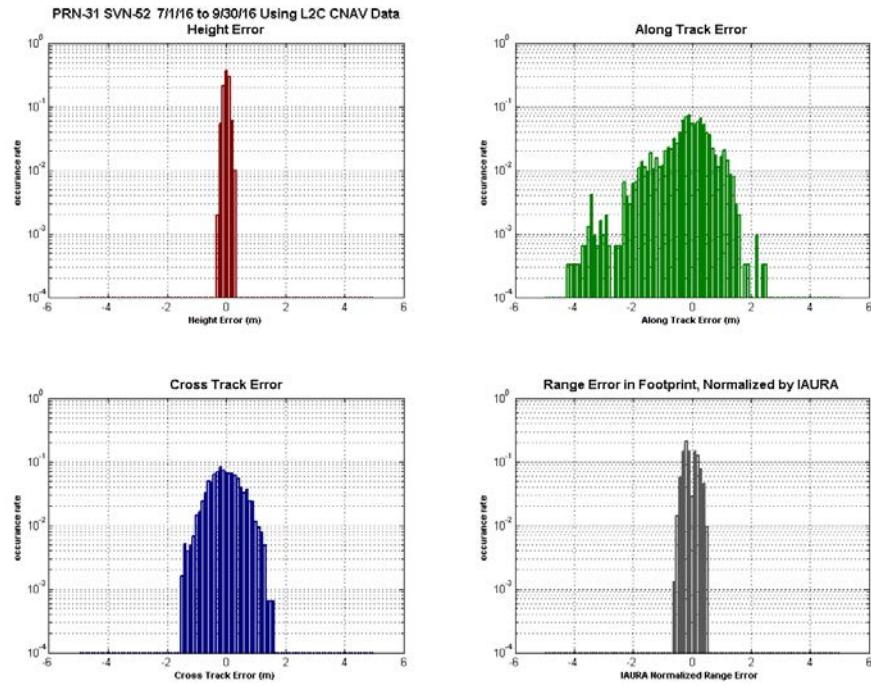
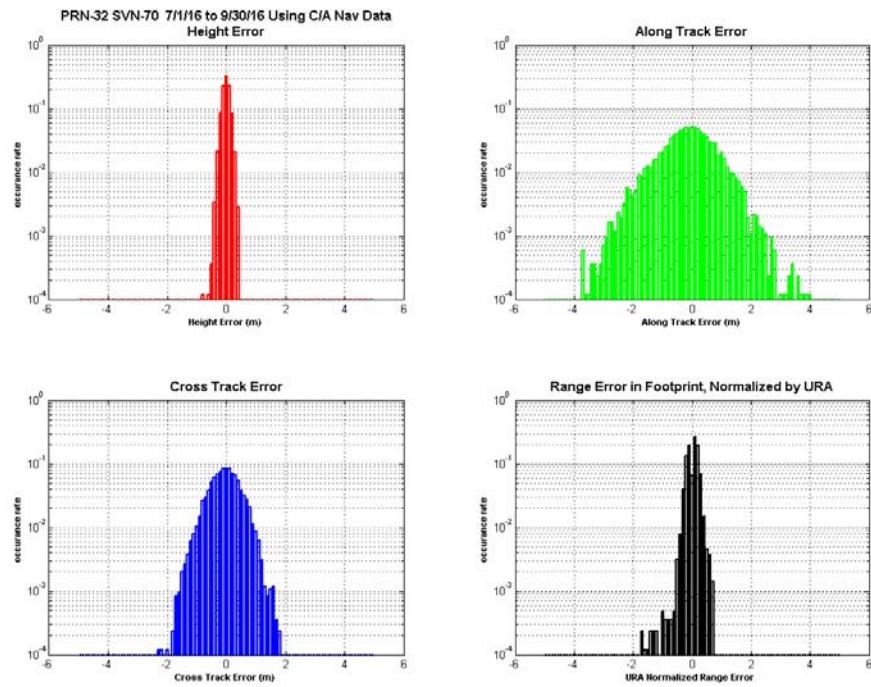
Figure 11-7.46, Histograms of H, A, C, and Range Error PRN-30 Using L2C CNAV Data**Figure 11-7.47, Histograms of H, A, C, and Range Error PRN-31 Using C/A Nav Data**

Figure 11-7.48, Histograms of H, A, C, and Range Error PRN-31 Using L2C CNAV Data**Figure 11-7.49, Histograms of H, A, C, and Range Error PRN-32 Using C/A Nav Data****Figure 11-7.50, Histograms of H, A, C, and Range Error PRN-32 Using L2C CNAV Data**

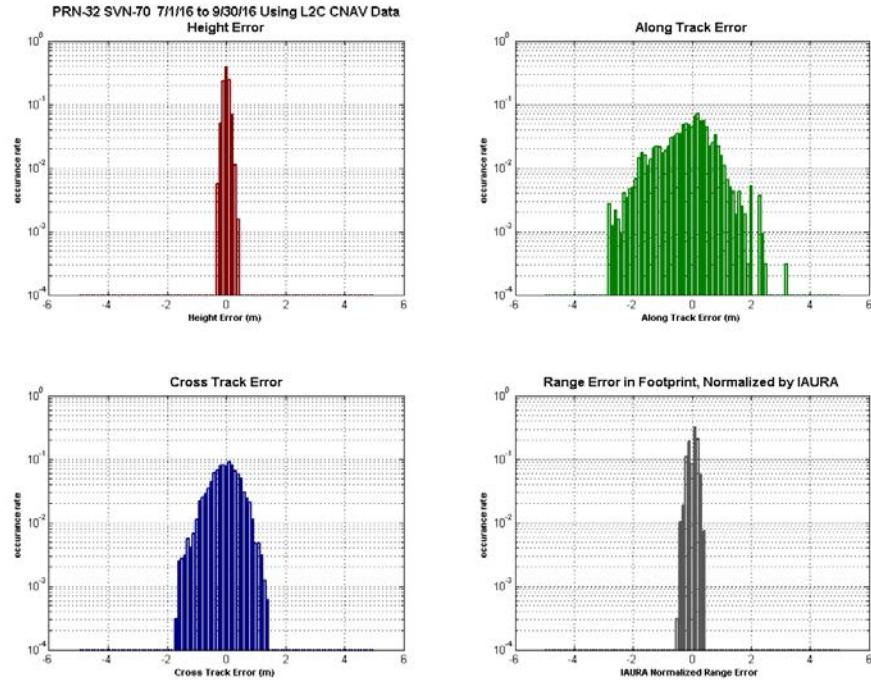
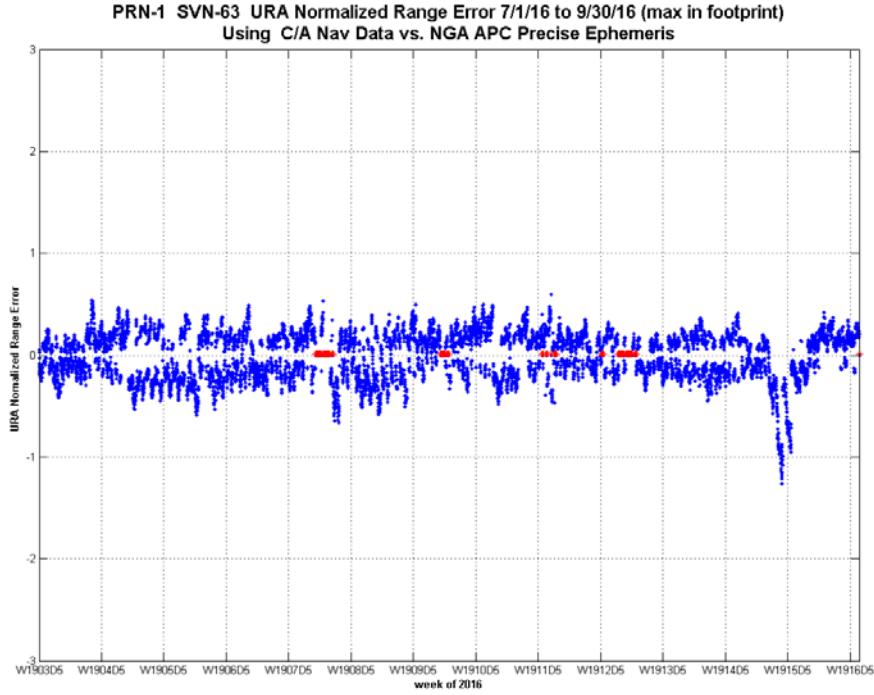
**Figure 11-8 Timeline of URA Normalized Range Error for All Satellites****Figure 11-8.1 Timeline of URA Normalized Range Error PRN-1 SVN-63 Using C/A Nav Data**

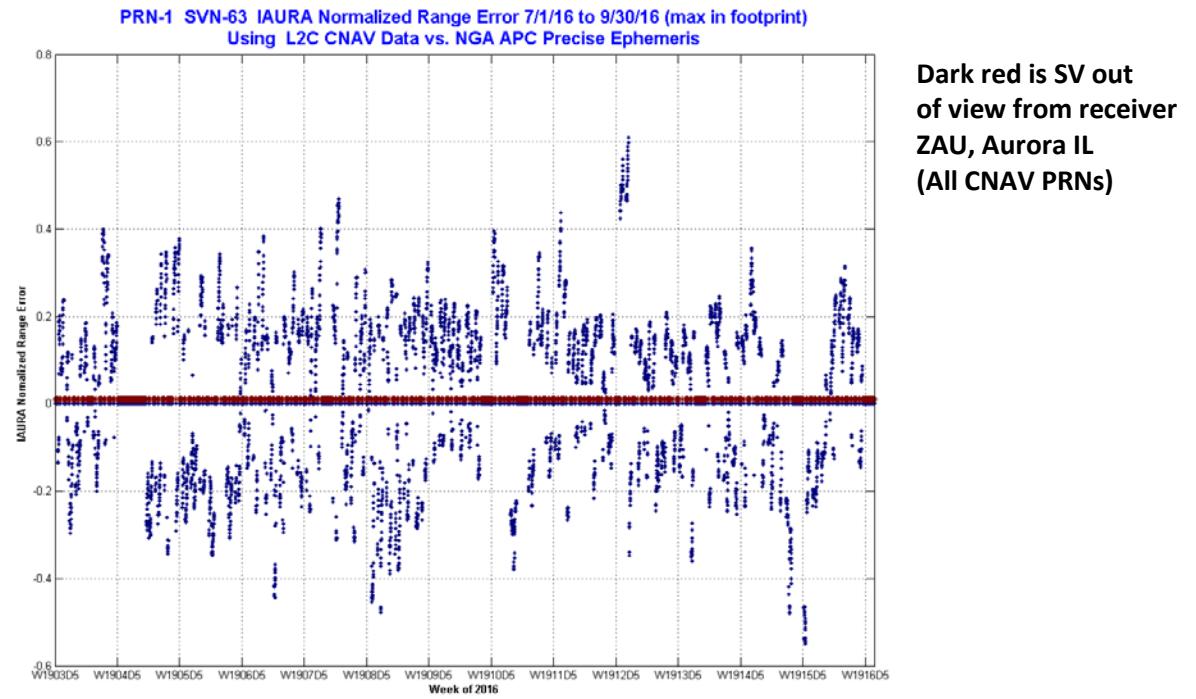
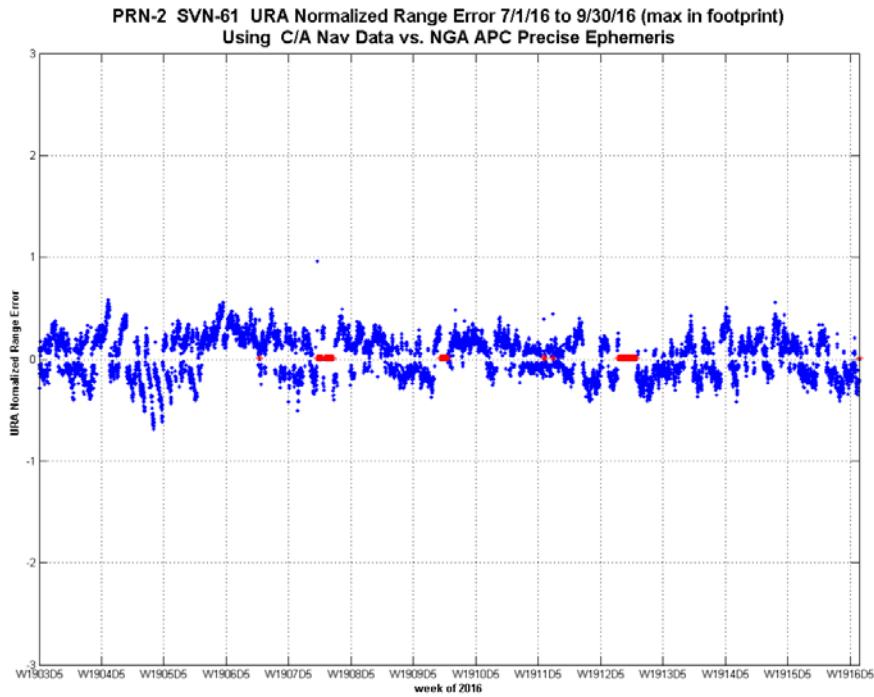
Figure 11-8.2 Timeline of IAURA Normalized Range Error PRN-1 SVN-63 Using L2C CNAV Data**Figure 11-8.3, Timeline of URA Normalized Range Error PRN-2 SVN-61 Using C/A Nav Data**

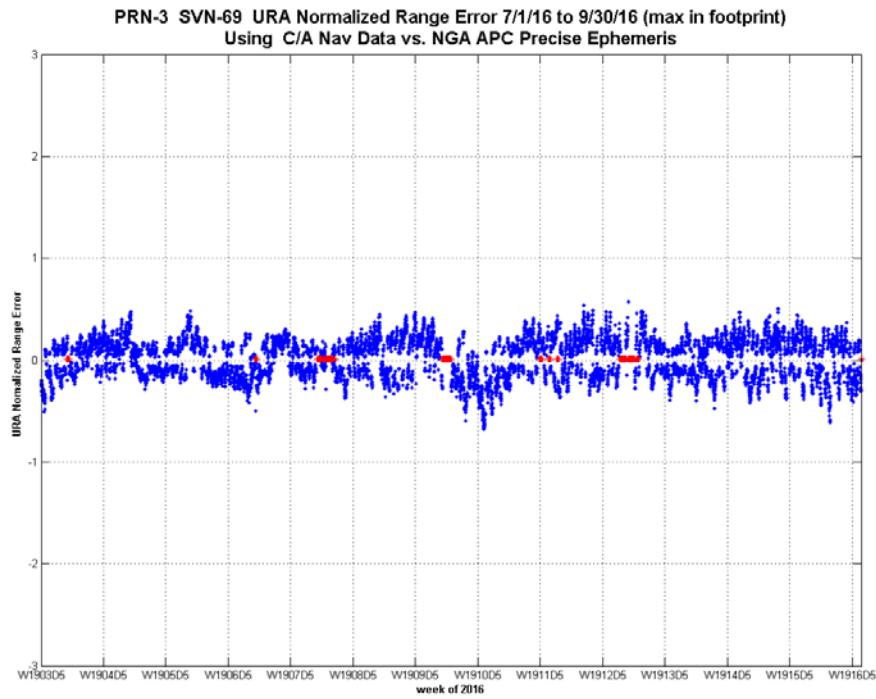
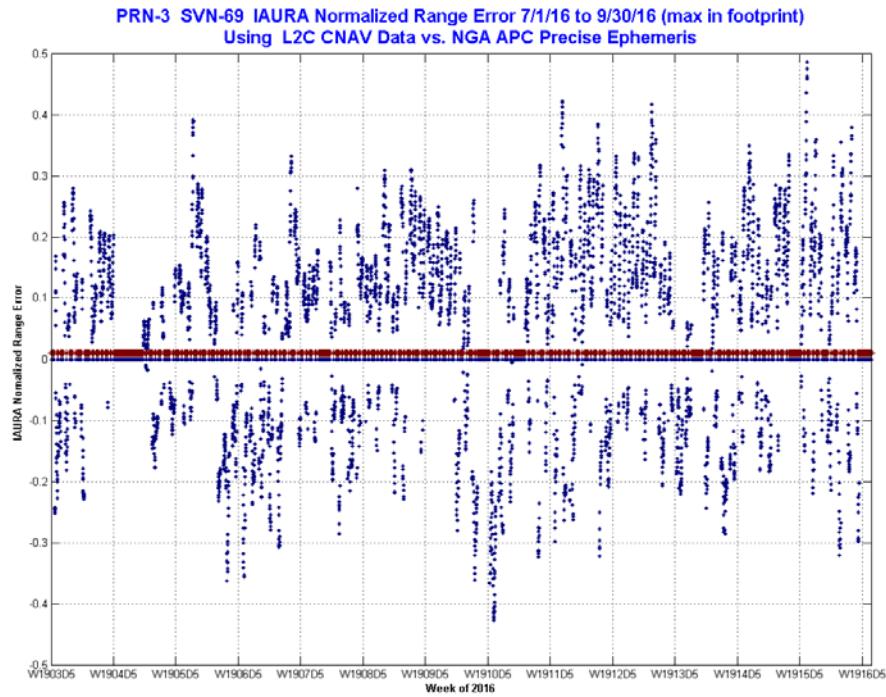
Figure 11-8.4, Timeline of URA Normalized Range Error PRN-3 SVN-69 Using C/A Nav Data**Figure 11-8.5, Timeline of IAURA Normalized Range Error PRN-3 SVN-69 Using L2C CNAV Data**

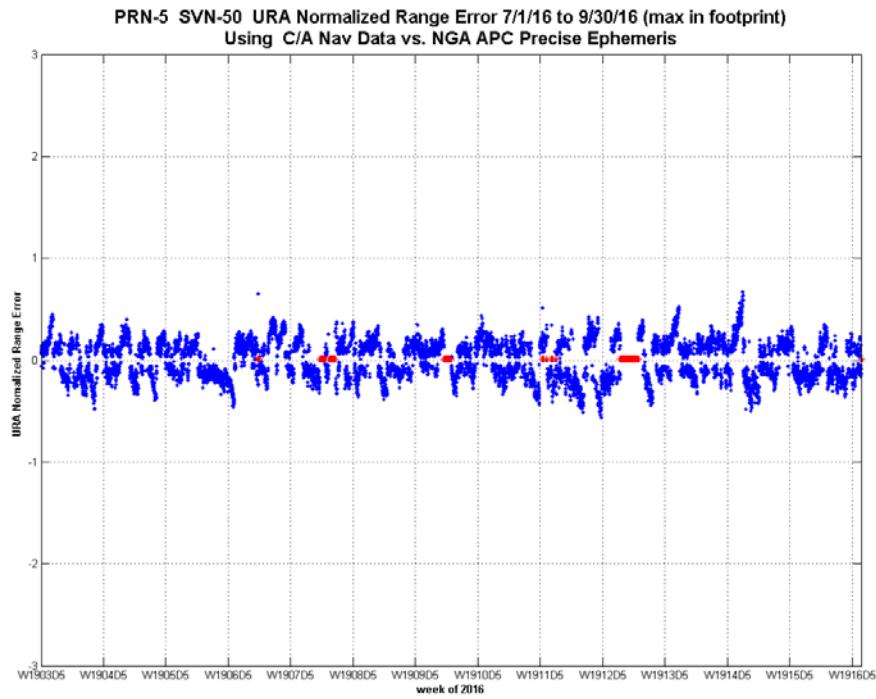
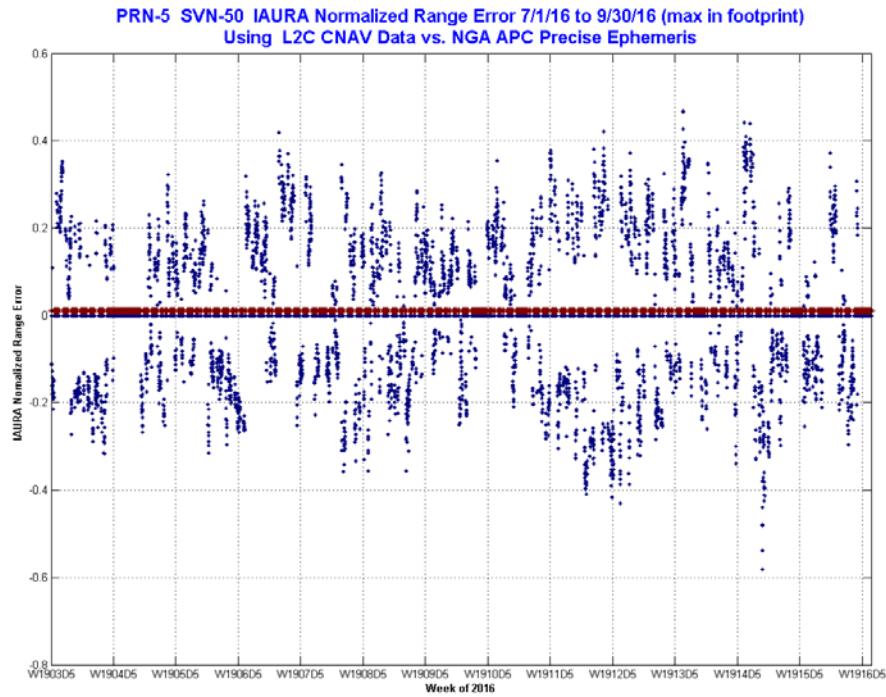
Figure 11-8.6, Timeline of URA Normalized Range Error PRN-5 SVN-50 Using C/A Nav Data**Figure 11-8.7, Timeline of IAURA Normalized Range Error PRN-5 SVN-50 Using L2C CNAV Data**

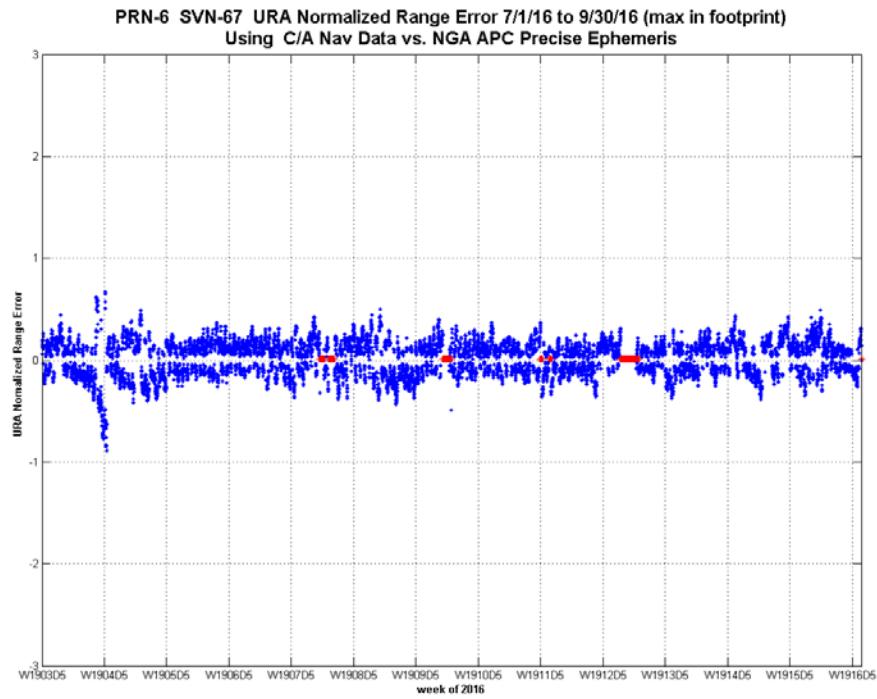
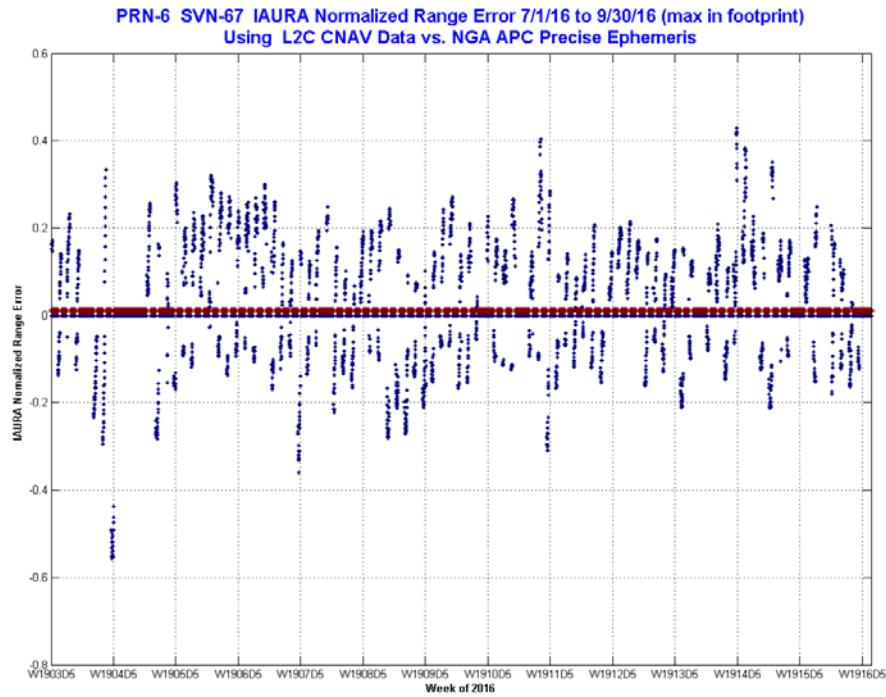
Figure 11-8.8, Timeline of URA Normalized Range Error PRN-6 SVN-67 Using C/A Nav Data**Figure 11-8.9, Timeline of IAURA Normalized Range Error PRN-6 SVN-67 Using L2C CNAV Data**

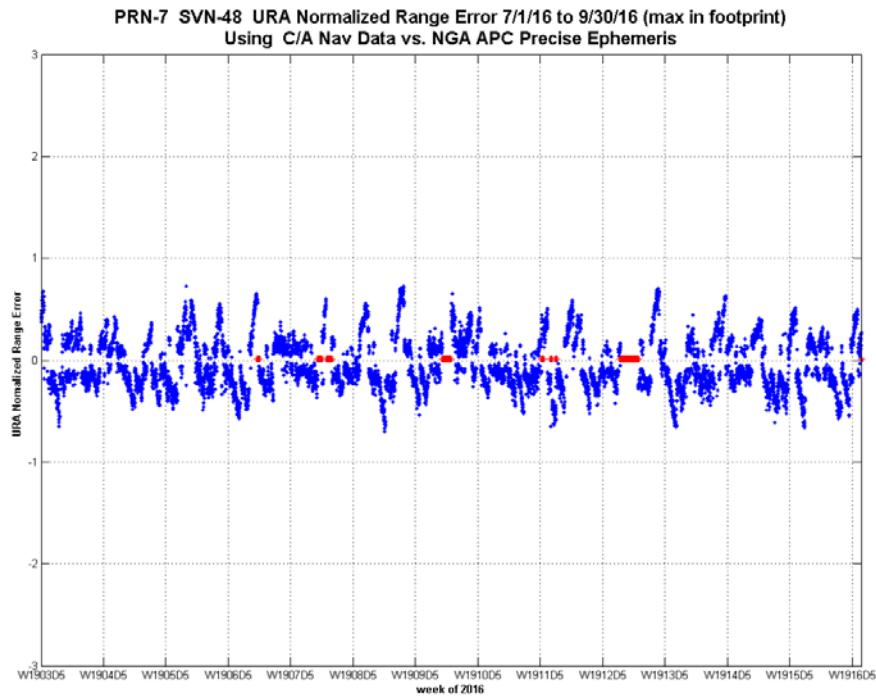
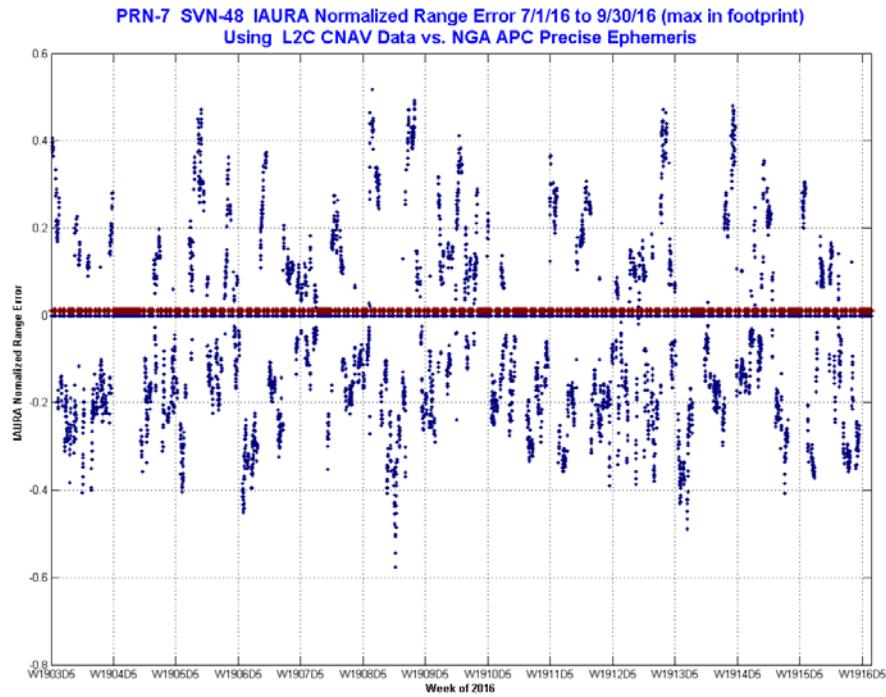
Figure 11-8.10, Timeline of URA Normalized Range Error PRN-7 SVN-48 Using C/A Nav Data**Figure 11-8.11, Timeline of IAURA Normalized Range Error PRN-7 SVN-48 Using L2C CNAV Data**

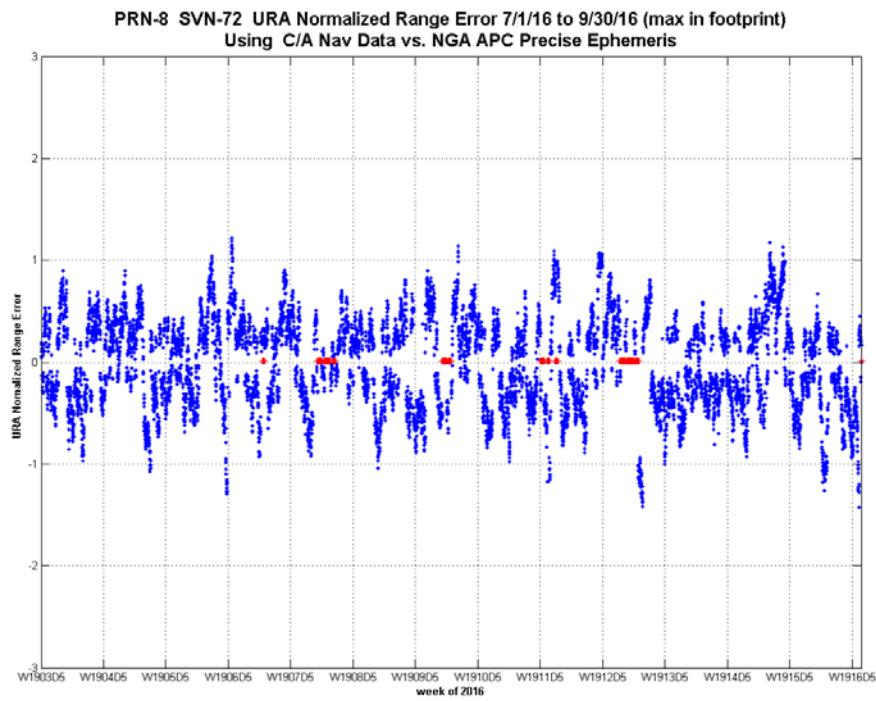
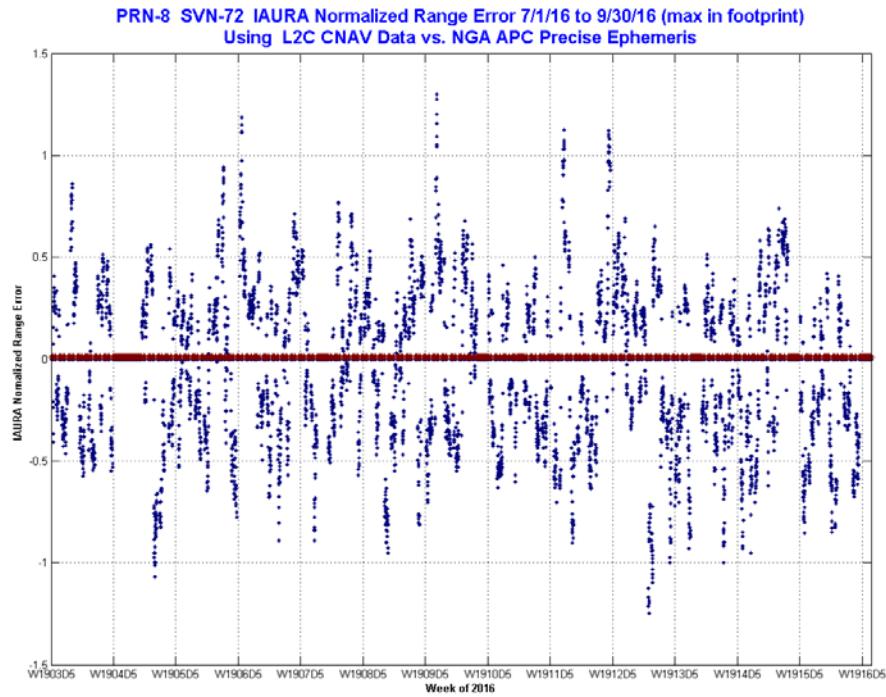
Figure 11-8.12, Timeline of URA Normalized Range Error PRN-8 SVN-72 Using C/A Nav Data**Figure 11-8.13, Timeline of IAURA Normalized Range Error PRN-8 SVN-72 Using L2C CNAV Data**

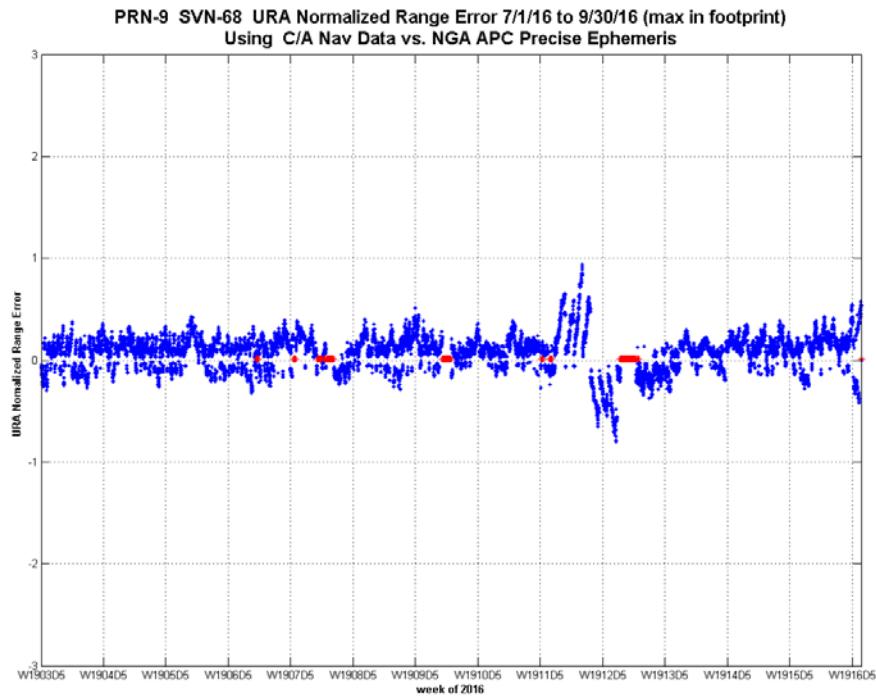
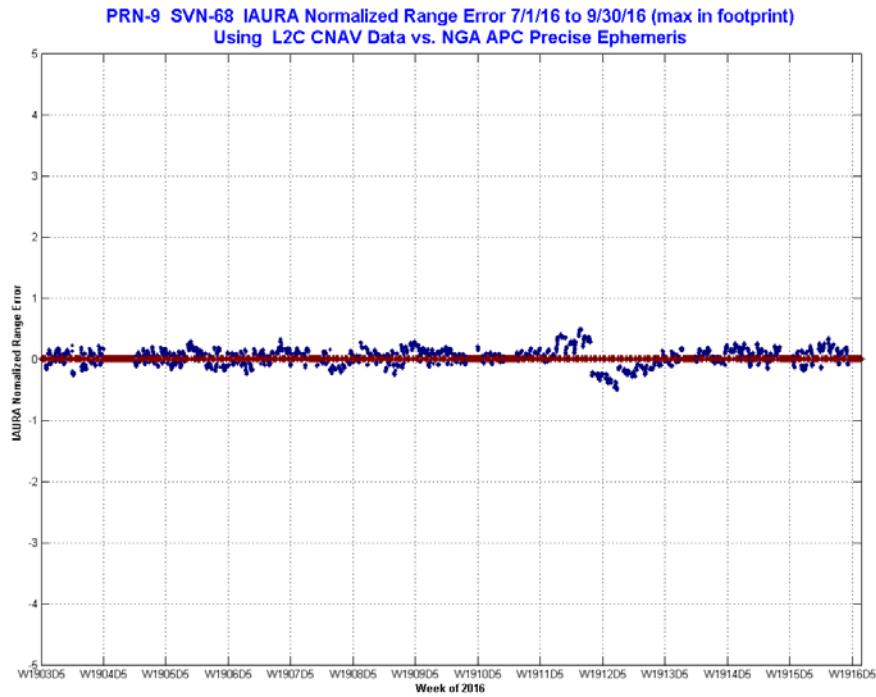
Figure 11-8.14, Timeline of URA Normalized Range Error PRN-9 SVN-68 Using C/A Nav Data**Figure 11-8.15, Timeline of IAURA Normalized Range Error PRN-9 SVN-68 Using L2C CNAV Data**

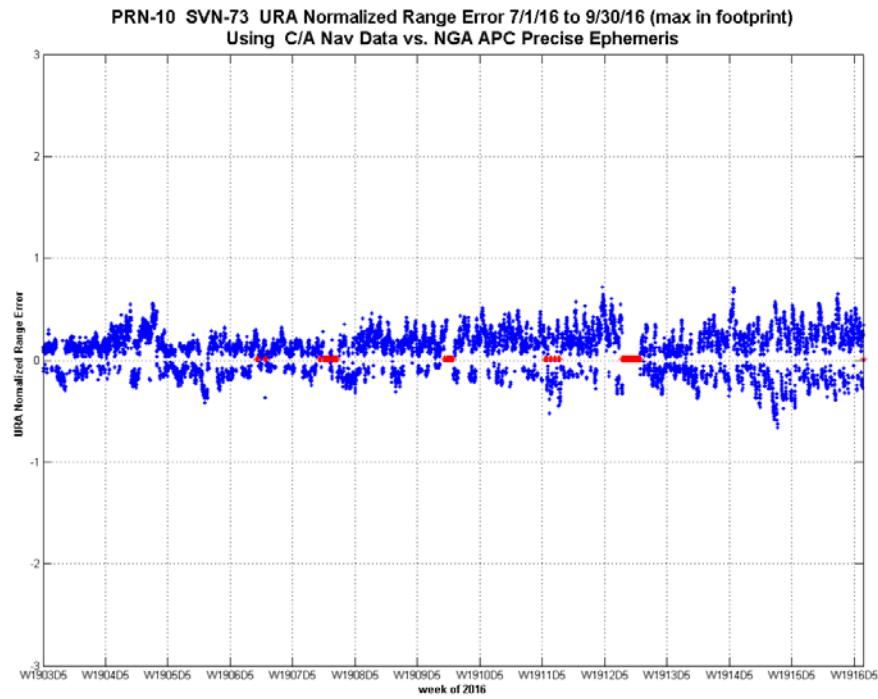
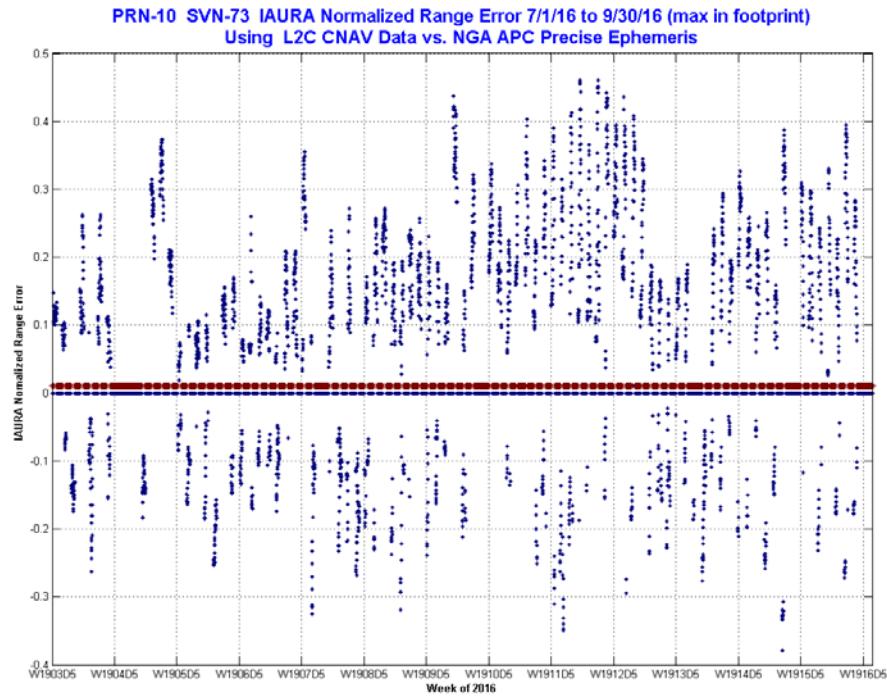
Figure 11-8.16, Timeline of URA Normalized Range Error PRN-10 SVN-73 Using C/A Nav Data**Figure 11-8.17, Timeline of IAURA Normalized Range Error PRN-10 SVN-73 Using L2C CNAV Data**

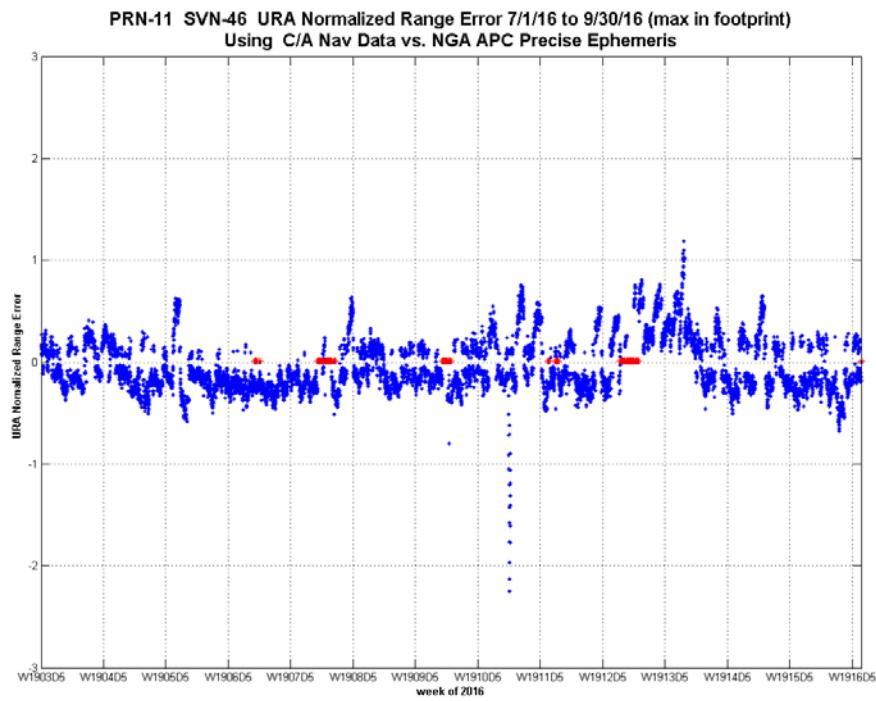
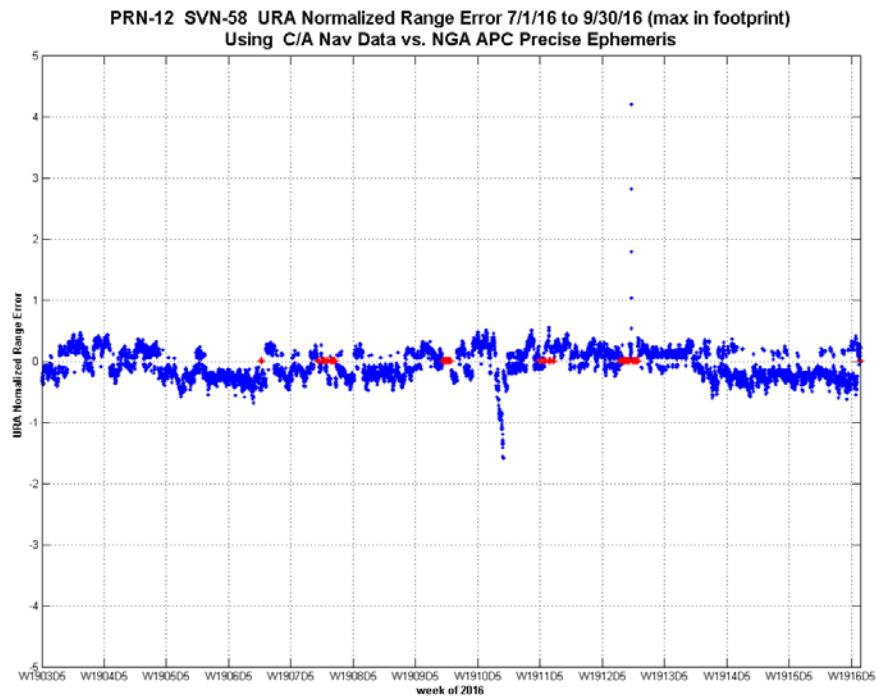
Figure 11-8.18, Timeline of URA Normalized Range Error PRN-11 SVN-46 Using C/A Nav Data**Figure 11-8.19, Timeline of URA Normalized Range Error PRN-12 SVN-58 Using C/A Nav Data**

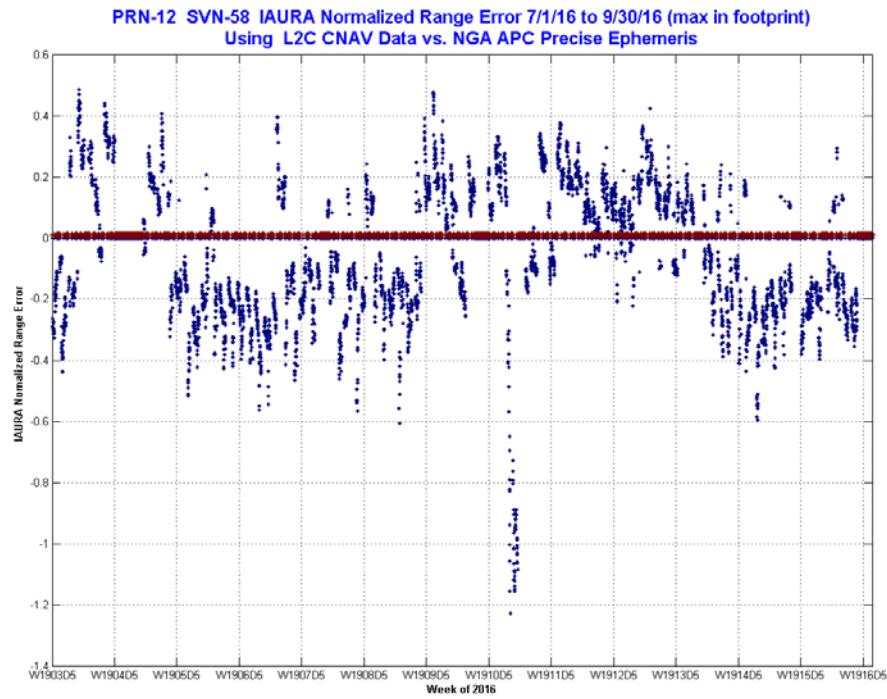
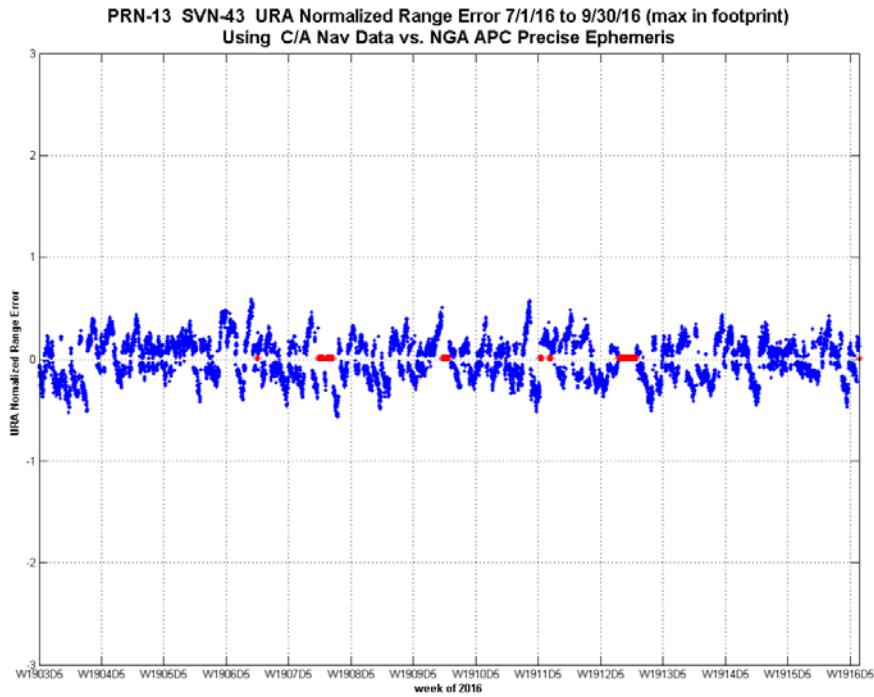
Figure 11-8.20, Timeline of IAURA Normalized Range Error PRN-12 SVN-58 Using L2C CNAV Data**Figure 11-8.21, Timeline of URA Normalized Range Error PRN-13 SVN-43 Using C/A Nav Data**

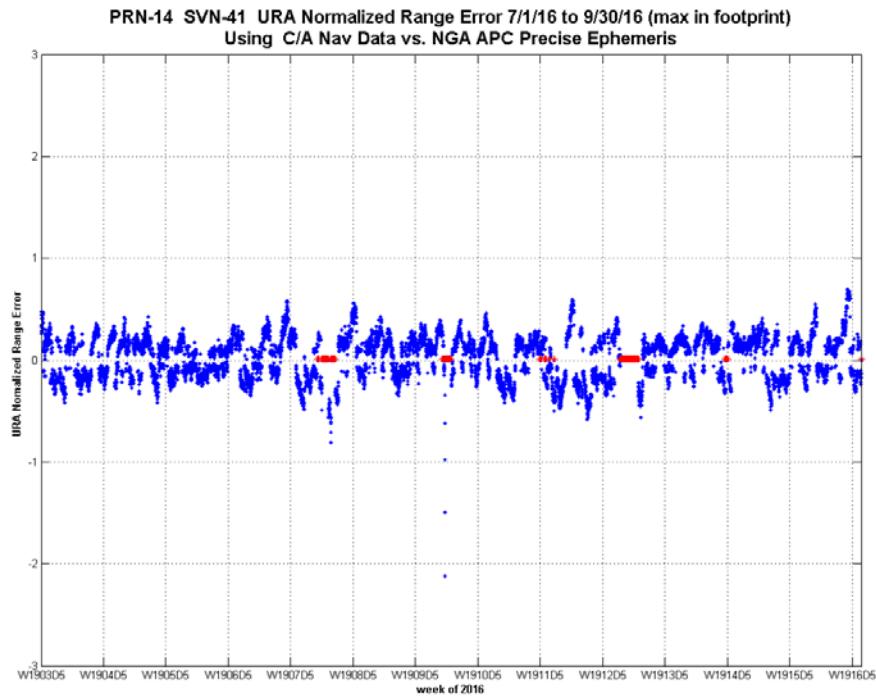
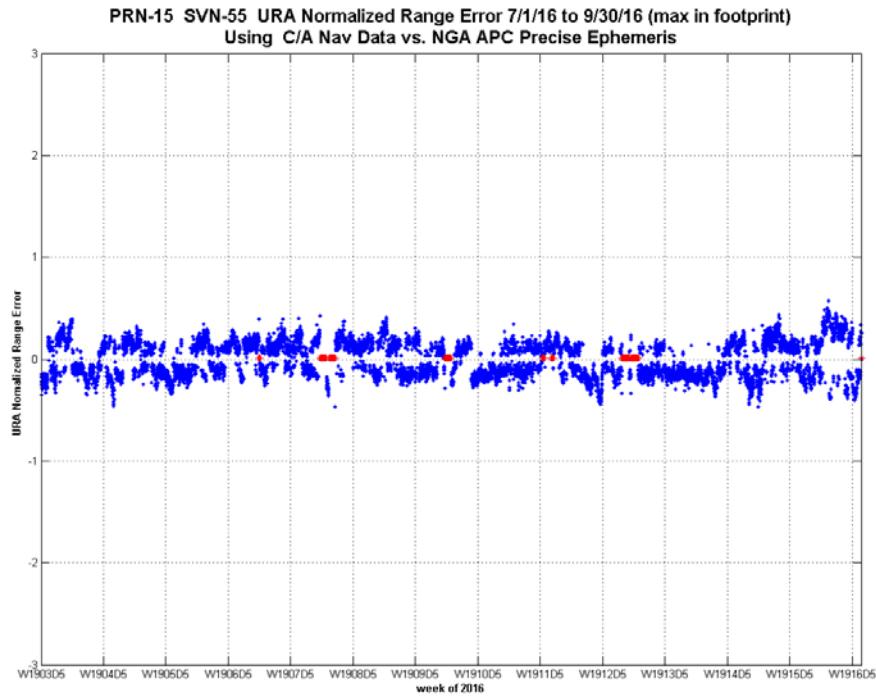
Figure 11-8.22, Timeline of URA Normalized Range Error PRN-14 SVN-41 Using C/A Nav Data**Figure 11-8.23, Timeline of URA Normalized Range Error PRN-15 SVN-55 Using C/A Nav Data**

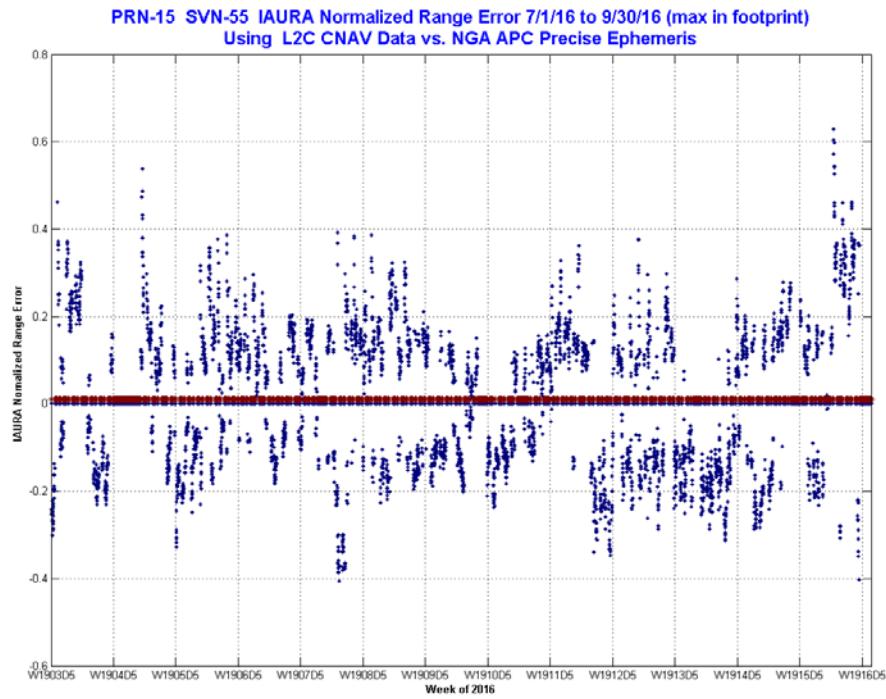
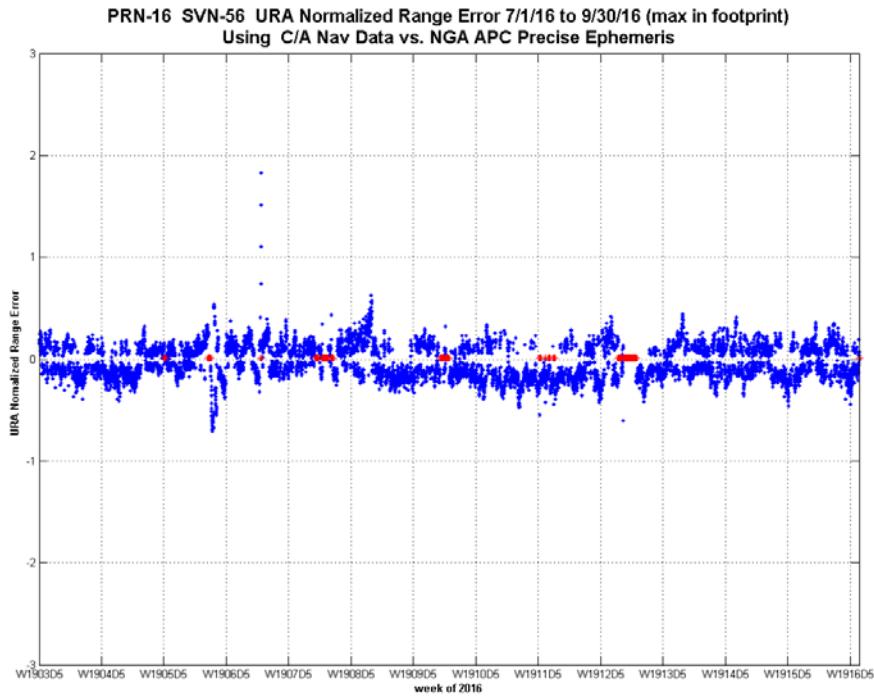
Figure 11-8.24, Timeline of IAURA Normalized Range Error PRN-15 SVN-55 Using L2C CNAV Data**Figure 11-8.25, Timeline of URA Normalized Range Error PRN-16 SVN-56 Using C/A Nav Data**

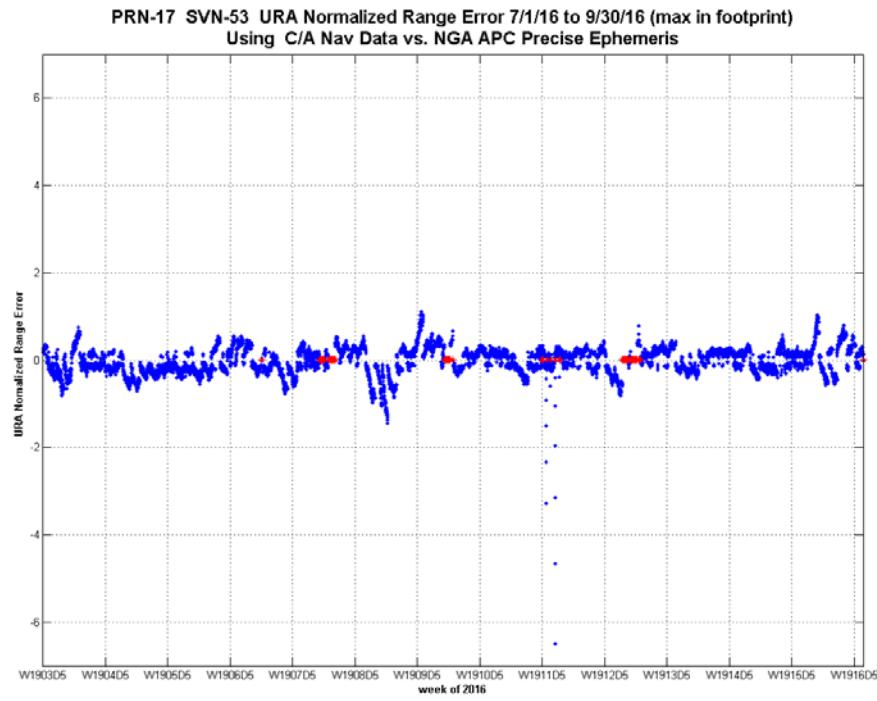
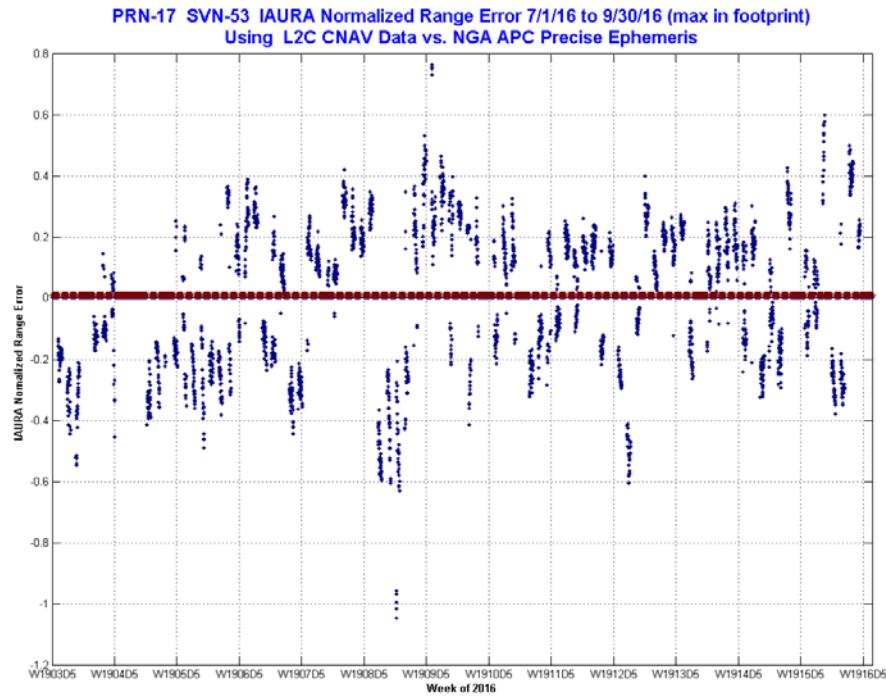
Figure 11-8.26, Timeline of URA Normalized Range Error PRN-17 SVN-53 Using C/A Nav Data**Figure 11-8.27, Timeline of IAURA Normalized Range Error PRN-17 SVN-53 Using L2C CNAV Data**

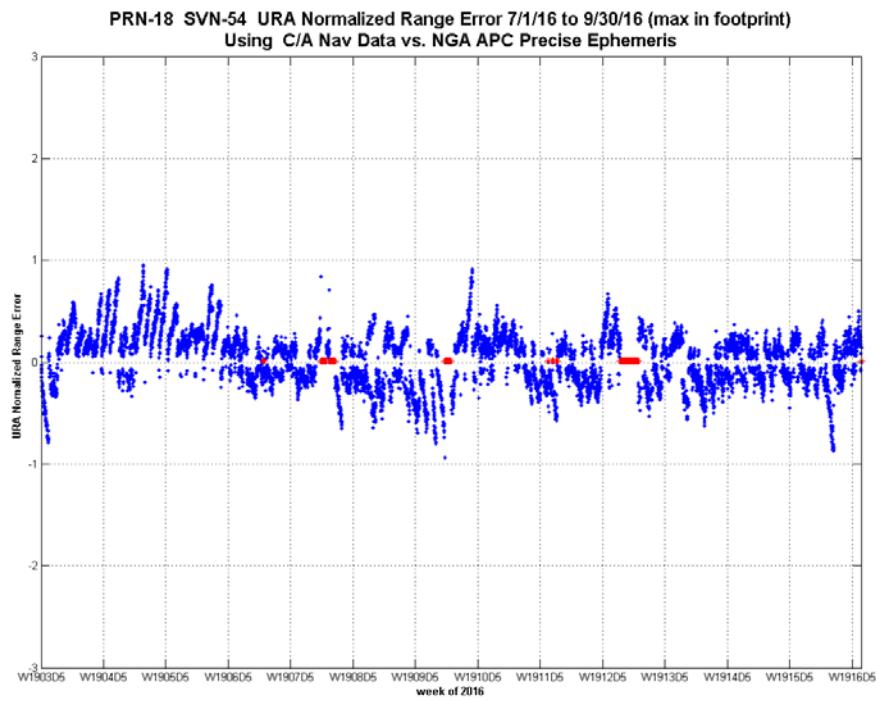
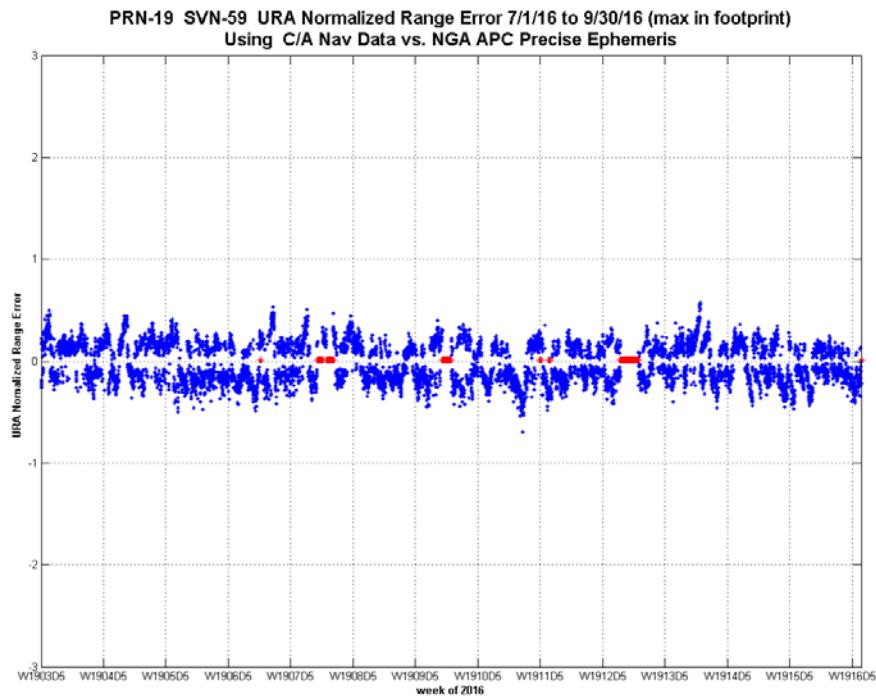
Figure 11-8.28, Timeline of URA Normalized Range Error PRN-18 SVN-54 Using C/A Nav Data**Figure 11-8.29, Timeline of URA Normalized Range Error PRN-19 SVN-59 Using C/A Nav Data**

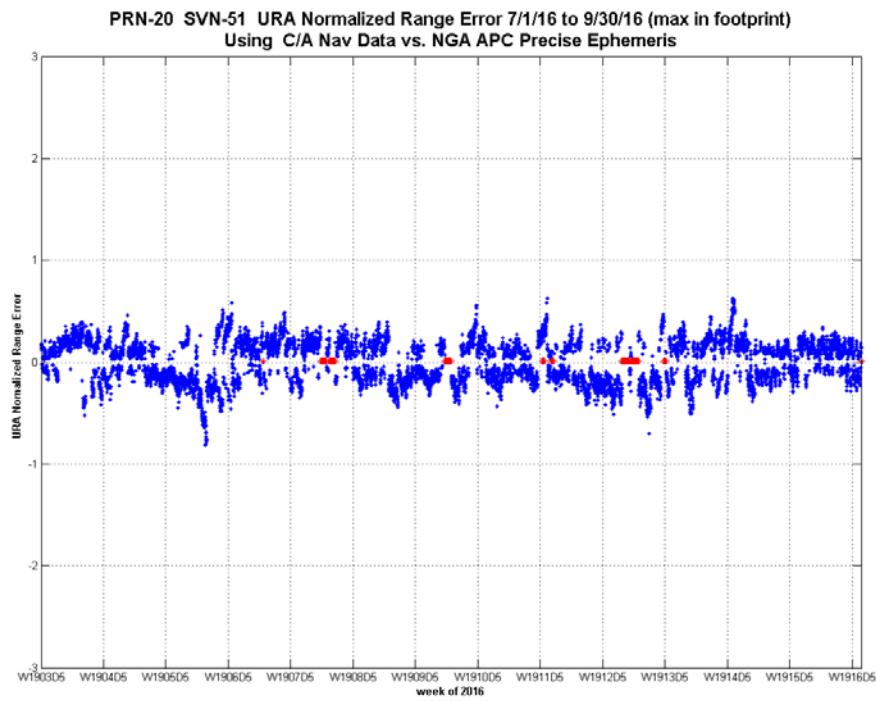
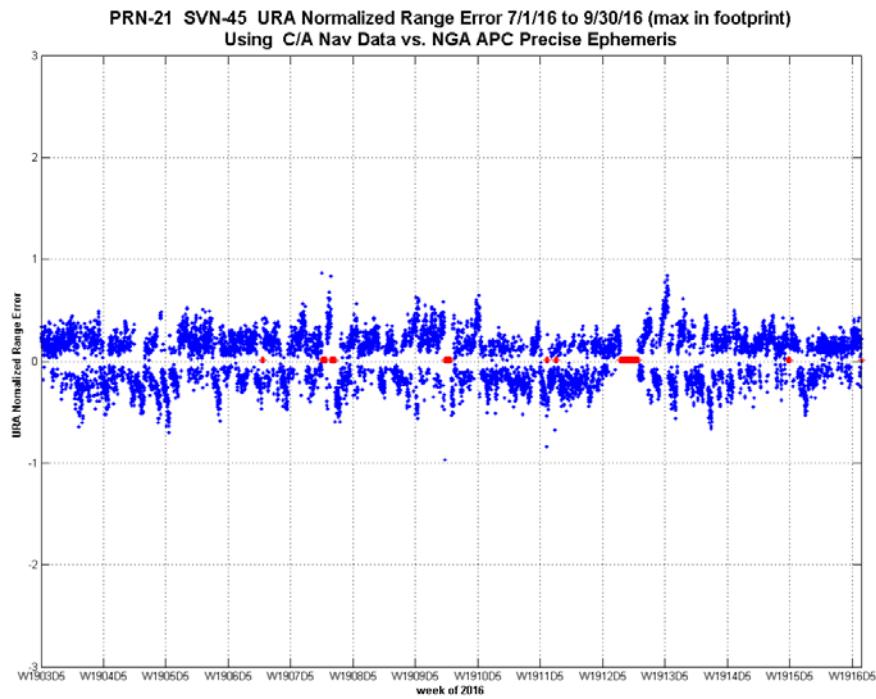
Figure 11-8.30, Timeline of URA Normalized Range Error PRN-20 SVN-51 Using C/A Nav Data**Figure 11-8.31, Timeline of URA Normalized Range Error PRN-21 SVN-45 Using C/A Nav Data**

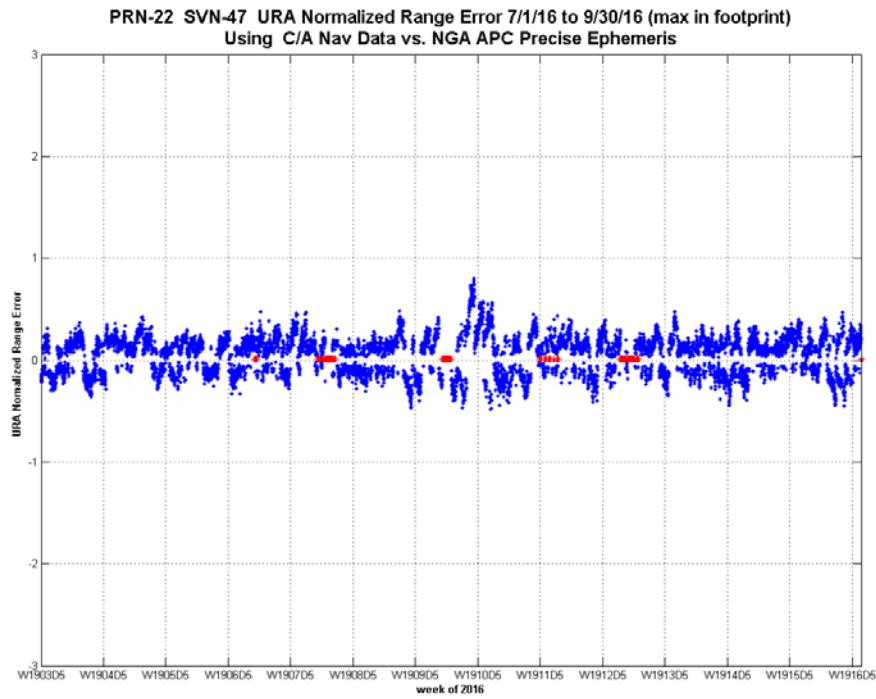
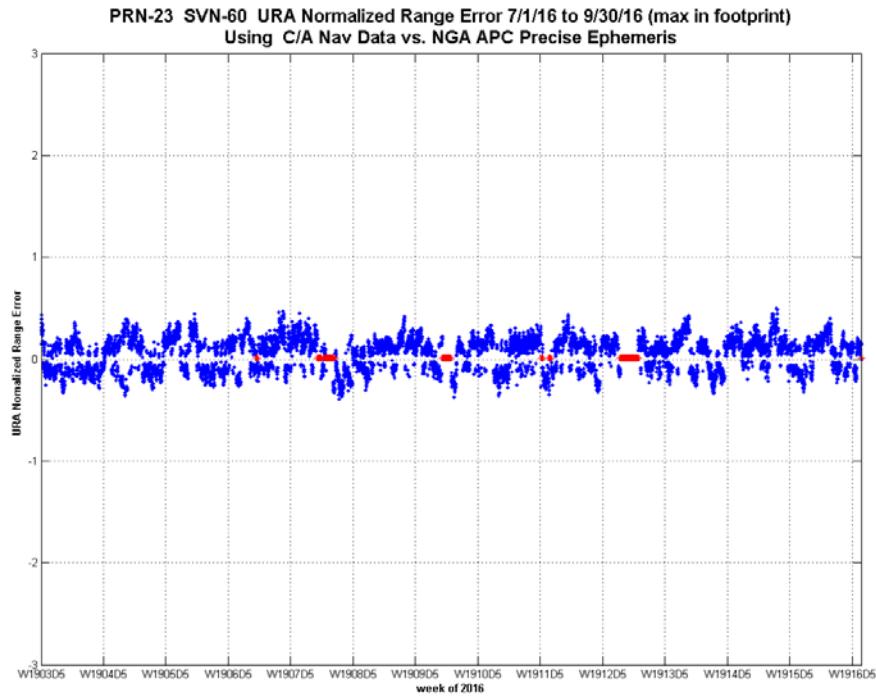
Figure 11-8.32, Timeline of URA Normalized Range Error PRN-22 SVN-47 Using C/A Nav Data**Figure 11-8.33, Timeline of URA Normalized Range Error PRN-23 SVN-60 Using C/A Nav Data**

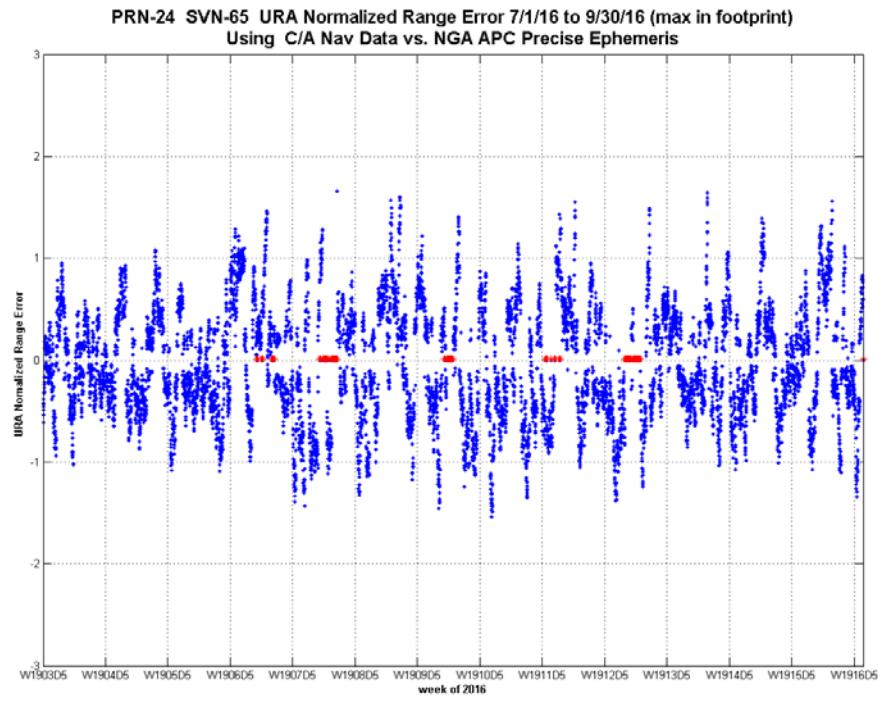
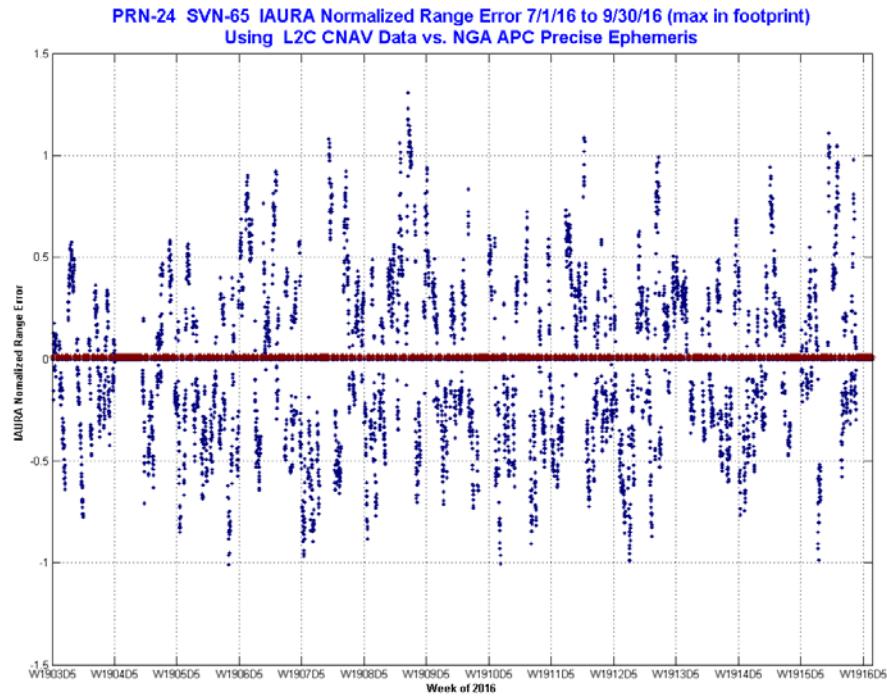
Figure 11-8.34, Timeline of URA Normalized Range Error PRN-24 SVN-65 Using C/A Nav Data**Figure 11-8.35, Timeline of IAURA Normalized Range Error PRN-24 SVN-65 Using L2C CNAV Data**

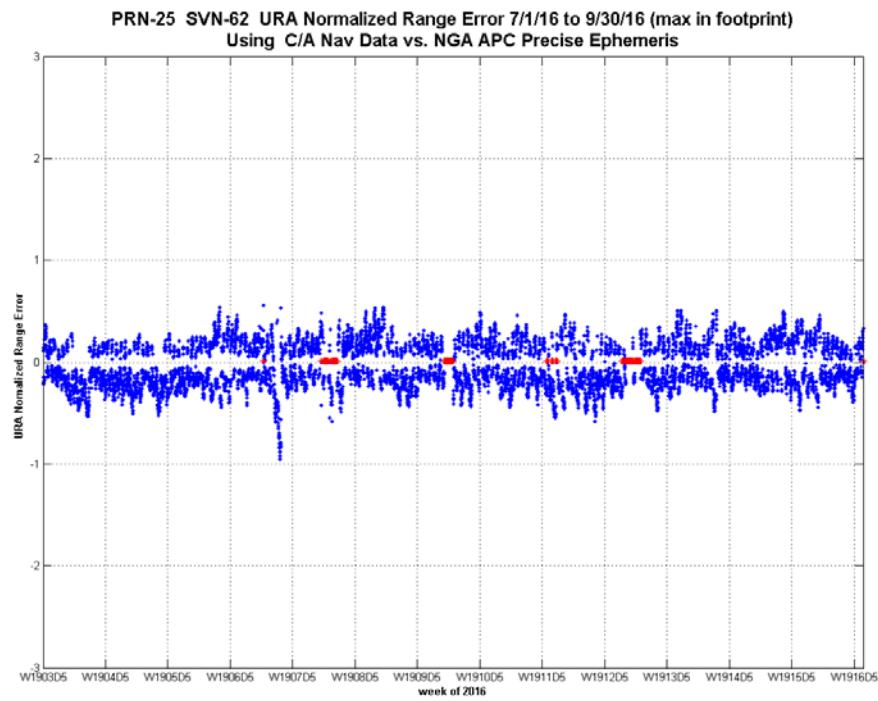
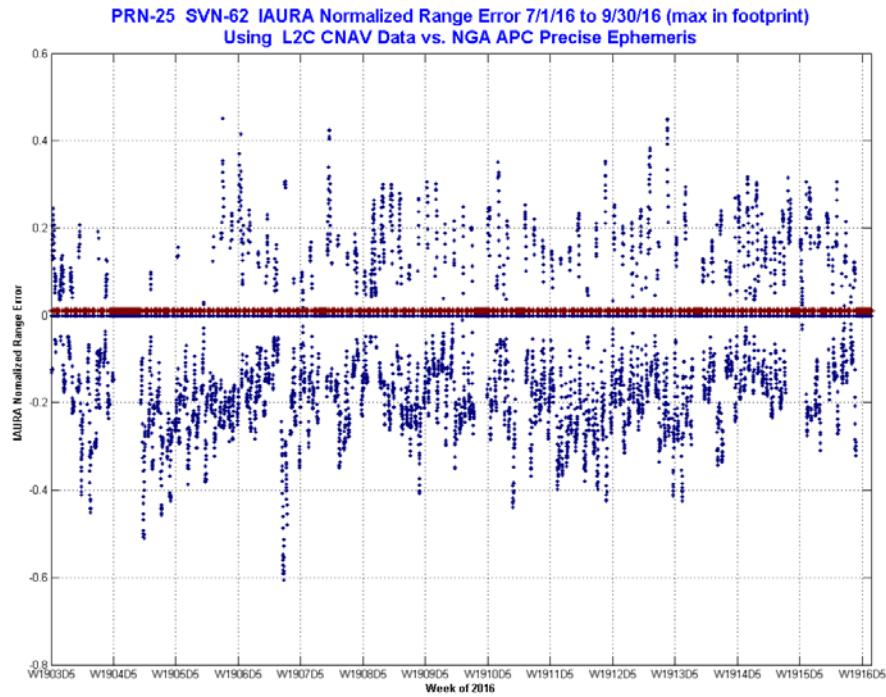
Figure 11-8.36, Timeline of URA Normalized Range Error PRN-25 SVN-62 Using C/A Nav Data**Figure 11-8.37, Timeline of IAURA Normalized Range Error PRN-25 SVN-62 Using L2C CNAV Data**

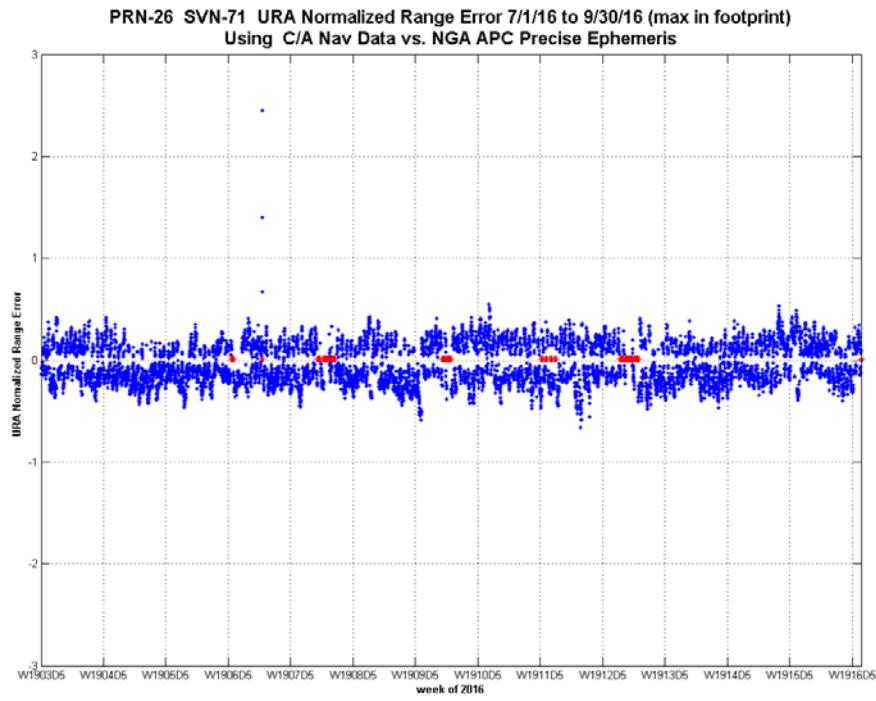
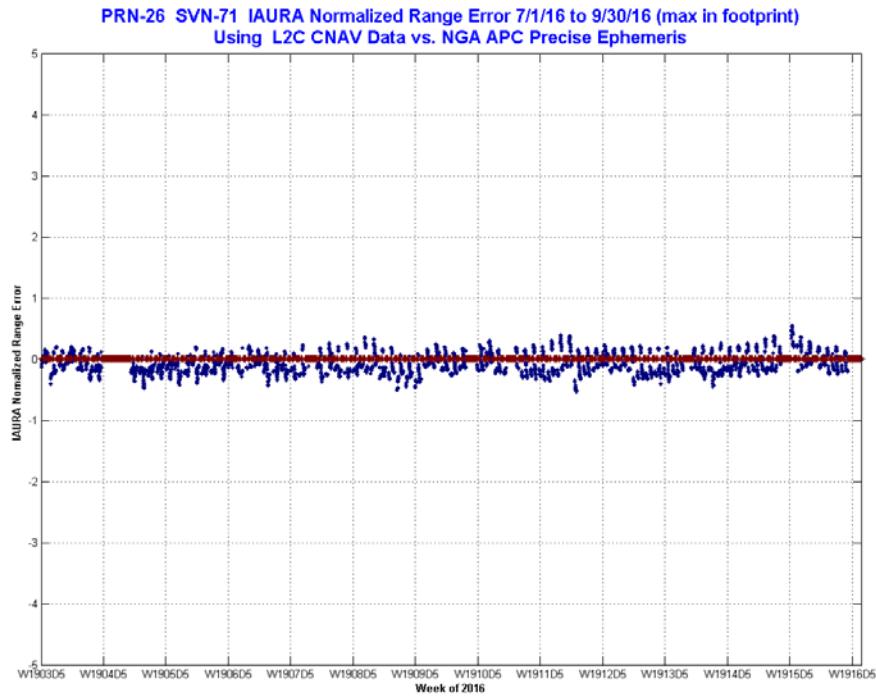
Figure 11-8.38, Timeline of URA Normalized Range Error PRN-26 SVN-71 Using C/A Nav Data**Figure 11-8.39, Timeline of IAURA Normalized Range Error PRN-26 SVN-71 Using L2C CNAV Data**

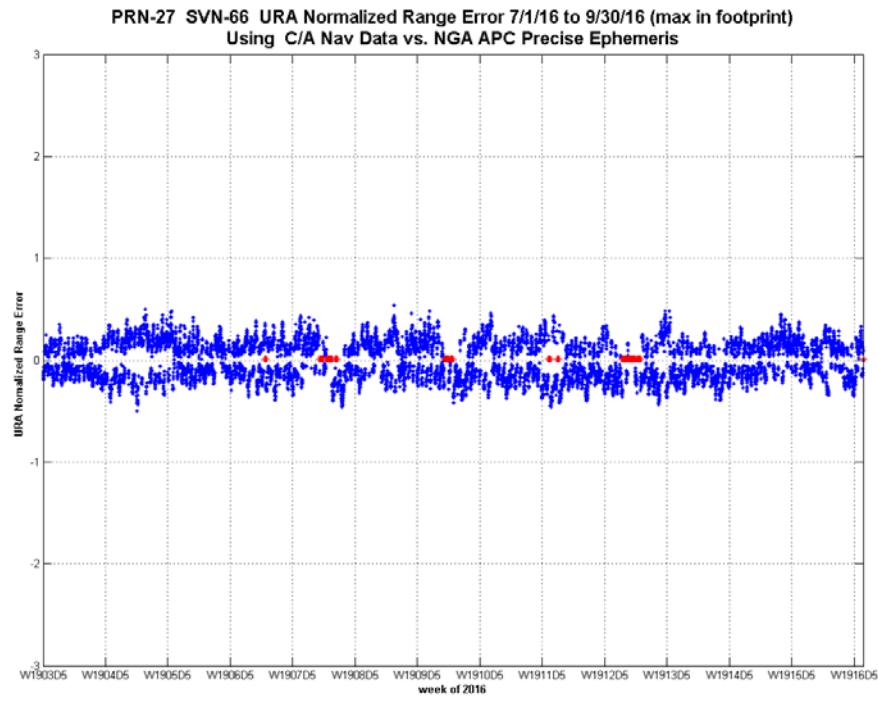
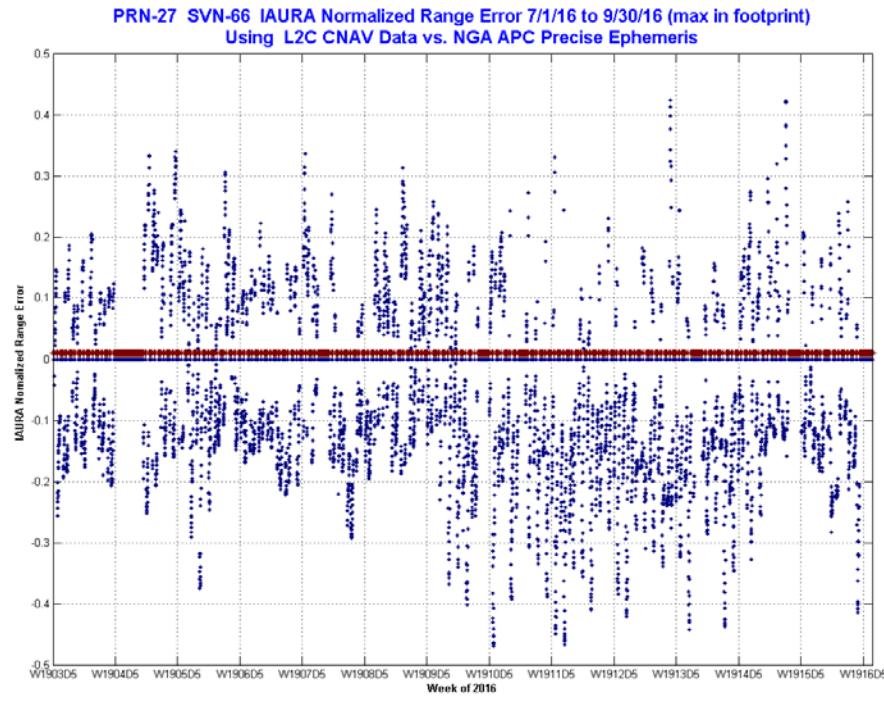
Figure 11-8.40, Timeline of URA Normalized Range Error PRN-27 SVN-66 Using C/A Nav Data**Figure 11-8.41, Timeline of IAURA Normalized Range Error PRN-27 SVN-66 Using L2C CNAV Data**

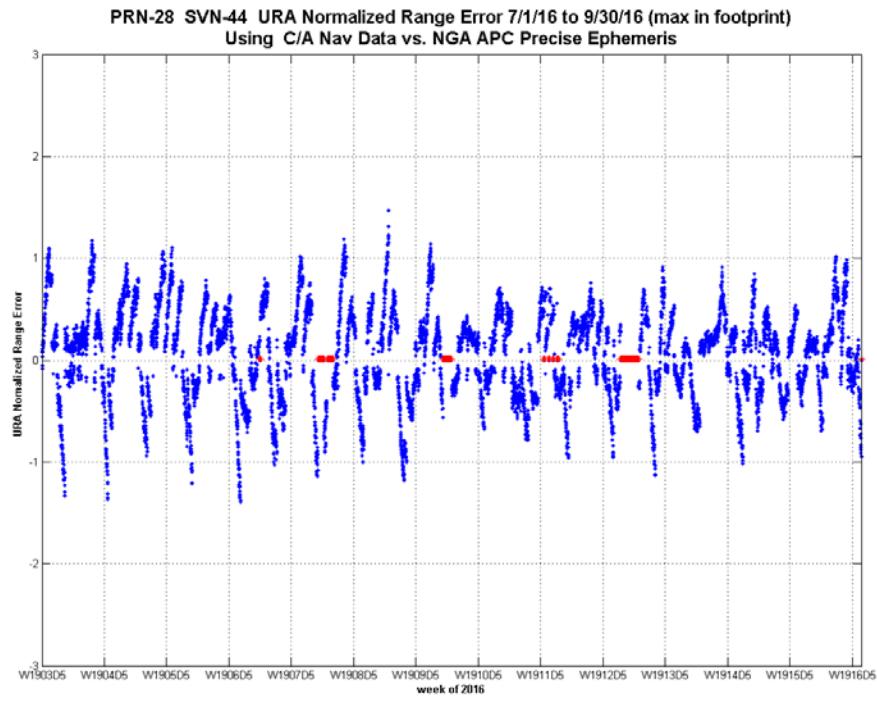
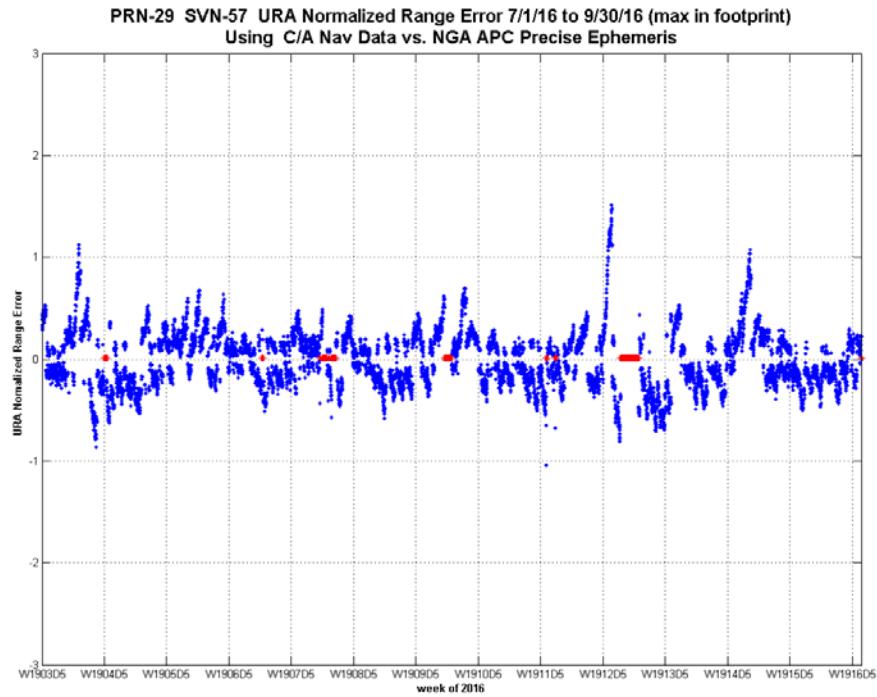
Figure 11-8.42, Timeline of URA Normalized Range Error PRN-28 SVN-44 Using C/A Nav Data**Figure 11-8.43, Timeline of URA Normalized Range Error PRN-29 SVN-57 Using C/A Nav Data**

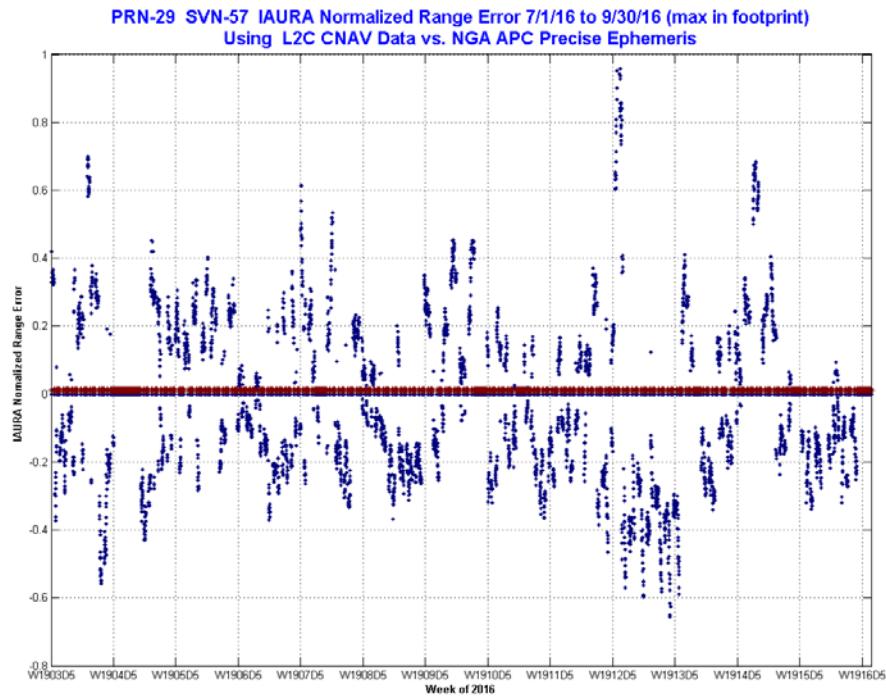
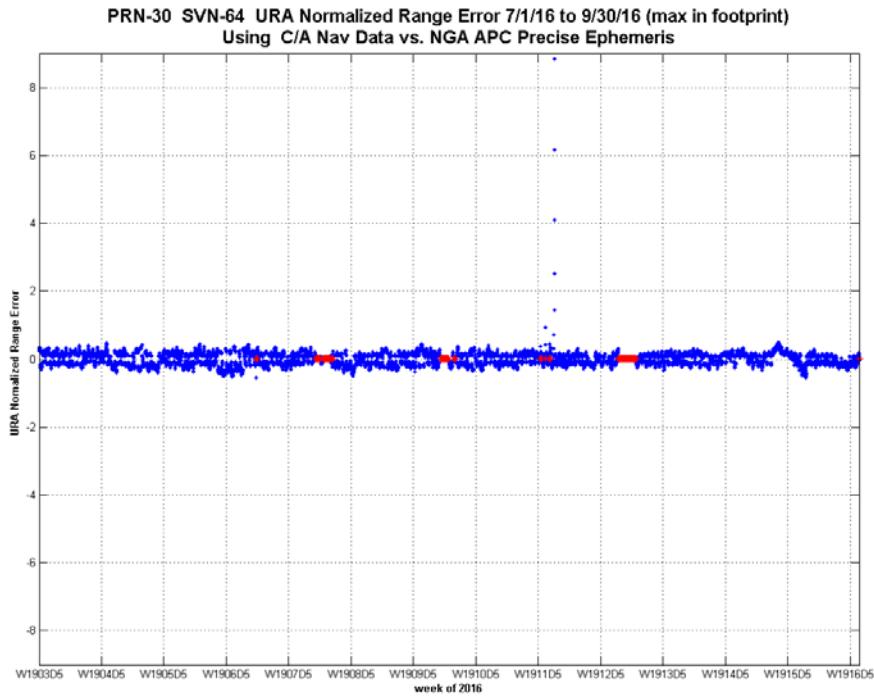
Figure 11-8.44, Timeline of IAURA Normalized Range Error PRN-29 SVN-57 Using L2C CNAV Data**Figure 11-8.45, Timeline of URA Normalized Range Error PRN-30 SVN-64 Using C/A Nav Data**

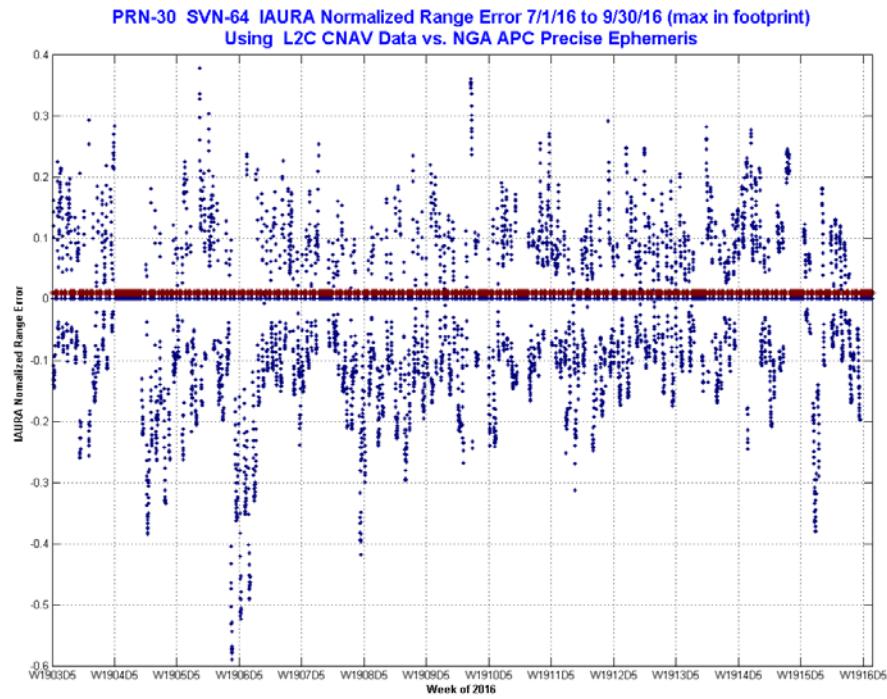
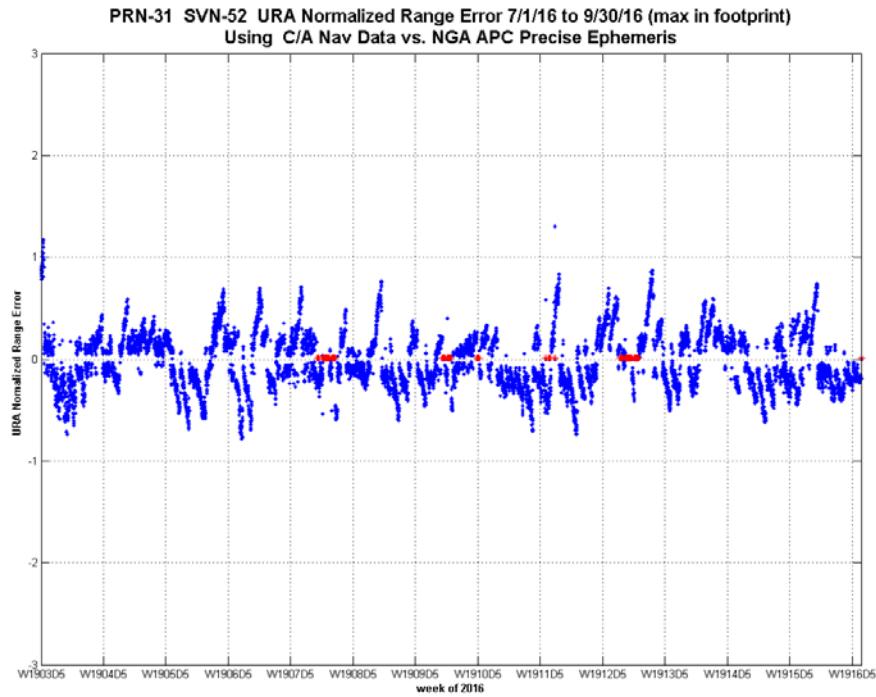
Figure 11-8.46, Timeline of IAURA Normalized Range Error PRN-30 SVN-64 Using L2C CNAV Data**Figure 11-8.47, Timeline of URA Normalized Range Error PRN-31 SVN-52 Using C/A Nav Data**

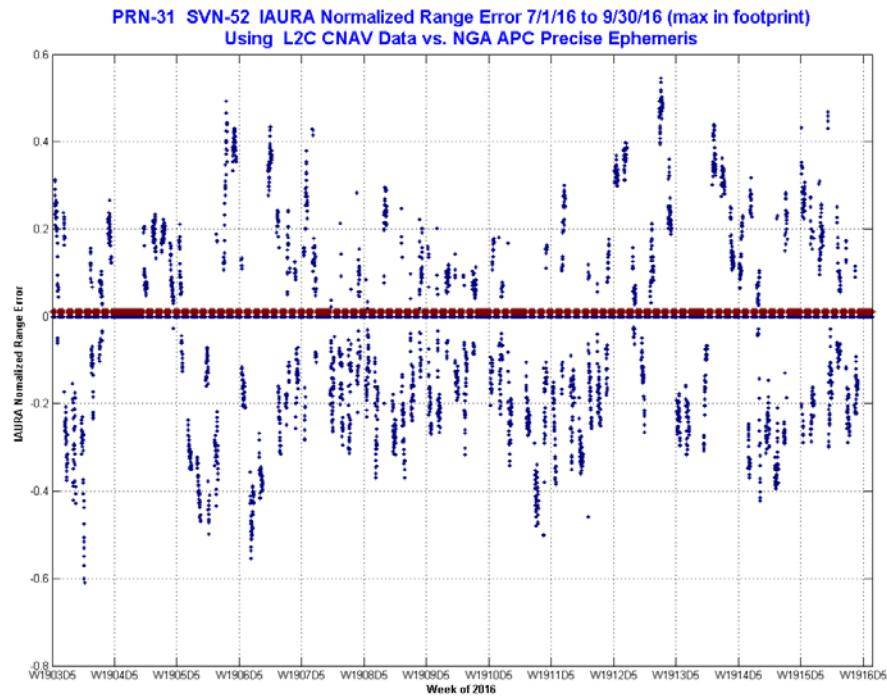
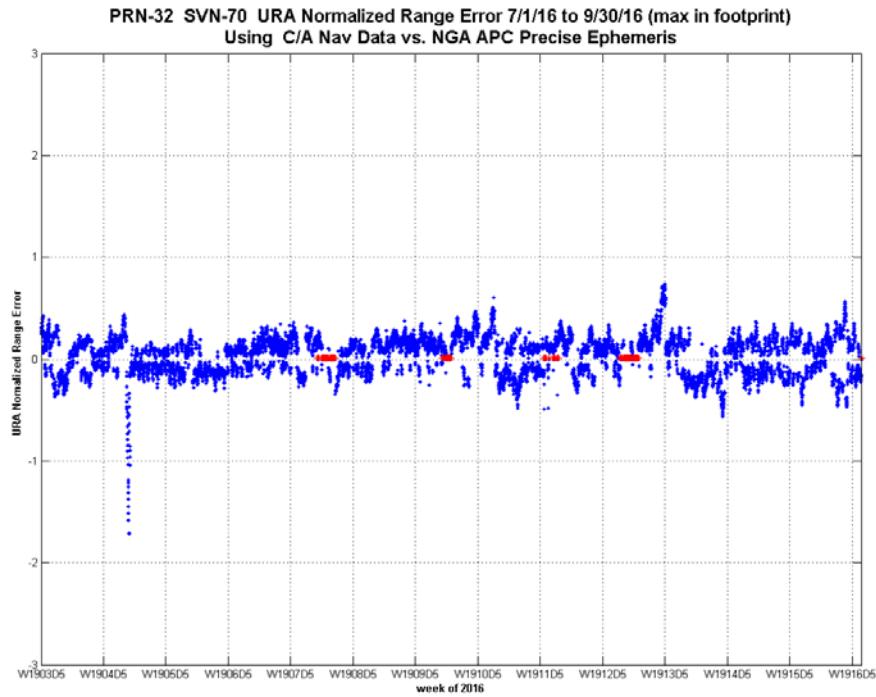
Figure 11-8.48, Timeline of IAURA Normalized Range Error PRN-31 SVN-52 Using L2C CNAV Data**Figure 11-8.49, Timeline of URA Normalized Range Error PRN-32 SVN-70 Using C/A Nav Data**

Figure 11-8.50, Timeline of IAURA Normalized Range Error PRN-32 SVN-70 Using L2C CNAV Data